


NOTES

1 – ALL DIMENSION ARE IN MILLIMETERS UNLESS OTHERWISE STATED.



REFERENCE DRAWING	DRG. No.
Specification For Concrete Work	BK-CNRL-2500-000-07-SF-0001
Specification For Sewerage & Drainage	BK-CNRL-2500-000-07-SF-0005
Underground System Catch Basin & Dry Tower	NUOC-50-1000-1/10-AS
Design Notes > Reinforced-Concrete, Structures	BK-CNRL-2500-000-07-SF-0008
SIPHON PIPE SEAL, TOLER REINFORCEMENT & LADDER RUNGS	NUOC-50-1000-10/10-AS
STANDARD DETAILS OF MISCELLANEOUS ITEMS	BK-CNRL-2500-000-07-DW-0040



KEY PLAN

							</					

تأیید و کلیه نسخ این نقشه و جز اصلاحی طبق به ترک قبل مطابق با جز جدید می باشد.
THE ORIGINAL AND ALL COPIES OF THIS DRAWING TOGETHER WITH THE COPYRIGHT THEREIN ARE THE SOLE PROPERTY OF N.I.S.O.C./ FIELDS


BINAQ OILFIELD DEVELOPMENT GENERAL

DATE SCALE DRAWING BY CHECKED BY PROJECT ENG.


NO CONTRIBUTION PERMITTED UNLESS DRAWING APPROVED

APPROVED FOR CONSTRUCTION BY: DATE:

BUDGET REF. LOCATION SIZE CLASS SERIAL NO. SHEET REVISION

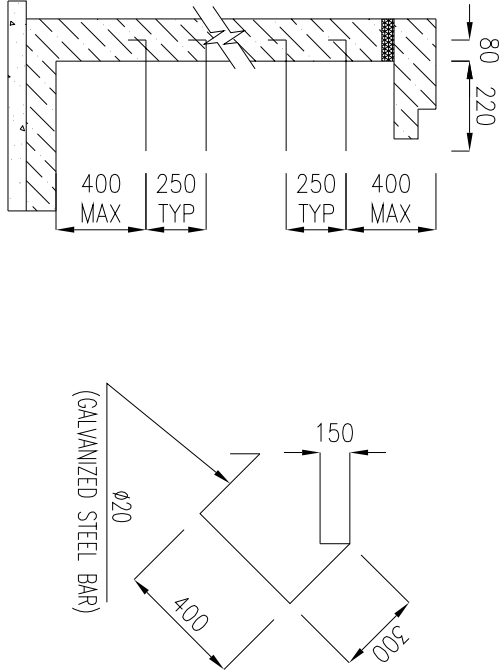

N.T.S 2 LADDER RUNGS DETAIL (ONLY FOR H ≥ 1050)

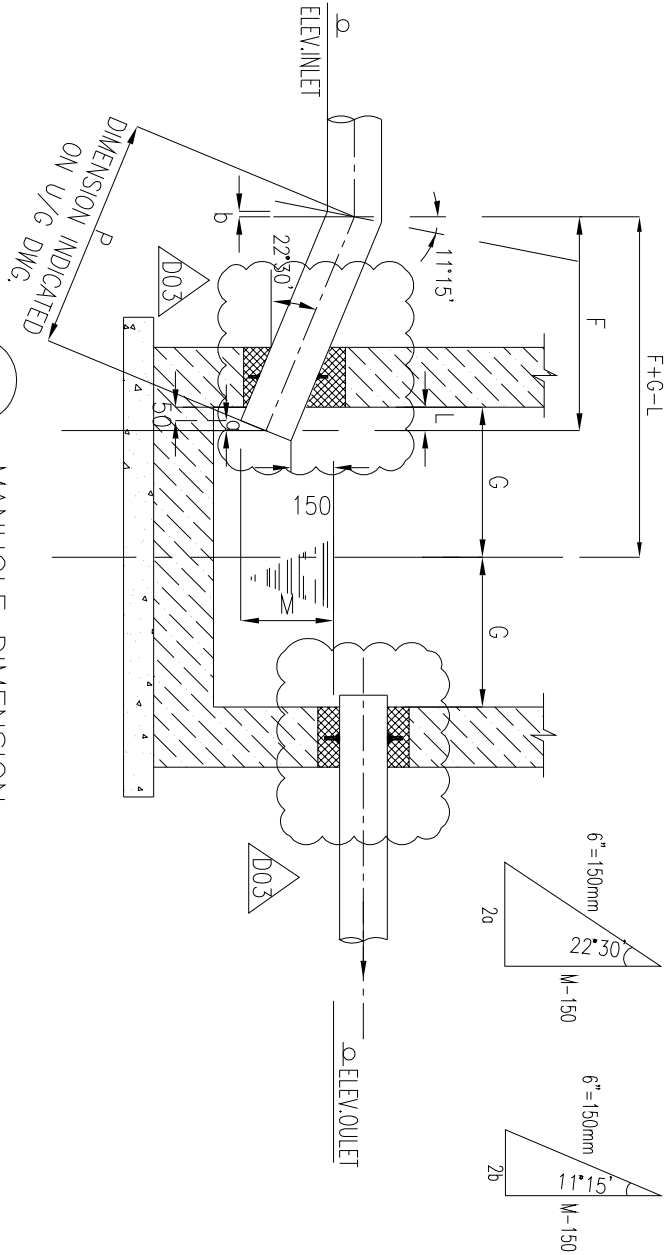

N.T.S 1 MANHOLE DIMENSION


VALUE OF (a-b) M & L RELEVANT TO INLET PIPE DIAMETER		
INLET PIPE DIAMETER	a - b	M L
ø4"	10	250 70
ø6"	15	310 80
ø8"	20	360 90
ø10"	25	402 102
ø12"	30	448 112
ø14"	33	478 118
ø16"	37	525 128
ø18"	42	572 137
ø20"	47	618 147
ø24"	56	713 167
ø28"	66	807 186
ø32"	75	901 205

DETERMINATION OF DIMENSION "P" TO BE INDICATED ON U/G DWG.

$F=2.414*(ELEV.INLET-ELEV.OUTLET)+M+(a-b)$

$P=1.08*F$

SIPHON PIPE SEAL TO 22°30'

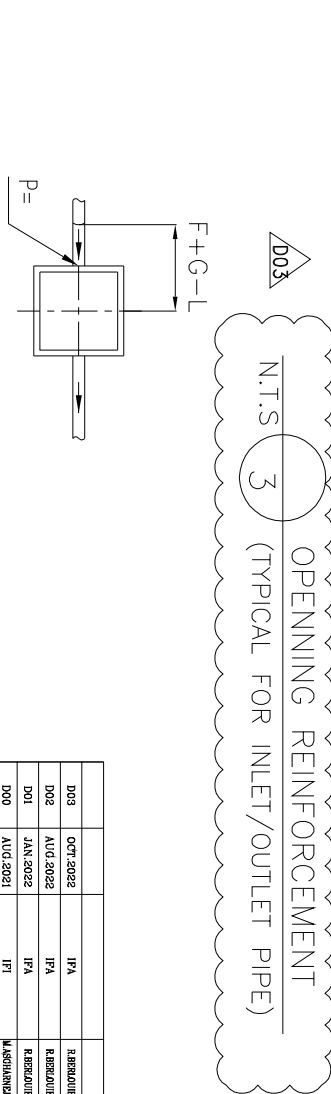

N.T.S 3 OPENING REINFORCEMENT (TYPICAL FOR INLET/OUTLET PIPE)

N.T.S 4 SYMBOL ON U/G DWG