

 NISOC	نگهداشت و افزایش تولید میدان نفتی بینک سطح الارض و ابنیه تحت الارض عمومی و مشترک								
شماره پیمان: 053 – 073 – 9184	Standard Detail Drawing for Pressure Vessels and Heat Exchangers							شماره صفحه : 1 از 56	
	پروژه	بسته کاری	صادرکننده	تسهیلات	رشته	نوع مدرک	سریال		نسخه
	BK	GNRAL	PEDCO	000	ME	DW	0001		D02

طرح نگهداشت و افزایش تولید 27 مخزن

STANDARD DETAIL DRAWING FOR PRESSURE VESSELS AND HEAT EXCHANGERS

نگهداشت و افزایش تولید میدان نفتی بینک

D02	DEC.2022	FI	H.Adineh	M.Fakharian	M.Mehrshad	
D01	AUG. 2022	IFI	H.Adineh	M.Fakharian	M.Mehrshad	
D00	AUG. 2021	IFI	M.Asgharnejad	M.Fakharian	Sh.Ghalikar	
Rev.	Date	Purpose of Issue/Status	Prepared by:	Checked by:	Approved by:	CLIENT Approval

Class: 3

CLIENT Doc. Number: F2C-707123

Status:

IDC: Inter-Discipline Check
 IFC: Issued For Comment
 IFA: Issued For Approval
 AFD: Approved For Design
 AFC: Approved For Construction
 AFP: Approved For Purchase
 AFQ: Approved For Quotation
 IFI: Issued For Information
 AB-R: As-Built for CLIENT Review
 AB-A: As-Built –Approved

 NISOC	نگهداشت و افزایش تولید میدان نفتی بینک سطح الارض و ابنیه تحت الارض عمومی و مشترک							 شماره صفحه : 2 از 56
شماره پیمان: 053 - 073 - 9184	Standard Detail Drawing for Pressure Vessels and Heat Exchangers							
	پروژه	بسته کاری	صادرکننده	تسهیلات	رشته	نوع مدرک	سریال	
	BK	GNRAL	PEDCO	000	ME	DW	0001	D02

REVISION RECORD SHEET

PAGE	D00	D01	D02	D03	D04
1	X	X	X		
2	X	X	X		
3	X	X			
4	X	X			
5	X	X			
6	X	X			
7	X	X			
8	X	X			
9	X	X			
10	X	X			
11	X	X			
12	X	X			
13	X	X			
14	X	X			
15	X	X			
16	X	X			
17	X	X			
18	X	X			
19	X	X			
20	X	X			
21	X	X			
22	X	X			
23	X	X			
24	X	X			
25	X	X			
26	X	X			
27	X	X			
28	X	X			
29	X	X			
30	X	X			
31	X	X			
32	X	X			
33	X	X			
34	X	X			
35	X	X			
36	X	X			
37	X	X			
38	X	X			
39	X	X			
40	X	X			
41	X	X			
42	X	X			
43	X	X			
44	X	X			
45	X	X			
46	X	X			
47	X	X			
48	X	X			
49	X	X			
50	X	X			
51	X	X			
52	X	X			
53	X	X			
54	X	X			
55	X	X			
56		X			
57					
58					
59					
60					
61					
62					
63					
64					
65					

PAGE	D00	D01	D02	D03	D04
66					
67					
68					
69					
70					
71					
72					
73					
74					
75					
76					
77					
78					
79					
80					
81					
82					
83					
84					
85					
86					
87					
88					
89					
90					
91					
92					
93					
94					
95					
96					
97					
98					
99					
100					
101					
102					
103					
104					
105					
106					
107					
108					
109					
110					
111					
112					
113					
114					
115					
116					
117					
118					
119					
120					
121					
122					
123					
124					
125					
126					
127					
128					
129					
130					

 NISOC	نگهداشت و افزایش تولید میدان نفتی بینک سطح الارض و ابنیه تحت الارض عمومی و مشترک							 شرکت توسعه و ترابریان  HIRGAN ENERGY 	
شماره پیمان: 053 – 073 – 9184	Standard Detail Drawing for Pressure Vessels and Heat Exchangers							شماره صفحه : 3 از 56	
	پروژه	بسته کاری	صادرکننده	تسهیلات	رشته	نوع مدرک	سریال		نسخه
	BK	GNRAL	PEDCO	000	ME	DW	0001		D02

CONTENTS

1.0	INTRODUCTION	4
2.0	SCOPE	4
3.0	NORMATIVE REFERENCES.....	5
3.1	LOCAL CODES AND STANDARDS	5
3.2	INTERNATIONAL CODES AND STANDARDS	5
3.3	THE PROJECT DOCUMENTS.....	6
4.	STANDARD DRAWINGS.....	7
4.1	LIFTING LUG TO LIFT VERTICAL VESSEL UP TO 60 TONES	7
4.2	LIFTING LUG TO LIFT VERTICAL VESSEL UP TO 200 TONES	9
4.3	LIFTING LUG TO LIFT HORIZONTAL VESSEL.....	11
4.4	VERTICAL VESSEL SUPPORT SKIRT OPENING DETAILS	13
4.5	SUPPORT LEG AND BASE PLATE DETAILS	16
4.6	VESSEL BASE SUPPORT LUGS FOR ANCHOR BOLTS	20
4.7	SADDLE DETAILS FOR HORIZONTAL VESSELS	21
4.8	NOZZLE DETAILS	22
4.9	TANGENTIAL NOZZLE WELD DETAILS.....	23
4.10	HINGE AND DAVIT DETAILS FOR MANHOLES.....	24
4.11	VORTEX BREAKERS DETAILS	27
4.12	BAFFLE FOR COLUMN & DRUM	28
4.13	TYPICAL DETAILS VESSEL PLATFORM AND LADDERS	30
4.14	FABRICATION DIMENSIONAL TOLERANCES FOR PRESSURE VESSELS	44
4.15	VERTICAL VESSEL-INSULATION AND FIREPROOFING SUPPORTS	48
4.16	HORIZONTAL VESSEL INSULATION SUPPORTS	50
4.17	TEMPLATE FOR VERTICAL VESSELS	51
4.18	EARTHING BOSS	52
4.19	NAME PLATE FOR PRESSURE VESSELS.....	53
4.20	NAME PLATE FOR PLATE & FRAME HEAT EXCHANGERS.....	55

 NISOC	نگهداشت و افزایش تولید میدان نفتی بینک سطح الارض و ابنیه تحت الارض عمومی و مشترک							 شرکت توسعه و ترابریان  HIRGAN ENERGY 	
شماره پیمان: 053 – 073 – 9184	Standard Detail Drawing for Pressure Vessels and Heat Exchangers							شماره صفحه : 4 از 56	
	پروژه	بسته کاری	صادرکننده	تسهیلات	رشته	نوع مدرک	سریال		نسخه
	BK	GNRAL	PEDCO	000	ME	DW	0001		D02

1.0 INTRODUCTION

Binak oilfield in Bushehr province, a part of the southern oilfields of Iran, is located 20 km northwest of Genaveh city.

With the aim of increasing production of oil from Binak oilfield, an EPC/EPD Project has been defined by NIOC/NISOC and awarded to Petro Iran Development Company (PEDCO). Also PEDCO (as General Contractor) has assigned the EPC-packages of the Project to "Hirgan Energy - Design and Inspection" JV.

GENERAL DEFINITION

The following terms shall be used in this document.

CLIENT:	National Iranian South Oilfields Company (NISOC)
PROJECT:	Binak Oilfield Development – General Facilities
GENERAL CONTRACTOR (GC):	Petro Iran Development Company (PEDCO)
EPC CONTRACTOR:	Joint Venture of : Hirgan Energy – Design & Inspection(D&I) Companies
VENDOR:	The firm or person who will fabricate the equipment or material.
EXECUTOR:	Executor is the party which carries out all or part of construction and/or commissioning for the project.
THIRD PARTY INSPECTOR (TPI):	The firm appointed by EPD/EPC CONTRACTOR(GC) and approved by CLIENT (in writing) for the inspection of goods.
SHALL:	Is used where a provision is mandatory.
SHOULD:	Is used where a provision is advisory only.
WILL:	Is normally used in connection with the action by CLIENT rather than by an EPC/EPD CONTRACTOR, supplier or VENDOR.
MAY:	Is used where a provision is completely discretionary.

2.0 SCOPE

The purpose of this document is to provide the standard drawings for the all accessories of pressure vessels and heat exchangers used in this project.

It shall be used in conjunction with data/requisition sheets for present document subject.

 NISOC	نگهداشت و افزایش تولید میدان نفتی بینک سطح الارض و ابنیه تحت الارض عمومی و مشترک								
شماره پیمان: 053 – 073 – 9184	Standard Detail Drawing for Pressure Vessels and Heat Exchangers							شماره صفحه : 5 از 56	
	پروژه	بسته کاری	صادرکننده	تسهیلات	رشته	نوع مدرک	سریال		نسخه
	BK	GNRAL	PEDCO	000	ME	DW	0001	D02	

3.0 NORMATIVE REFERENCES

The latest edition of following codes & standards are applicable in this project (unless otherwise mentioned):

3.1 LOCAL CODES AND STANDARDS

- IPS-G-ME-150 Iranian Petroleum Standard– Engineering & Material Standard for Towers , Reactors, Pressure vessels & Internals
- IPS-M-PI-130 Iranian Petroleum Standard–Material & Equipment Standard for Pig Launching & Receiving Traps
- IPS-E-PI-240 Iranian Petroleum Standard– Engineering Standard for Plant Piping Systems
- IPS-G-GN-210 Iranian Petroleum Standard–General Standard for Packing & Packages
- IPS-E-CE-210 Iranian Petroleum Standard–Engineering Standard for Steel Structures
- IPS Standard Drawings
 - IPS-D-ME-002 Lifting Lug to Lift Vessels Up to 60 Tons
 - IPS-D-ME-003 Lifting Lug to Lift Vessels Up to 200 Tons
 - IPS-D-ME-010 Vertical Vessels Support Skirt
 - IPS-D-ME-011 Support Leg and Base
 - IPS-D-ME-030 Vortex Breaker
 - IPS-D-ME-031 Baffle for Column and Drum
 - IPS-D-ME-042 Hinge & Davit Details Manholes
 - IPS-D-ME-100 Nameplate for Pressure Vessels
 - IPS-D-ME-101 Nameplate & Name Plate Holder for Heat Exchanger
 - IPS-D-ME-104 Saddle Details for Horizontal Vessels
 - IPS-D-ME-200 Typical Details Vessels Ladders & Platforms

3.2 INTERNATIONAL CODES AND STANDARDS

- ASME American Society of Mechanical Engineers
 - Sec .VIII Rules for Construction of Pressure Vessels-Design
 - B 31.3 Chemical Plant and Petroleum Refinery Piping
 - B 31.8 Gas Transportation & Distribution Piping Systems
 - B 31.8 Gas Transportation & Distribution Piping Systems

 NISOC	نگهداشت و افزایش تولید میدان نفتی بینک سطح الارض و ابنیه تحت الارض عمومی و مشترک								
شماره پیمان: 053 – 073 – 9184	Standard Detail Drawing for Pressure Vessels and Heat Exchangers							شماره صفحه : 6 از 56	
	پروژه	بسته کاری	صادرکننده	تسهیلات	رشته	نوع مدرک	سریال		نسخه
	BK	GNRAL	PEDCO	000	ME	DW	0001		D02

- B 16.5 Pipe Flanges and Flanged Fittings NPS 1/2 Through NPS 24
- B 16.9 Steel Butt Welding Fitting
- B 16.11 Forged Steel Fittings
- B 16.20 Metallic Gaskets for Pipe Flanges – Ring Joint Gaskets, Spiral Wound and Jacketed
- B 16.21 Non- Metallic Gasket for Pipe Flanges
- B 16.47 Large Diameter Steel Flanges NPS 26 Through NPS 60
- B 1.20.1 Pipe Threads, General Purpose
- API 5L Specification for Line Pipes
- AISC Manual of Steel Construction


3.3 THE PROJECT DOCUMENTS

- BK-GNRAL-PEDCO-000-ME-SP-0001 Specification for Pressure Vessels
- BK-GNRAL-PEDCO-000-PI-SP-0001 Specification for Insulation
- BK-GNRAL-PEDCO-000-PI-SP-0004 Specification for Metallic Pipes
- BK-GNRAL-PEDCO-000-PI-SP-0005 Specification for Fittings, Flanges, Gaskets and Bolts
- BK-GNRAL-PEDCO-000-PI-SP-0006 Specification for Painting



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۷ از ۵۶

4.0 STANDARD DRAWINGS

4.1 LIFTING LUG TO LIFT VERTICAL VESSEL UP TO 60 TONES

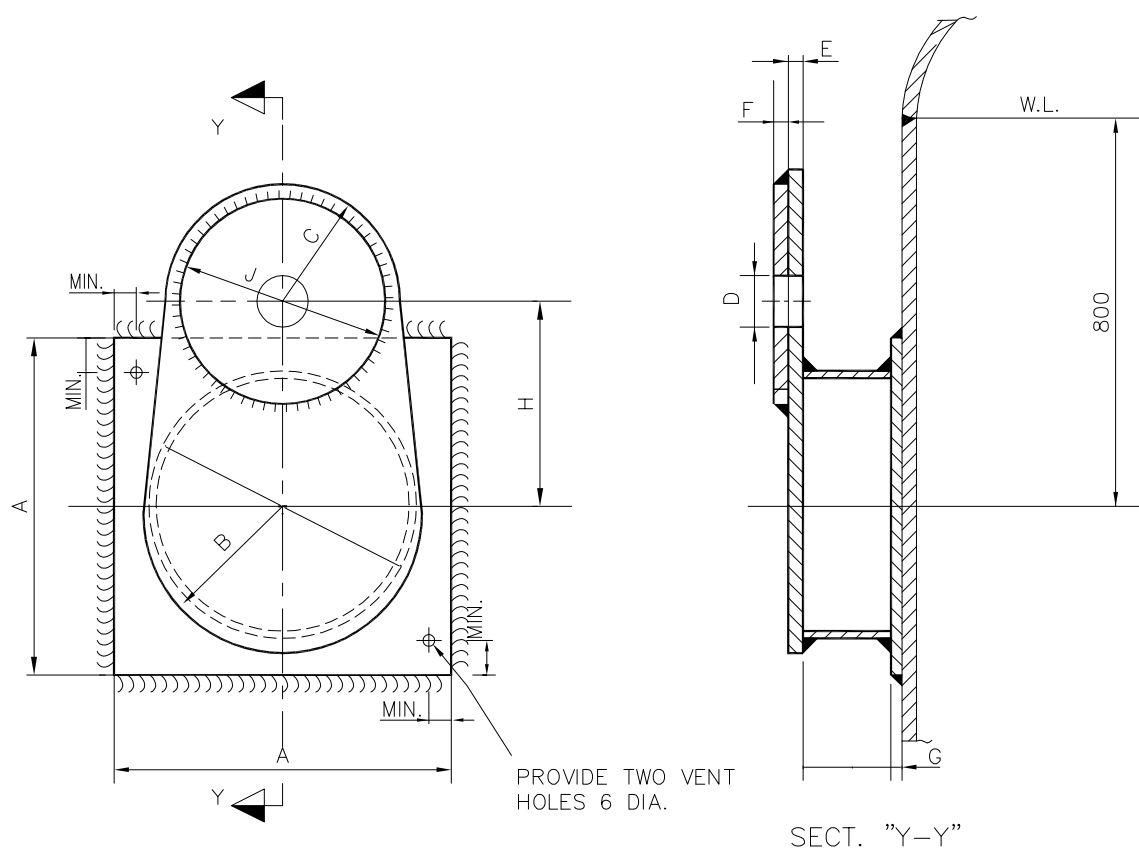


(SEE NOTE 8) LIFTING LUG LIFTING CAPACITY	PIPE			PLATES								
	DN	THK.MIN.	L	A	B	C	D	E	F	G	H	J
≤ 5	150	7.11	60	*	100	55	27	8	—	*	130	—
$> 5 \leq 10$	200	8.18	85	*	125	85	38	10	—	*	170	—
$> 10 \leq 20$	200	8.18	85	*	125	100	44	10	9	*	180	180
$> 20 \leq 25$	250	9.27	100	*	150	120	54	12	9	*	210	220
$> 25 \leq 30$	300	8.38	110	*	175	160	60	12	9	*	250	300





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۸ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

NOTES:


1. All dimensions are in millimeters unless otherwise indicated.
2. In case of conflict between this standard and the vessel drawing the latter shall govern.
3. For positioning of lifting lug see equipment drawing.
4. Welding size to be 0.7 of the thickness.
5. Lifting lug materials-plates as per vessel material or equivalent, when carbon steel vessel, the minimum required is ASTM-A 516, GR. 70.
6. Pipe materials, A 106, GR. B or equivalent.
7. The plate welded to shell for alloy steel equipment shall be same material of side to which it is welded.
8. Two lifting lugs are required.
9. A and g are width and thickness of the reinforcing plate, which are not mentioned in this table.





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۹ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

4.2 LIFTING LUG TO LIFT VERTICAL VESSEL UP TO 200 TONES

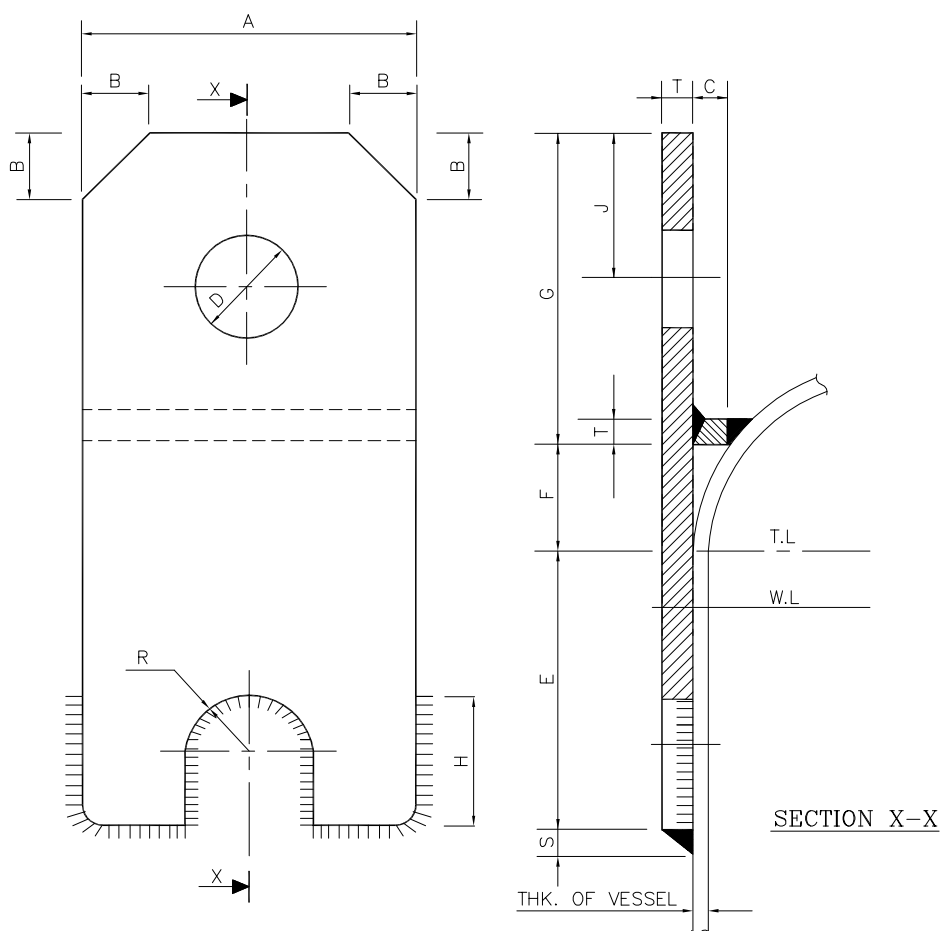


MAX. WEIGHT OF VESSEL (TON)	A	B	C	D	E	F	G	H	J	K	R	S	T
10	180	25	25	65	160	SEE NOTE 2	160	80	90	40	40	10	12
25	230	40	40	75	230		230	130	90	40	40	16	25
50	300	50	50	75	280		300	150	115	50	50	22	40
100	400	70	70	100	360		400	200	150	75	75	32	50
150	500	90	80	130	410		500	250	180	90	90	40	70
200	600	100	100	150	490		600	300	230	100	100	45	80





نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۱۰ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

NOTES:


1. All dimensions are in millimeters unless otherwise specified.
2. Dimension "F" to be determined by the shape of head in conjunction with dimension "C".
3. Fillet weld size "S" shall not exceed shell thickness.
4. Material shall be ASTM-A516 Gr. 70 or equivalent for carbon steel vessels.
5. Lifting lug material for alloy steel vessel shall be the same as material of the vessel.
6. Two lifting lugs shall be considered for each vessel.
7. In case of conflict between vessel drawing and this drawing, vessel drawing shall govern.





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۱۱ از ۵۶

4.3 LIFTING LUG TO LIFT HORIZONTAL VESSEL

Eyelets are the preferred lug type and shall be used together with shackles acc. to DIN 82101 and 82016 or any equivalent standard.

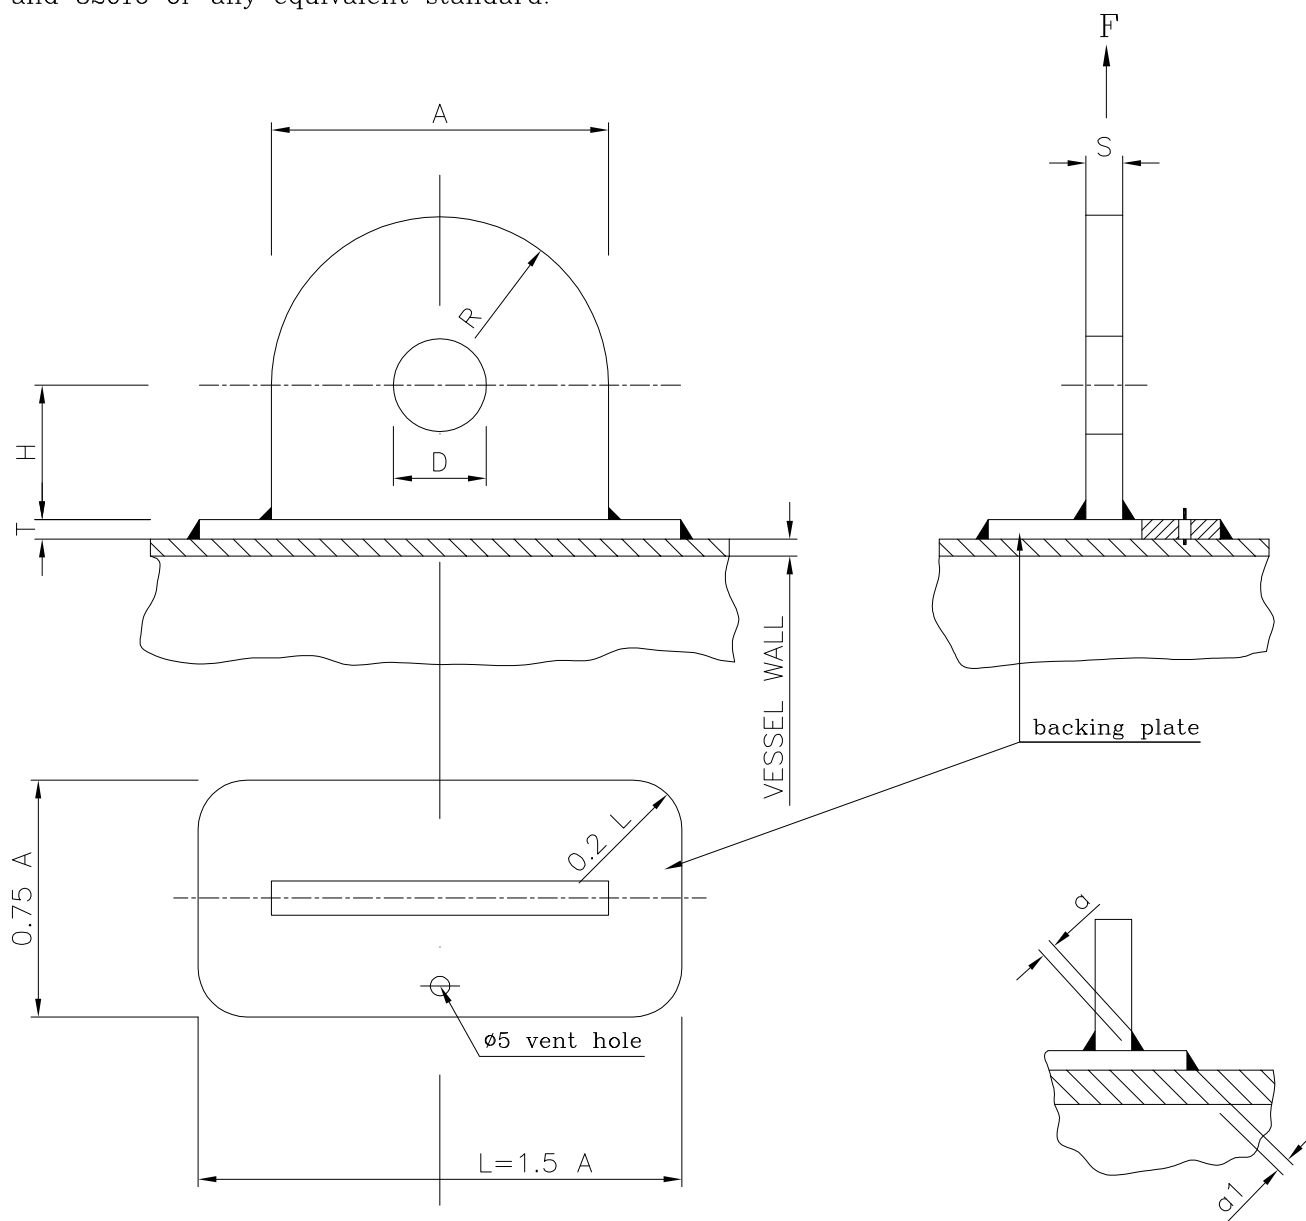

Dimension see table 1.


Allowable force see table 2.

$a = 0.7 \times T$
 $a1 = 0.7 \times \text{vessel wall}$
(max. $a1 = a$)



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger





شماره صفحه: ۱۲ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

Lug size	Shackle size		A	H*)	R	S	T	D
	DIN 82016	DIN 82101	mm	mm	mm	mm	mm	mm
A1, B1	-	5	110	55	55	10	8	38
A2, B2	-	5	142	60	71	15	8	38
A3, B3	10	10	210	75	105	15	10	50
A4, B4	16	16	260	95	130	20	14	62
A5, B5	25	25	310	115	155	25	16	74

*) Dimension H min. Is determined to fit shackles size due to curved or inclined surface of vessel. In case dimension H has to be increased stress calculation shall be performed so as to check lugs and relevant welding seams.

Table 2: Eyelets, Allowable Forces


Allowable force F for single lug		Angle of inclination B **) 0-60°	A1,B1 A2,B2 A3,B3 A4,B4 A5,B5				
			Allowable force F in kN				
			25	50	100	160	250
Total allowable force Ft for two lugs and traverse		0°	Total Allowable force Ft in kN				
			50	100	200	320	500
Total allowable force Ft for two lugs		0-15°	48	96	193	309	482
		15-30°	43	86	173	277	433
		30-45°	35	70	141	226	353
		45-60°	25	50	100	160	250
Total allowable force Ft for three lugs		0-15°	72	144	289	463	724
		15-30°	64	129	259	415	649
		30-45°	53	106	212	339	530
		45-60°	37	75	150	240	375

**) Angle of inclination B as defined above shall never be greater than 60°.



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۱۳ از ۵۶

4.4 VERTICAL VESSEL SUPPORT SKIRT OPENING DETAILS

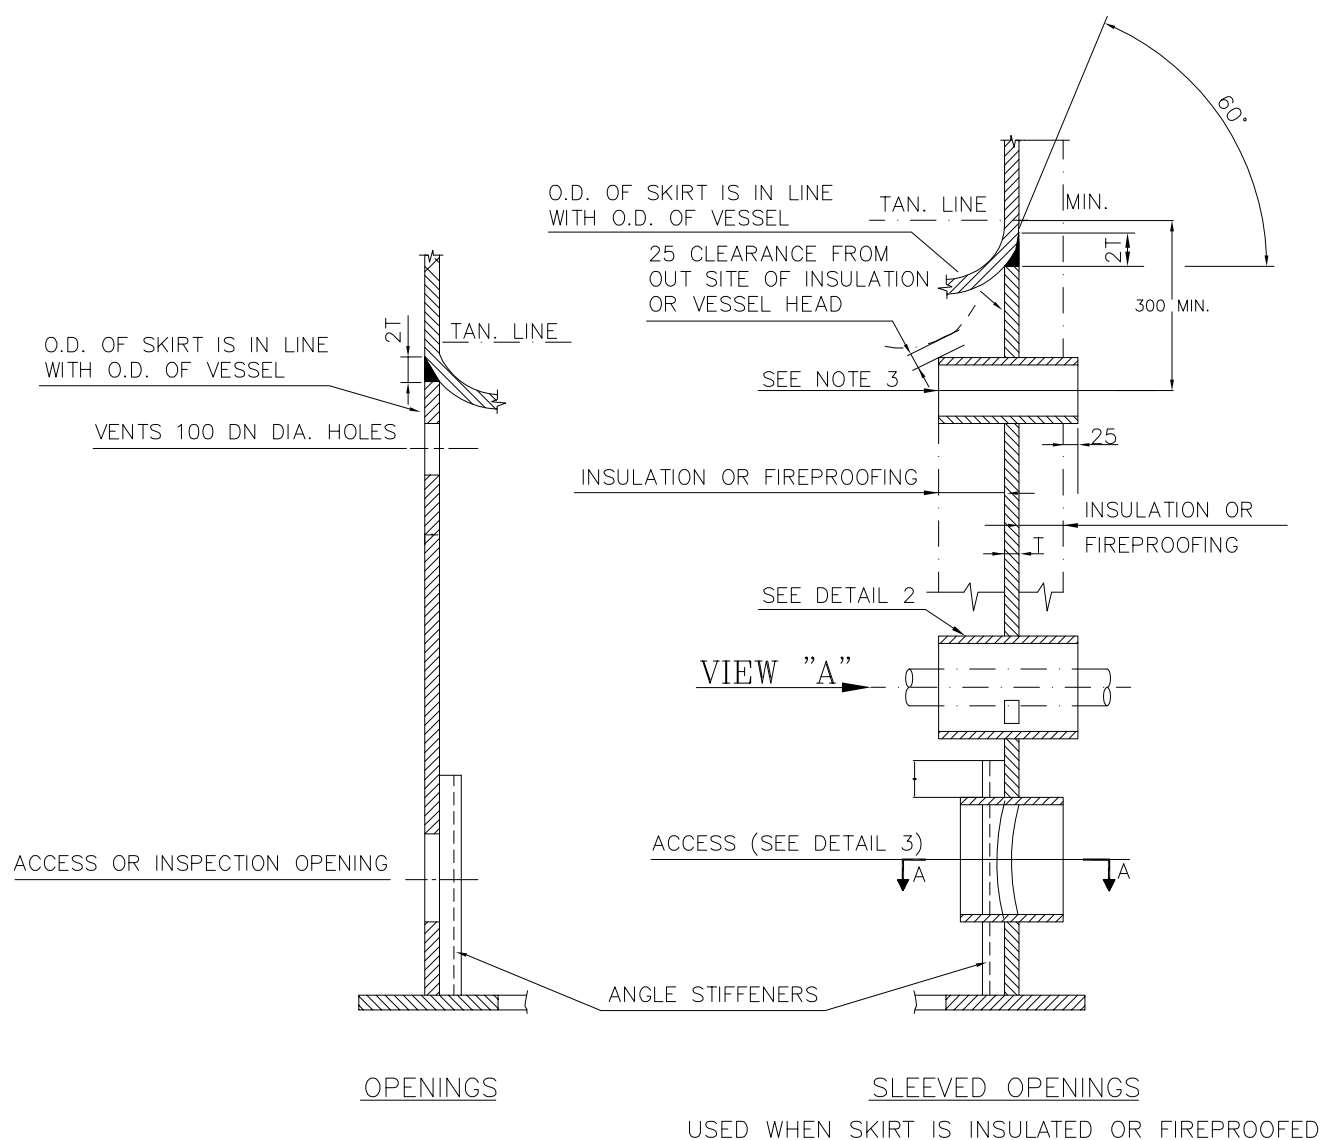



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:


053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger


شماره صفحه: ۱۴ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK


L 70x70x11 STIFFENER
EACH SIDE OF ACCESS OPENING

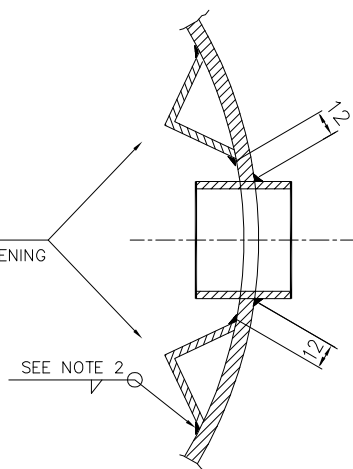

TYPICAL ANGLE STIFFENERS
SECTION A-A


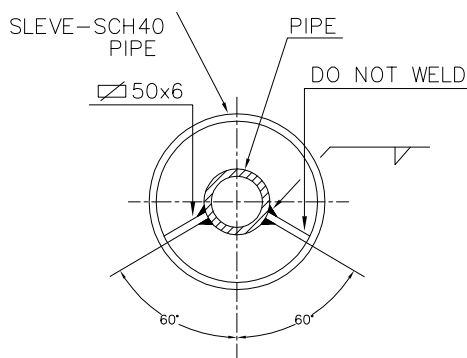


VIEW "A"

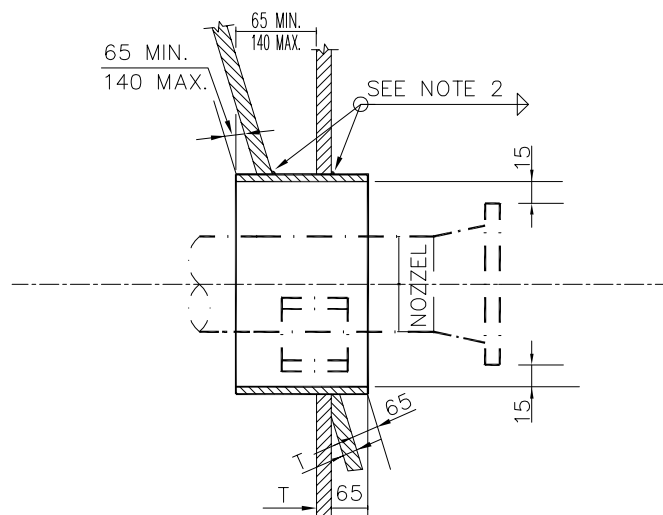


TYP. PIPE OPENING

DETAIL 2

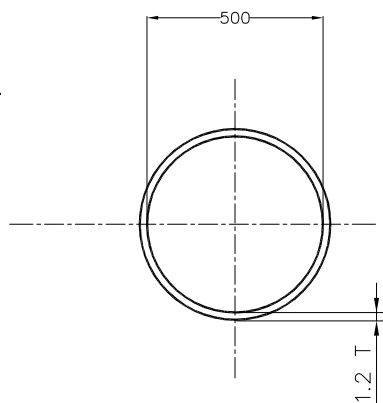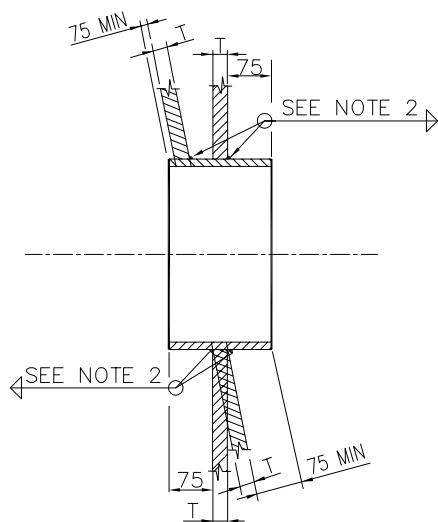

TYPE "A"



TYPE "B"


DETAIL 3
ACCESS AND INSPECTION OPENING





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۱۵ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

SKIRT VENT REQUIREMENTS

SKIRT O.D.	No. OF VENTS
915 AND SMALLER	2
916 THRU 1830	4
1831 THRU 2745	6
2746 THRU 3660	8
3661 THRU 4575	10
4576 THRU 5490	12

SKIRT ACCESS OR INSPECTION OPENING REQ.

SKIRT O.D.	No.	TYPE
≤ 850	1	TYPE "B"
851 THRU 950	1	TYPE "A"
951 THRU 1500	1	TYPE "A"
>1500	2	TYPE "A"

NOTES:


1. ALL DIMENSIONS ARE IN MILLIMETERS AND PIPE SIZES ARE DN.
2. ALL WELDINGS SHALL BE OF CONTINUOUS FILLET TYPE WITH DIMENSIONS THE THINNER OF THE WELDED PARTS, UNLESS OTHERWISE SPECIFIED.
3. 3-VENTS SHALL BE 100 DN, 6.02 THK. AND SHALL BE EQUALLY SPACED ABOUT THE CIRCUMFERENCE.





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:


053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۱۶ از ۵۶


4.5 SUPPORT LEG AND BASE PLATE DETAILS

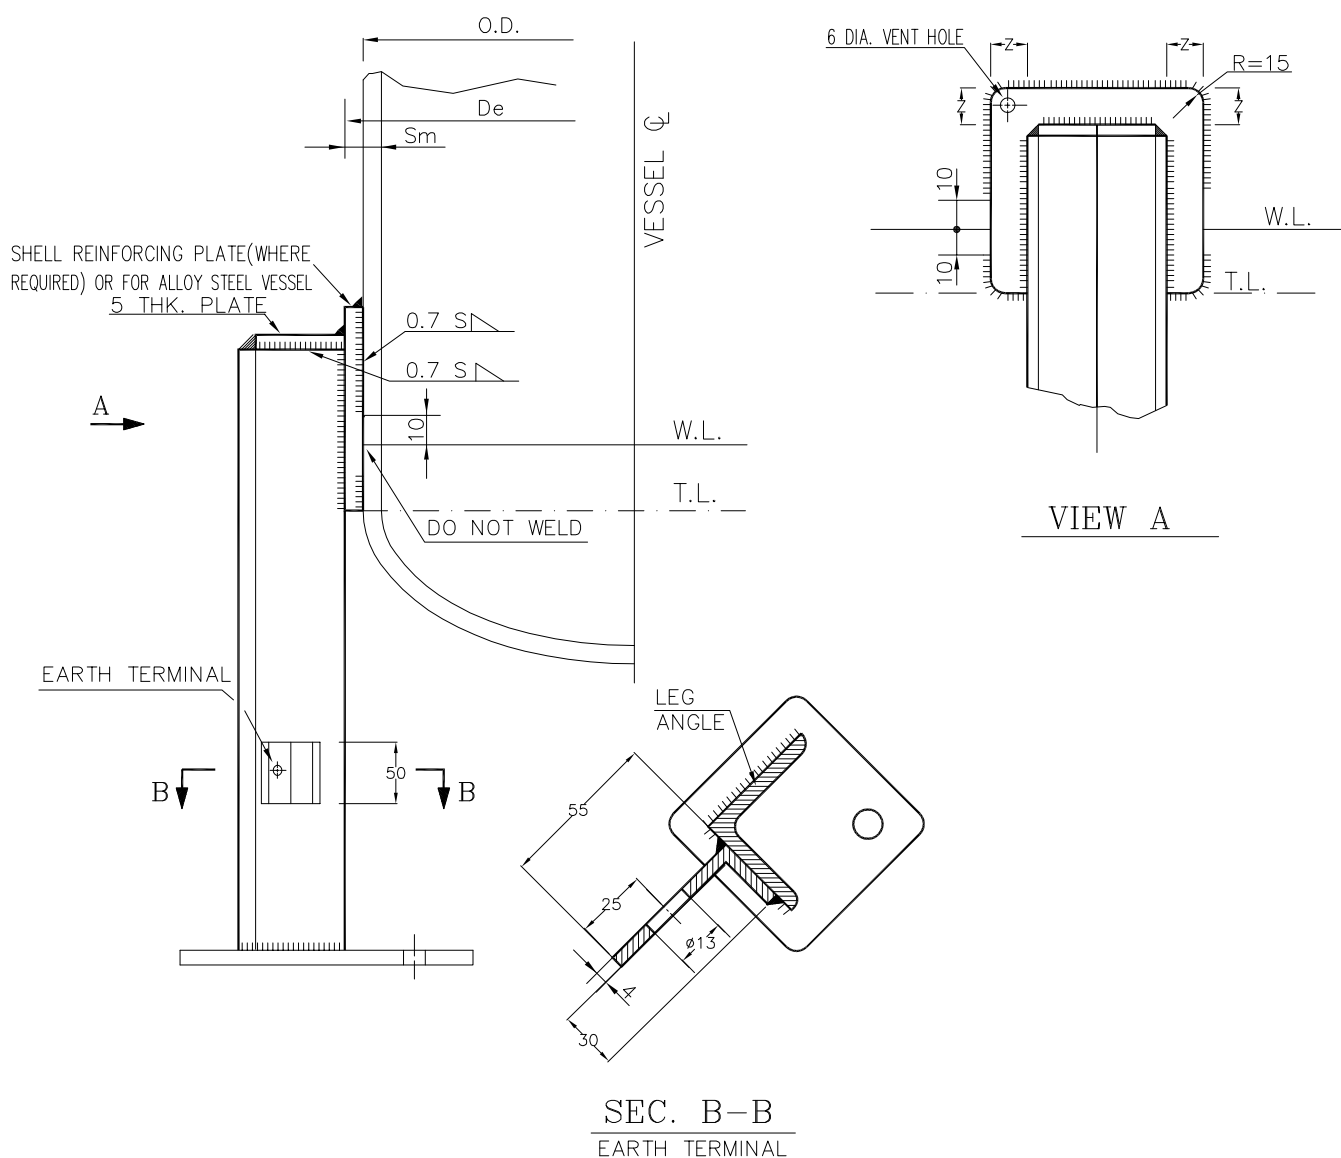



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک





شماره پیمان:

053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۱۷ از ۵۶

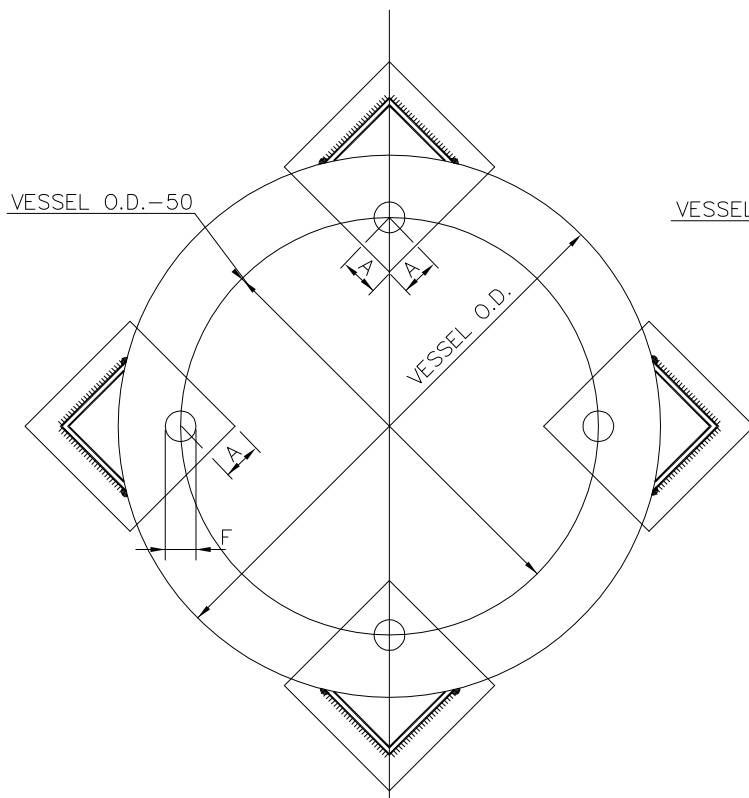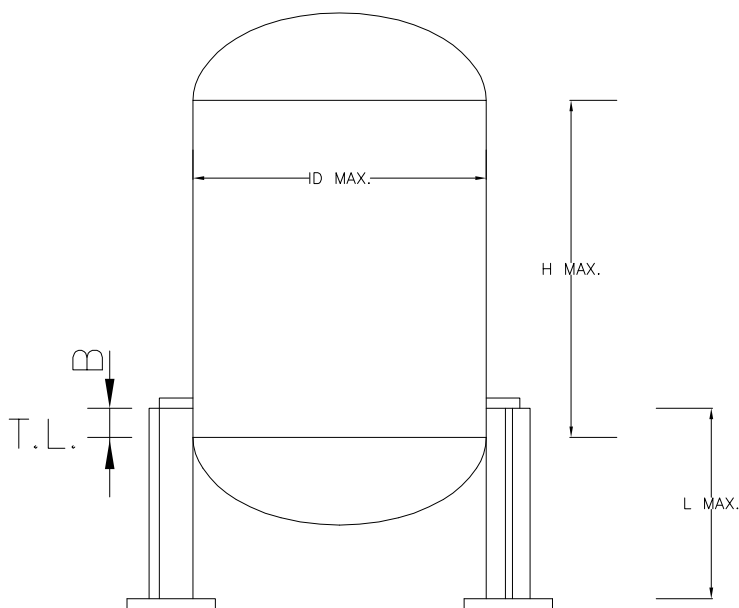

LEG FROM ANGLE

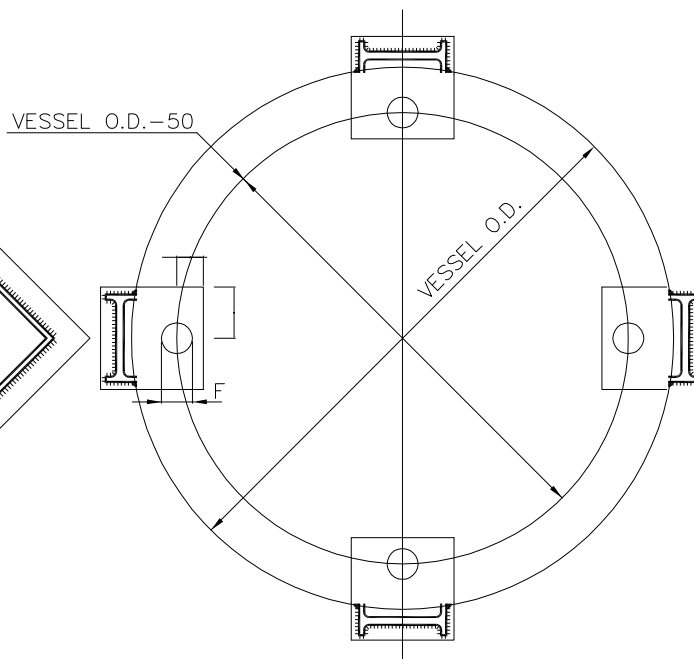


LEG FROM I-BEAM





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۱۸ از ۵۶


نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	یسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

H MAX (mm)	ID MAX (mm)	TOTAL MAX WEIGHT (HYDRO TEST+INT.) TON.	LEG SIZE (mm)	BASE PLATE SIZE mm
1000	UP TO 1300	3.00	L 75 x 75 x 13	140 x 140 x 14
	1300 TO 1600	5.00	L 100 x 100 x 13	205 x 205 x 14
	1600 TO 2000	8.50	L 100 x 100 x 16	200 x 200 x 15
2000	UP TO 1300	4.7	L 100 x 100 x 13	205 x 205 x 14
	1300 TO 1600	7.3	L 100 x 100 x 16	200 x 200 x 15
	1600 TO 2000	12.0	L 130 x 130 x 13	230 x 230 x 14
3000	UP TO 1300	6.3	L 100 x 100 x 13	205 x 205 x 14
	1300 TO 1600	9.0	L 100 x 100 x 16	200 x 200 x 15
	1600 TO 2000	15.7	L 130 x 130 x 16	230 x 230 x 16
4000	UP TO 1300	7.5	L 100 x 100 x 13	205 x 205 x 14
	1300 TO 1600	12.0	L 130 x 130 x 13	230 x 230 x 14
	1600 TO 2000	19.3	L 130 x 130 x 20	230 x 230 x 20
5000	UP TO 1300	9.5	L 100 x 100 x 16	200 x 200 x 15
	1300 TO 1600	14.4	L 130 x 130 x 16	230 x 230 x 16
	1600 TO 2000	21.0	L 150 x 150 x 13	300 x 300 x 15
6000	UP TO 1300	11.0	L 130 x 130 x 11	255 x 255 x 15
	1300 TO 1600	16.3	L 130 x 130 x 16	230 x 230 x 16
	1600 TO 2000	25.0	IPE 270	
7000	UP TO 1300	12.7	L 130 x 130 x 13	230 x 230 x 14
	1300 TO 1600	19.0	L 130 x 130 x 20	230 x 230 x 20
	1600 TO 2000	30.0	IPE 300	
8000	UP TO 1300	14.3	L 130 x 130 x 16	230 x 230 x 14
	1300 TO 1600	21.4	L 150 x 150 x 13	300 x 300 x 16
9000	UP TO 1300	15.9	L 130 x 130 x 16	230 x 230 x 16
	1300 TO 1600	23.8	IPE 270	





نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۱۹ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK


NOTES:

1. All dimensions are in mm, otherwise as specified.
2. Vessel drawing specifies requirement of reinforcing pad for carbon steel vessels. For alloy steel vessels reinforcing pad is required. pad thickness must be indicated on the vessel drawing. z dimension shall be sized by vendor.
3. Where required reinforcing material should be the same as vessel material.
4. Provide two earth terminals at 180° for equipment with four support legs MAT. 18-8 S.S.
5. S=LEG (Angle) Thickness
6. For intermediate values of the table use larger figures.
7. MAX. Length of leg (L) is 2.5 meters.
8. All corners of base plate shall be rounded off to A 10 mm radius.
9. No wind or earth quake loadings have been considered.
10. Temperature effect has not been considered.
11. Compression strength of the concrete is 3000 PSI.
12. Table can be used based on the vessel weight.
13. Support legs shall have the same p-number as the vessel to which they are welded. For CS vessels supp. Material is ASTM. A-36 for alloy vessels support material is the same as vessel material.
14. The welds shall be carried out and inspected at shop as per ASME code.





نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۲۰ از ۵۶



نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

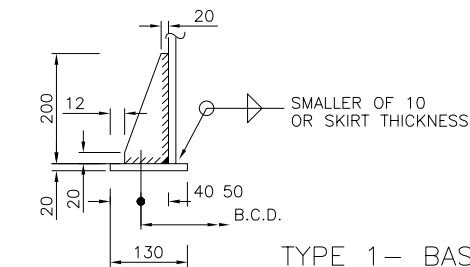

TYPE 1- BASE LUG FOR M24 DIA. BOLT

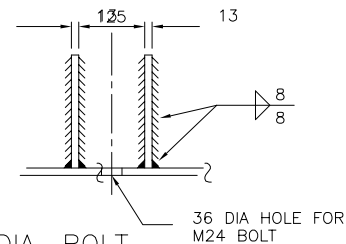

TYPE 2- BASE LUG FOR BOLTS OVER M24 DIA.

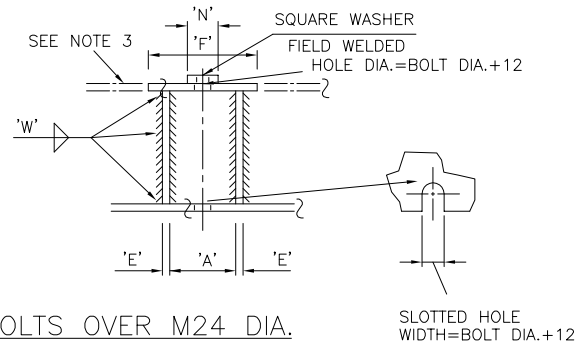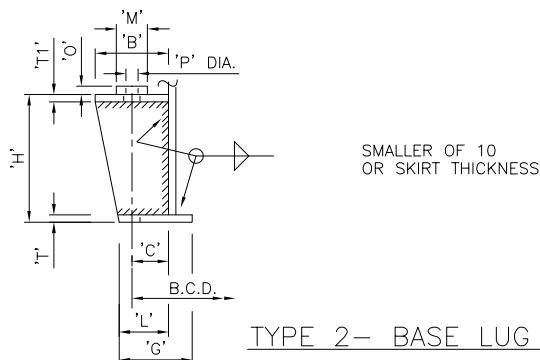

MINIMUM NUMBER OF ANCHOR BOLTS (SEE NOTE 1)				
SKIRT ID AT BASE RING	OVERALL HEIGHT OF VESSEL (METERS)			
	UP TO 10m	10m TO 30m	30m TO 50m	OVER 50m
UP TO 2300	4	8	12	16
2300 & OVER	8	8	12	16


BOLT SIZE	EFFECTIVE STRESS AREA sqmm see note 6	DIMENSIONS														
		A	B	C	E	F	G	H	L	T	T1	W	M	N	O	P
M24	235.6	80	100	55	10	140	125	250	70	22	16	10	70	110	12	26
M30	442.1	100	115	60	10	150	150	300	75	28	19	10	75	120	14	33
M36	672.1	100	130	65	10	150	165	300	85	31	21	10	85	120	14	39
M42	949.1	100	140	70	13	150	180	300	95	33	24	10	100	140	16	45
M48	1273.2	115	150	75	13	180	190	360	100	35	27	10	110	150	16	52
M56	1797.4	130	165	85	16	200	220	380	115	37	32	13	115	170	19	62
M64	2411.7	130	180	90	16	200	240	410	125	43	37	13	125	180	19	70
M72	3154.0	145	210	105	20	225	280	440	145	52	43	16	140	190	22	78
M80	4000.0	160	240	120	22	250	320	510	160	59	49	16	145	220	25	86

GENERAL NOTES:

- Actual vessel requirements decided by calculation. the number of anchor bolts shall be a multiple of four.
- If necessary, allowance to be made for expansion of vessel.
- Continuous top ring may be substituted in all cases, but must be provided if
 $\Pi \times B.C.D. < 250$ For bolts M30 to M42 DIA. INCL.
 NO. OF LUGS < 300 For bolts M48 to M80 DIA. INCL.
- Minimum bolt spacing in all cases must not be less than six x bolt diameter.
- These bolt sizes should only be specified if no alternative is possible.
- * Allows for 3mm corrosion on core diameter.
- Bolt holes to straddle north & south C'S, unless stated otherwise.
- All specified thicknesses and basing dimensions shall be confirmed by vendor.
- All contacting edges of plates shall be welded with continuous fillet weld.



نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۲۱ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

4.7 SADDLE DETAILS FOR HORIZONTAL VESSELS

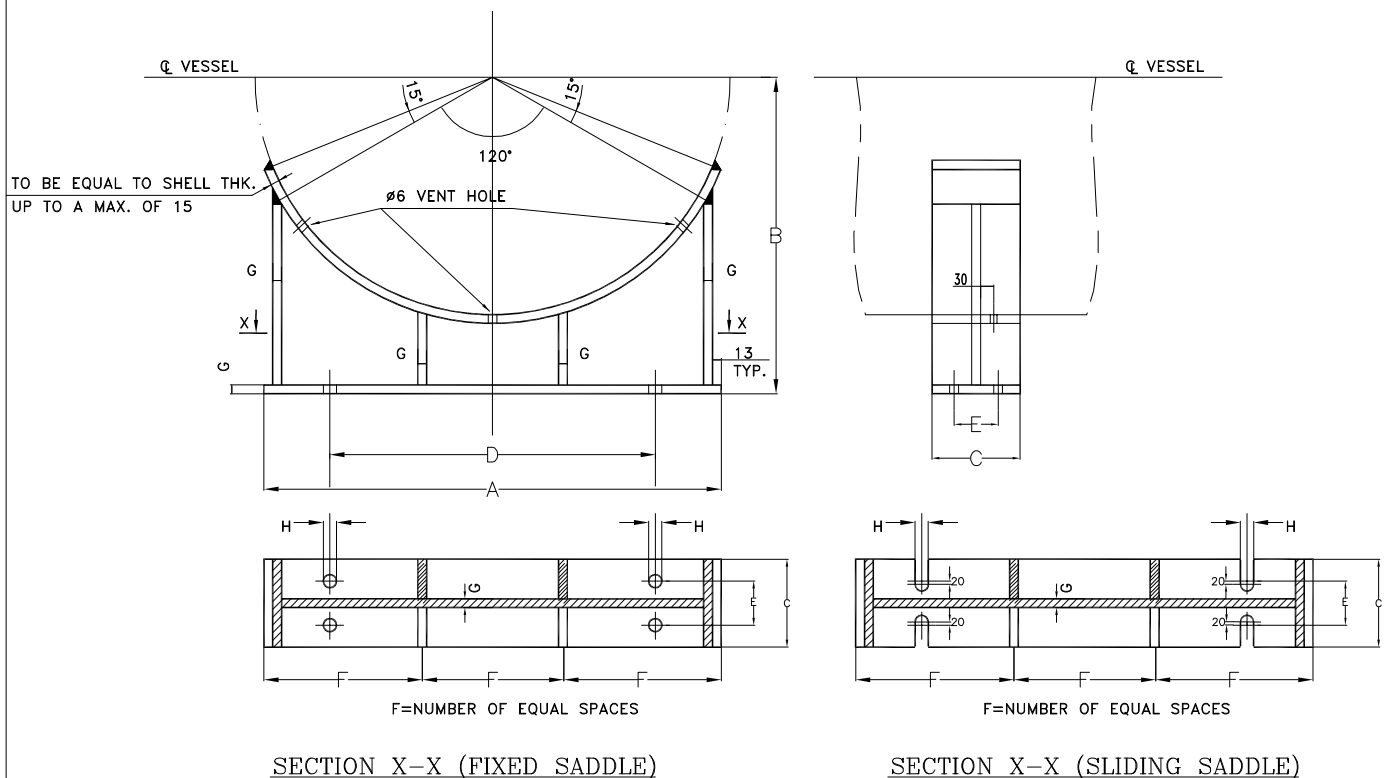

VESSEL O.D.	A	B	C	D	E	F No. OF EQ. SPACES	G	H	BOLTS DIA. (NOTE 5)	MAX. LOAD PER SADDLE (KG.)
600	600	475		350						
750	750	550		450						
900	900	625		600		2	10	26	M20	2500
1050	1050	700		750						5000
1200	1200	775		900						9000
1350	1350	850		1000		3	13	30	M24	20000
1500	1500	925		1150						
1650	1650	1000		1250						
1800	1800	1075		1400						45000
1950	1950	1150		1550						
2100	2100	1225		1650		4	16	36	M30	65000
2250	2250	1300		1800						
2400	2400	1375		1900						100000

DIMENSIONS OF SADDLE

NOTES:


- All dimensions are in millimeters unless otherwise specified.
- Top saddle plate material shall be the same as the shell plate.
- Fix points of saddle plates shall be continuously fillet WELDED ON both sides of the plate leg length of 0.7 plate Thk.
- If the load on one saddle is exceeding the max. saddle load, the low friction supports shall be installed under the sliding saddle.
- Bolt material shall be as per related data sheet.





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:


053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger


نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۲۲ از ۵۶

4.8 NOZZLE DETAILS

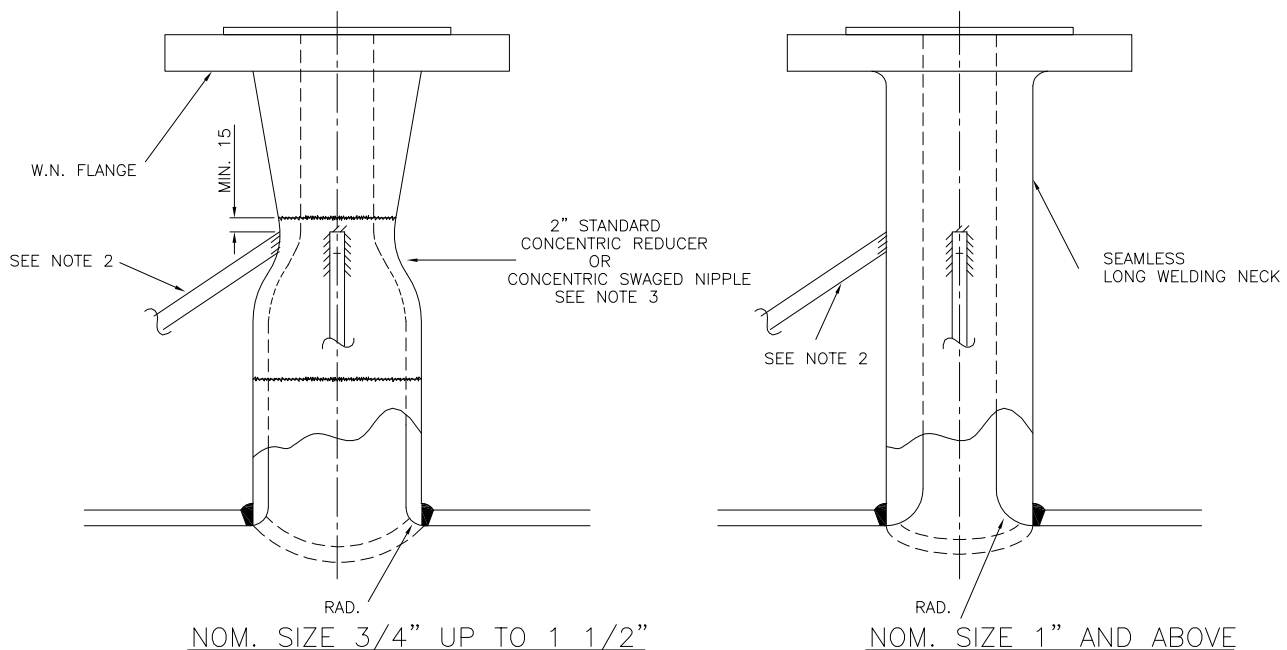

NOM. SIZE 2" AND ABOVE

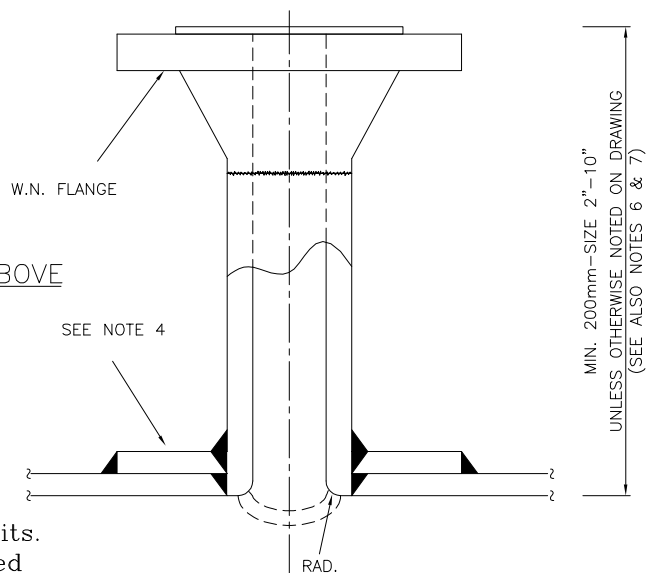


GENERAL NOTES:

- Any of the above nozzle details are acceptable within the stated size limits.
- Nozzles 2" and smaller to be provided with 2-40x6 bracing bars welded at 90° to each other.
- Reducer and pipe wall thickness according to code requirements but sch. 160 minimum.
- Reinforcement to be provided as applicable to contract standards.
- Flanges other than W.N. can only be used if allowed by contract standards and approved by contractor/consultant.
- For vessels with insulation thicker than 50mm, difference above 50mm shall be added to this dimension.
- See individual vessel data sheet for the type of flange and reinforcement of nozzles and their projections.



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:


053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۲۳ از ۵۶

4.9 TANGENTIAL NOZZLE WELD DETAILS

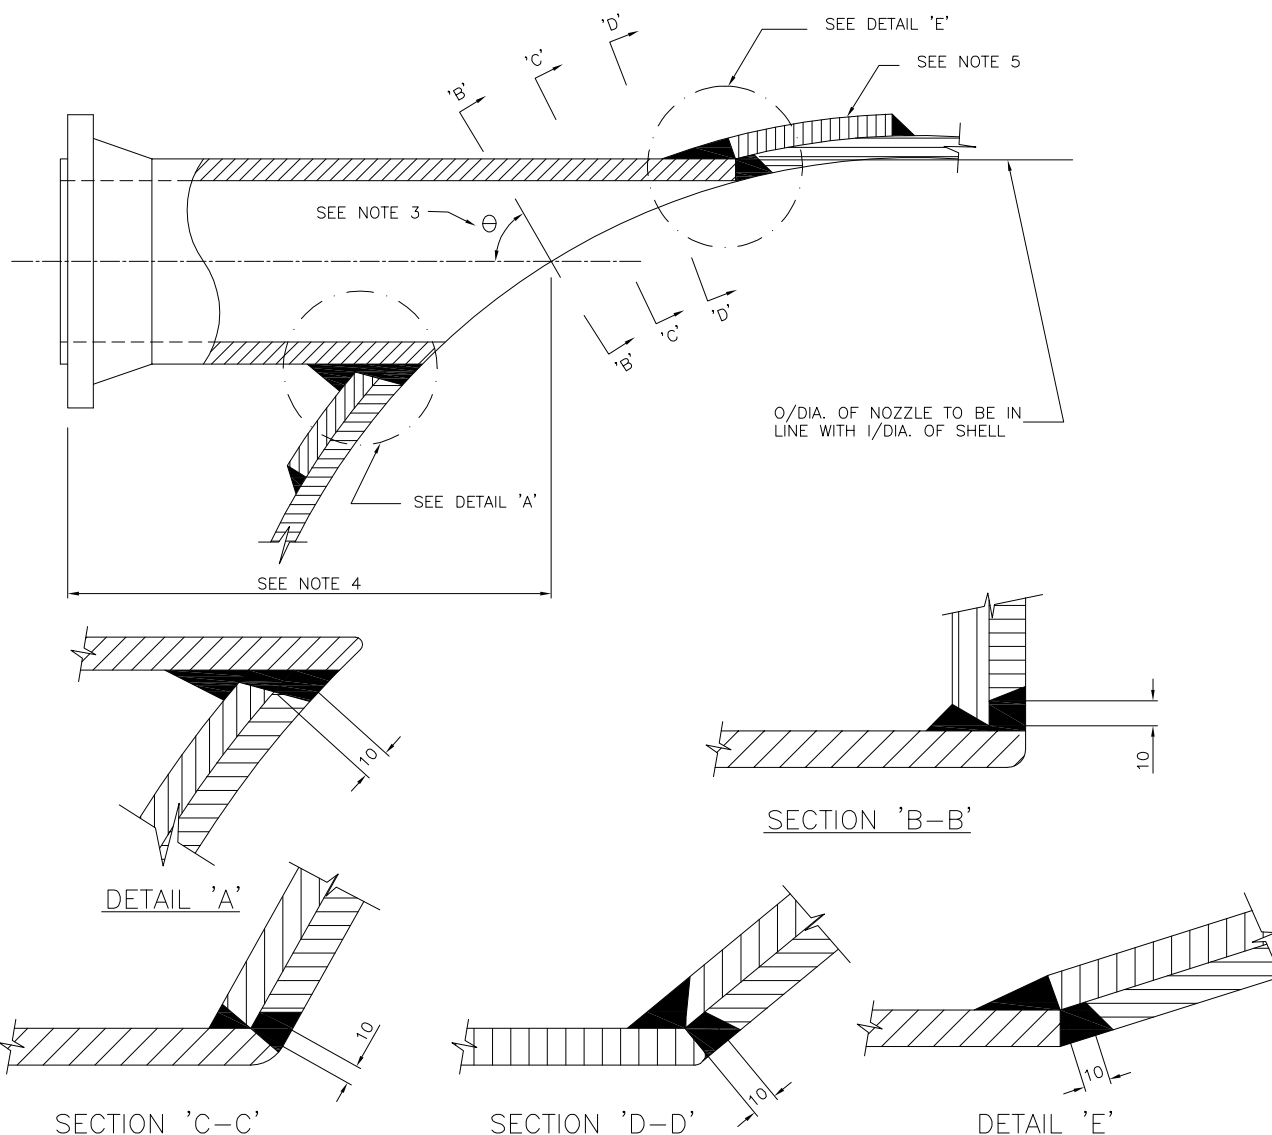


GENERAL NOTES :

1. Shell weld preparation varies gradually from detail 'A' through 'B-B', 'C-C', 'D-D' TO detail 'E'.
2. Reinforcing plate to nozzle neck weld varies but must equal a full penetration weld.
3. Tangential nozzles to comply with code requirements. (Note: when using bs 5500 is not to exceed 50°, unless a proof test is carried out or a proven design is submitted for contractor/consultant review).
4. If stand out from vessel shell exceeds 300, provide 40x6 bracing bars for all nozzles up to 3" DIA.
5. Reinforcing pad to be provided giving at least 100% area replacement both circumferentially and axially.



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:



053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger



نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۲۴ از ۵۶

4.10 HINGE AND DAVIT DETAILS FOR MANHOLES

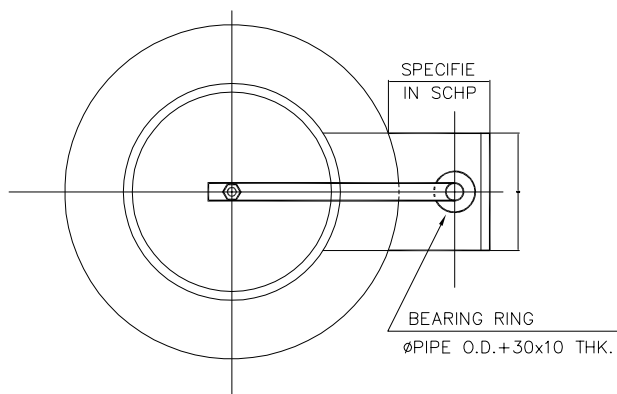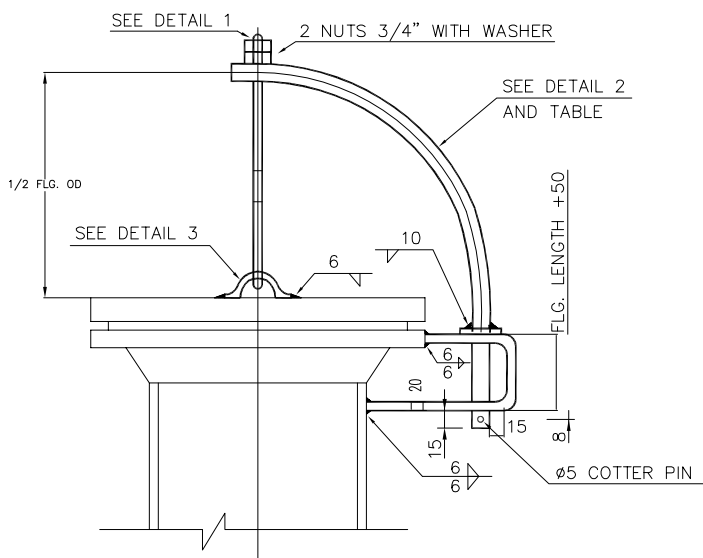

VERTICAL MANHOLE

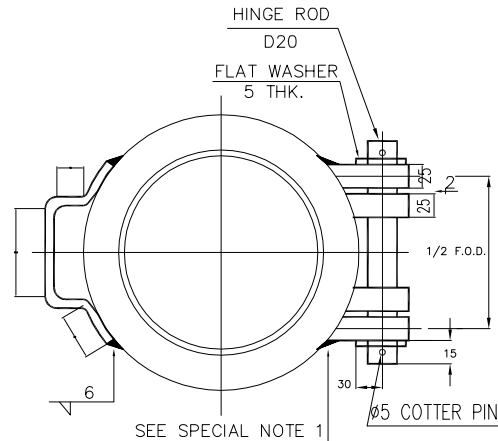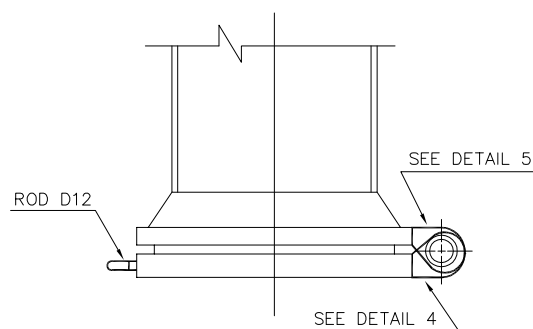

MANHOLE COVER HINGE
USE FOR BOTTOM ENTRY


FLANGE RATING		150#(20 PN)					300#(50 PN)					600#(100 PN)					900#(150 PN)				
FLANGE SIZE		14"	16"	18"	20"	24"	14"	16"	18"	20"	24"	14"	16"	18"	20"	24"	14"	16"	18"	20"	24"
		350	400	450	500	600	350	400	450	500	600	350	400	450	500	600	350	400	450	500	600
DAVIT SIZE (PIPE)	IN	1 1/2	1 1/2	1 1/2	2	2	1 1/2	1 1/2	2	3	3	2 1/2	2 1/2	2 1/2	3	3	2 1/2	3	3	3	4
	PN	40	40	40	50	50	40	40	50	50	50	65	65	65	80	80	65	80	80	80	80
	SCH.	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80
	THK.	5.08	5.08	5.08	5.54	5.54	5.08	5.08	5.54	7.62	7.62	7.01	7.01	7.01	7.62	7.62	7.01	7.62	7.62	7.62	8.55





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۲۵ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

GENERAL NOTES:

1. All dimensions are in mm. , unless otherwise shown.
2. Davit assembly shall be in true vertical alignment after welding support on to nozzle neck, or flange, manhole position is indicated on vessel drawing.
3. Material:
Pin, rod & eyebolt=a36 or equivalent
Pipe=a53 gr.b or equivalent
Plate=a283 gr. c or equivalent (for alloy and s.s flanges use transition plate.)
4. See vessel drawing for hinge and davit orientation.
5. All weldings shall be made before vessel heat treatment.(if any)
6. Welding symbols procedure and tests are per a.w.s.

SPECIAL NOTES:


1. Weld to full penetration without excessive heating to avoid flange damage or distortion.
2. Fit lugs and pin so that pin is loose when cover is bolted uP.





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:

053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK


شماره صفحه: ۲۶ از ۵۶

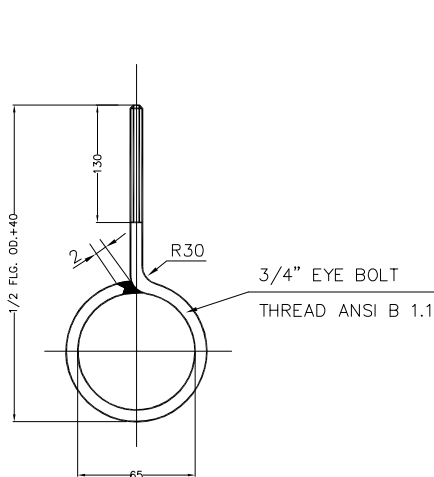


DETAIL 1
EYE BOLT

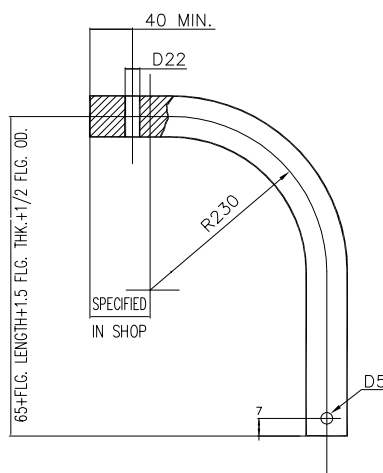


DETAIL 2
DAVIT

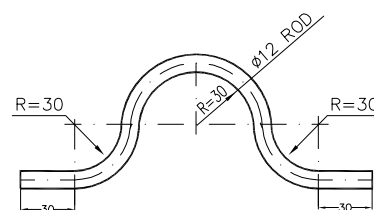

DETAIL 3
LUG (HANDLE)

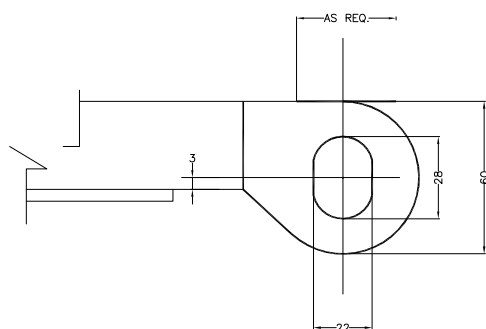

DETAIL 4
COVER HINGE

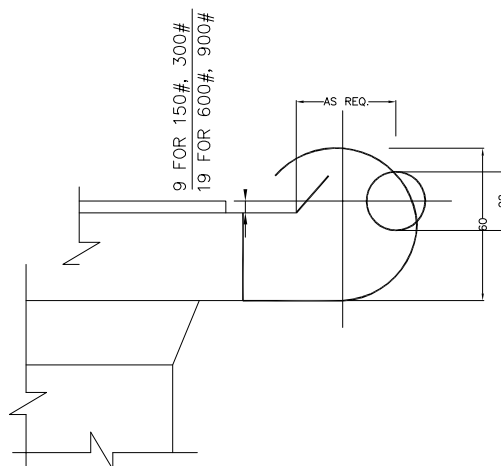

DETAIL 5
FLANGE HINGE





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:



053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK



شماره صفحه: ۲۷ از ۵۶

4.11 VORTEX BREAKERS DETAILS

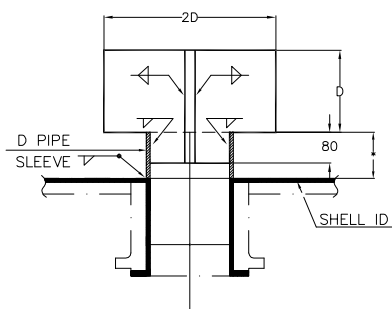



80(3") AND OVER

FOR LINED VESSELS

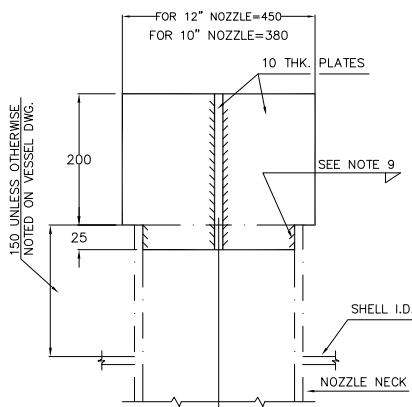

TYPE-A

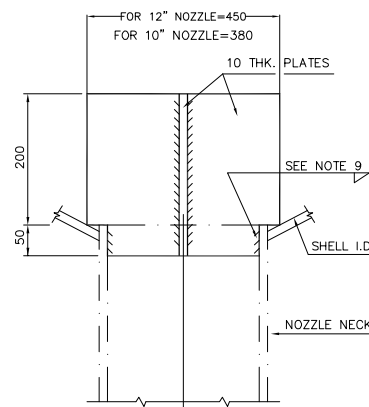

TYPE-B

80(3")AND OVER

FOR UNLINED VESSELS


NOTES:

1. All dimensions are in millimeters.
2. See vessel outline drawing for material & pipe size.
3. Vessel fabricator to furnish & install vortex breakers.
4. In case of conflict between this standard and vessel drawing the latter shall govern.
5. For stainless steel vessels, (vortex breaker) plate shall be 6mm thk., same material as Vessel.
6. Alloy or concrete lined baffle and sleeve material shall be 5 plate steel material as nozzle lining.
7. Details, dimensions and notes in project specification-vessels take precedence over those shown hereon.
8. For i.d. of the penetrating pipe in to the nozzle see vessel drawing.
* See project specification-vessels.
9. All weldings shall be of continuous fillet type with size at least THINNER OF THE WELDED parts.





نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:
053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۲۸ از ۵۶



نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

4.12 BAFFLE FOR COLUMN & DRUM

PIPE OR ROLLED PLATE



RADIUS $\approx$ BORE OF NOZZLE
FOR ROLLED PLATE



HALF OF 100 DN(4") THK. 8.56
(SCH. 80) PIPE OR 9 THK.
ROLLED PLATE


(SEE NOTE #5)

TYPE 1

HALF OF 2D PIPE(MIN. 9THK.)


OR 9THK. ROLLED PLATE

(SEE NOTE #5)




TOP AND BOTTOM OPEN

TYPE 2

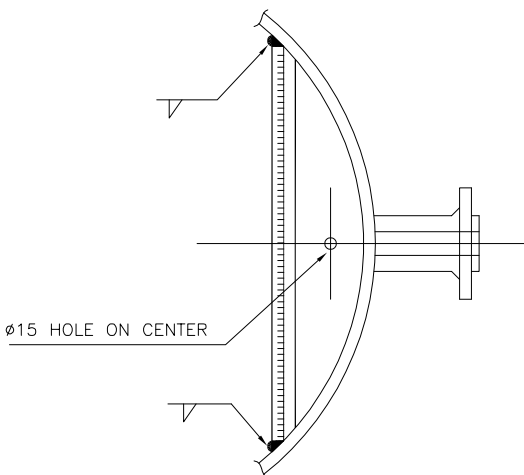


Ø15 HOLE ON CENTER

SEE PROJECT DRAWING

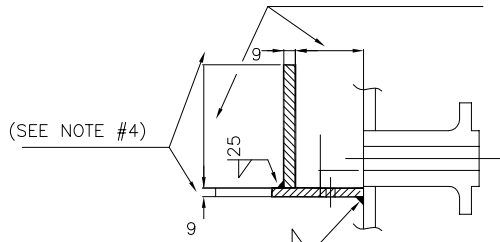


(SEE NOTE #4)

TYPE 3



3-BAR: 19x6
EQUALLY SPACED
(SEE NOTE #4)

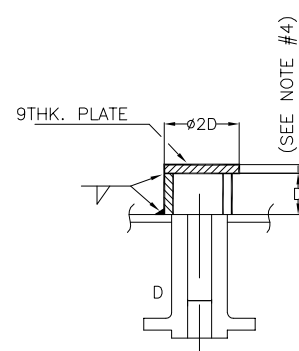

(SEE NOTE #4)


TYPE 4





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۲۹ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

NOTES:


1. All dimensions are in millimeters, unless otherwise indicated.
2. Materials of baffle plates and pipes shall be as specified on the vessel drawing.
3. Construction detail dimensions and materials in drawings or data sheet shall take precedence over those shown hereon.
4. Where corrosion allowance exceeds 3.0 mm. , plate thk. and pipes. thk. shall be increased.
5. Plate thickness to be 6 for stainless, alloy steel vessels, lining or cladded vessels.
6. Welds shall be carried out and inspected at shop as per vessel design code.
7. All weld shall be same as baffle thk.





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:
053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK


شماره صفحه: ۳۰ از ۵۶

4.13 TYPICAL DETAILS VESSEL PLATFORM AND LADDERS


4.13.1 PLATFORM DETAILS FOR VERTICAL VESSELS

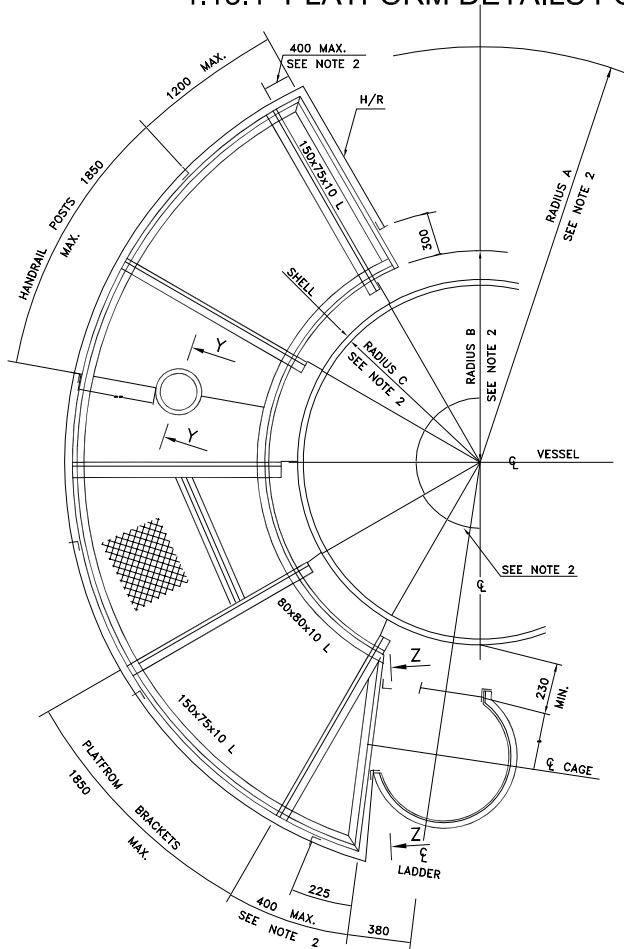


TYPICAL SIDE PLATFORM

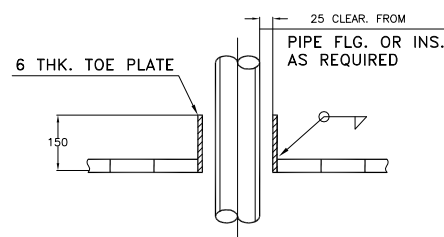

SECTION Y-Y
TYPICAL PIPE PENETRATION

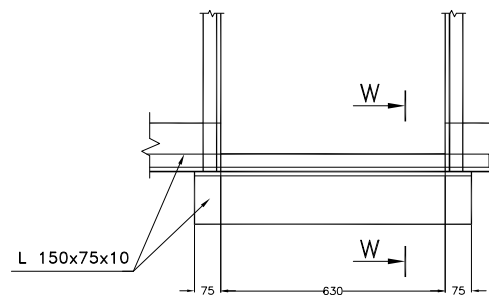

SECTION Z-Z

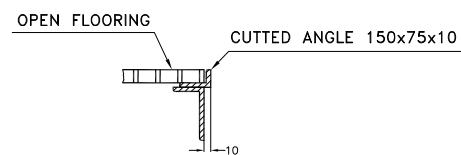


SECTION W-W





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:

053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	یسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۳۱ از ۵۶

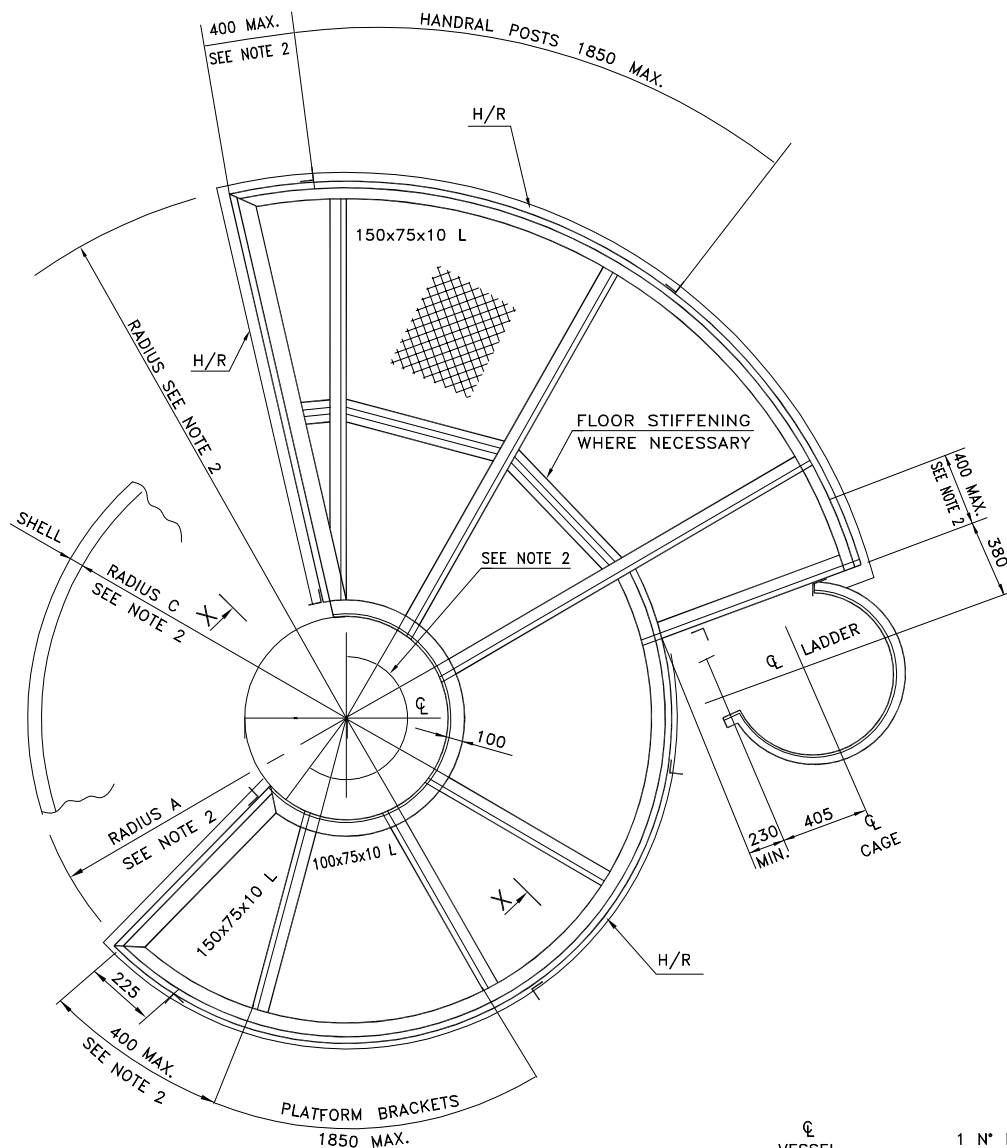

TYPICAL TOP HEAD PLATFORM

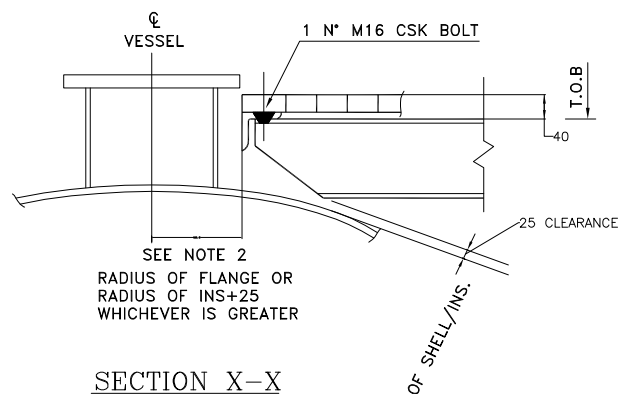


SECTION X-X





نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۳۲ از ۵۶


نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

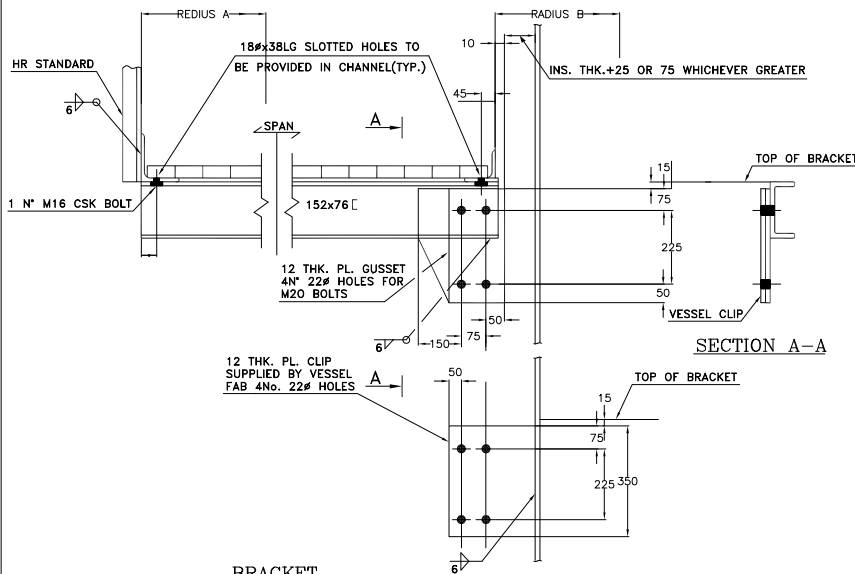

BRACKET
TYPE I

NOTE: THIS BRACKET IS DESIGNED
FOR A MAX. SPAN OF 1500

VESSEL DIA. m	MAX. ANGLE BETWEEN BRACKET				
	PLATFORM WIDTH				
	UP TO 1.25m	1.5m	1.75m	2m	2.25m
2	40°	40°	33°	27°	22°
3	34°	32°	26°	22°	18°
4	29°	26°	22°	18°	15°
5	25°	22°	18°	16°	13°
6	23°	19°	16°	14°	12°
7	20°	17°	14°	12°	11°
8	18°	15°	13°	11°	10°
9	17°	14°	12°	10°	9°
10	16°	13°	11°	9°	8°

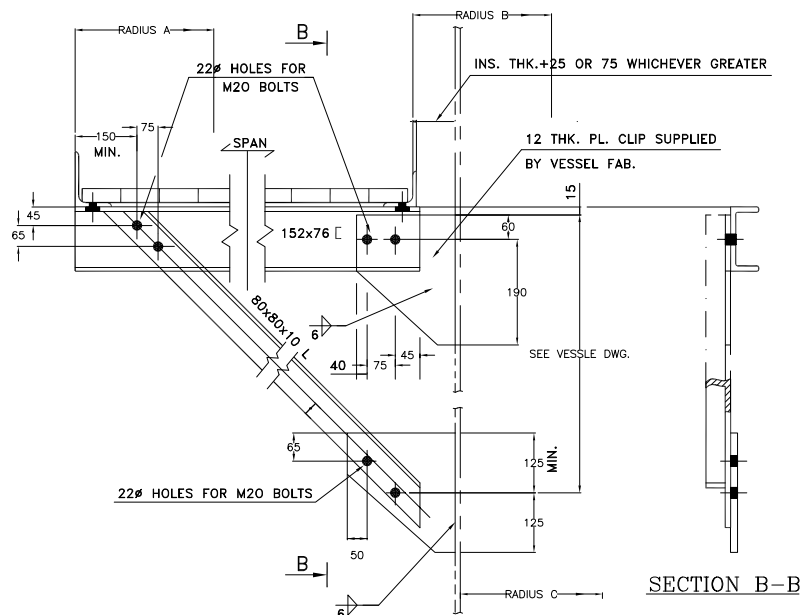

BRACKET
TYPE II

NOTES:

1. All dimensions are in millimetres.
2. See ladder & platform drawings for specific job requirements and vessel drawings.
3. All vessel clips to be supplied & installed by vessel fabricator.
4. All welds shall be 6 fillet.
5. All platform flooring shall be galvanized open steel rectangular pattern.
6. Stiffeners to be provided when platform width exceeds 1.75 m.





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:


053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger


نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۳۳ از ۵۶

4.13.2 PLATFORM DETAILS FOR HORIZONTAL VESSELS

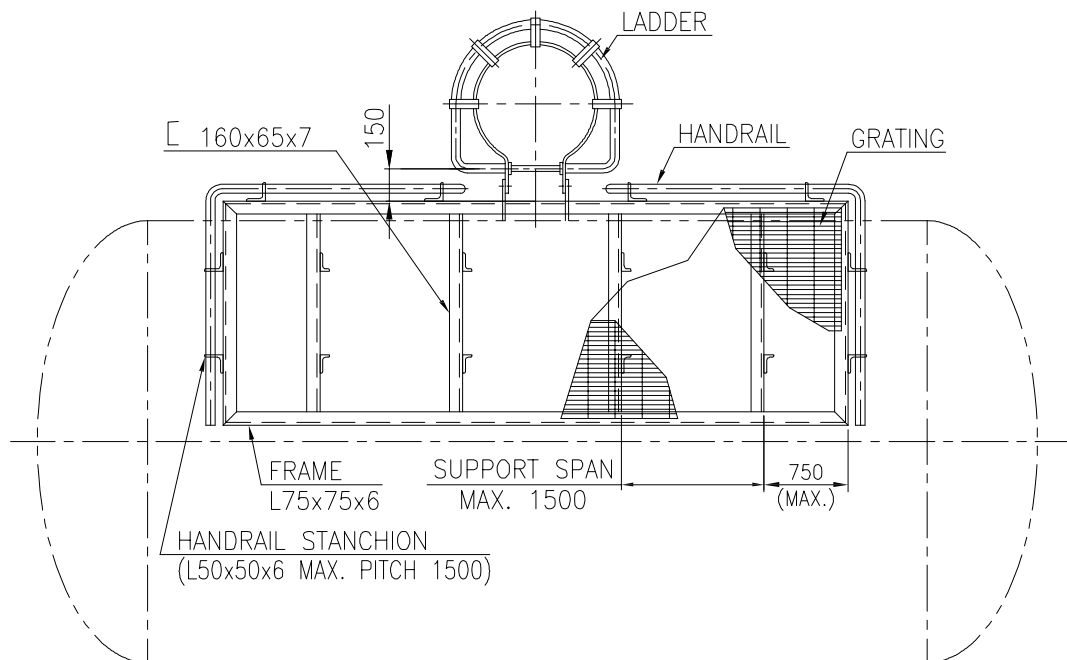

UP TO 1500 WIDTH
(FOR TYPE "A")

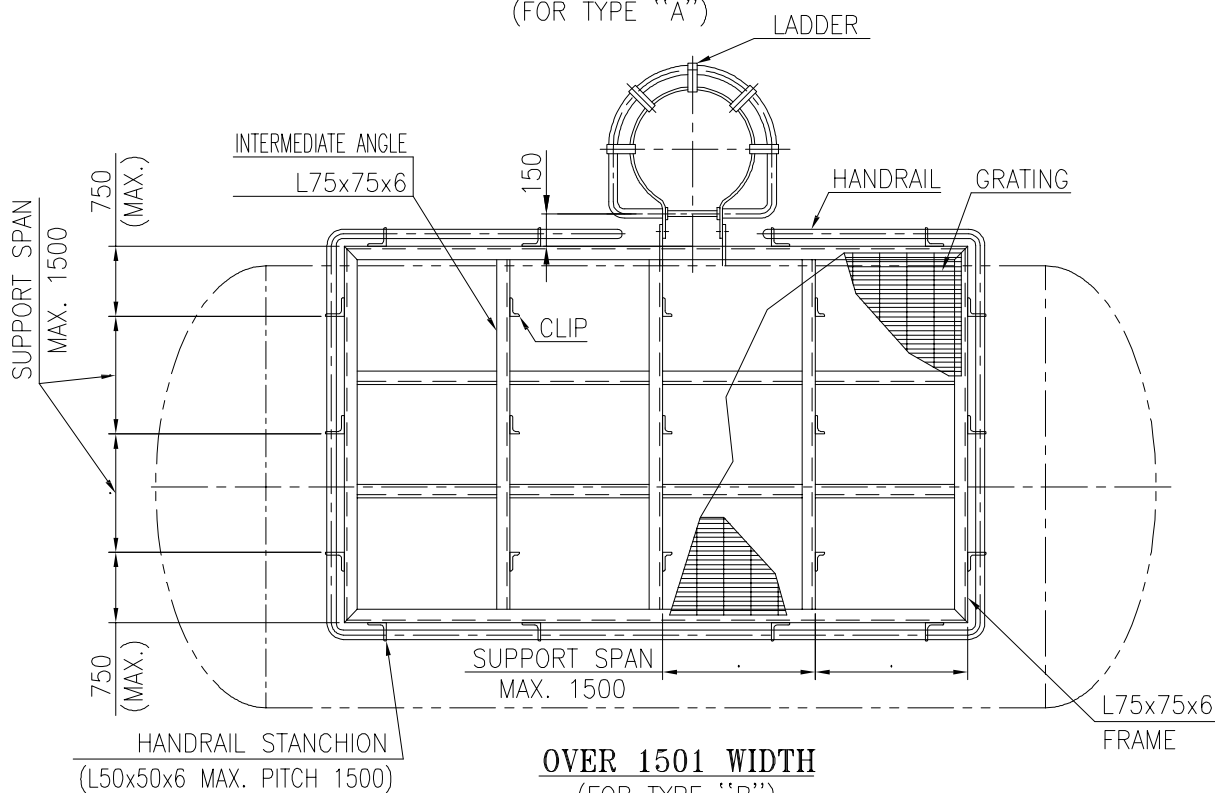


OVER 1501 WIDTH
(FOR TYPE "B")



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک





شماره پیمان:
053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۳۴ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

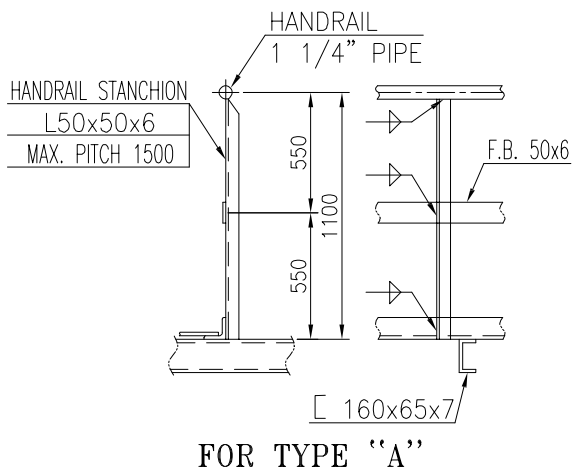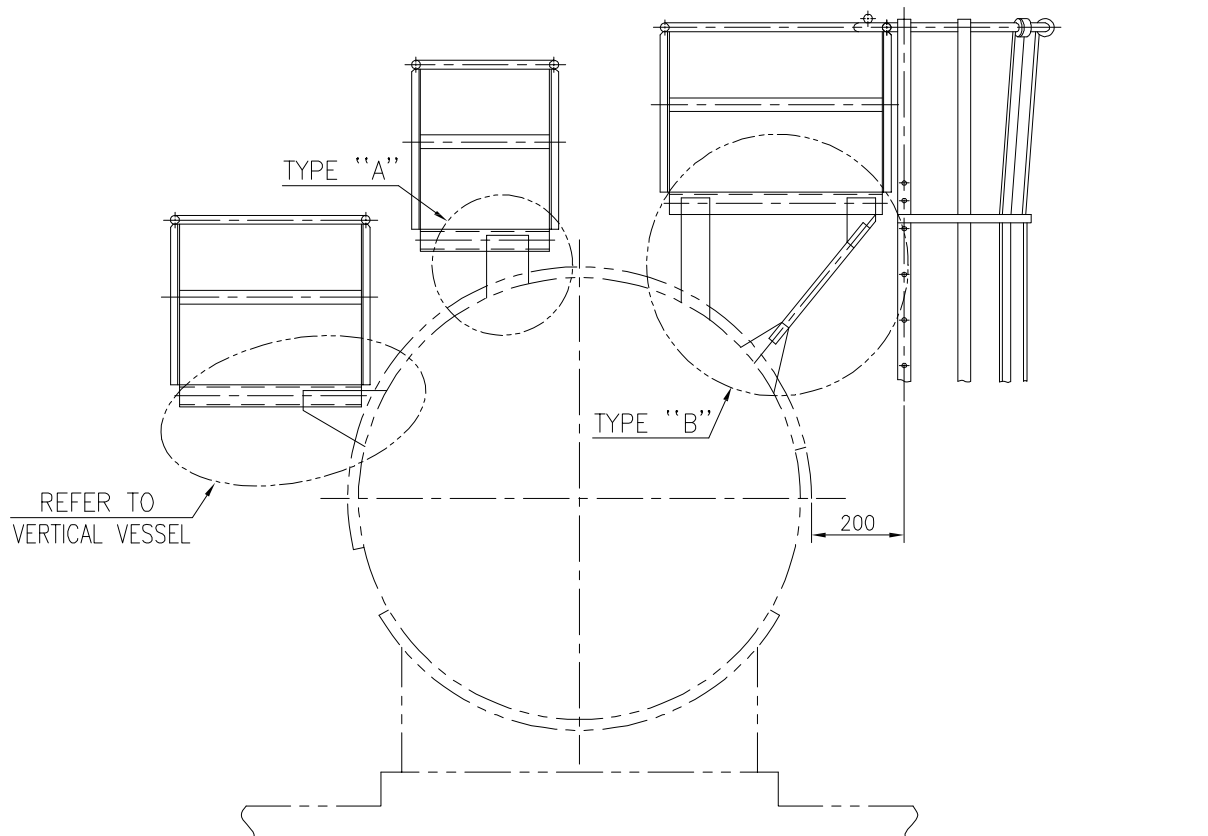

FOR TYPE "A"

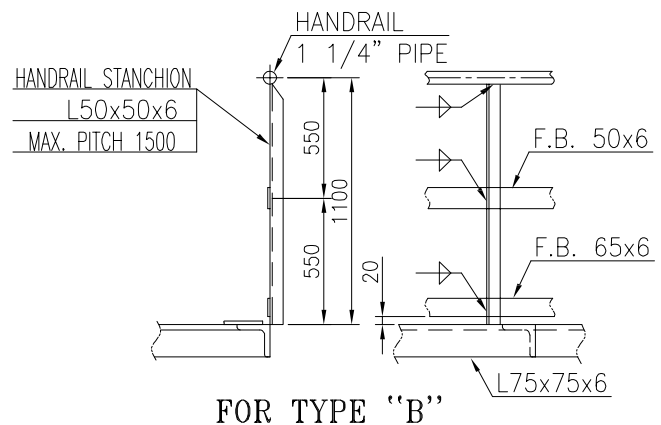


FOR TYPE "B"

DETAIL OF HANDRAIL FOR FOR HORIZONTAL VESSEL



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک





شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۳۵ از ۵۶

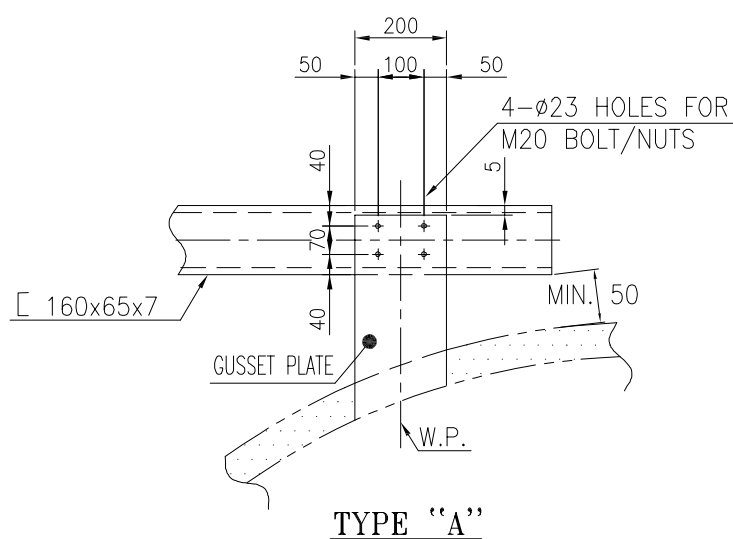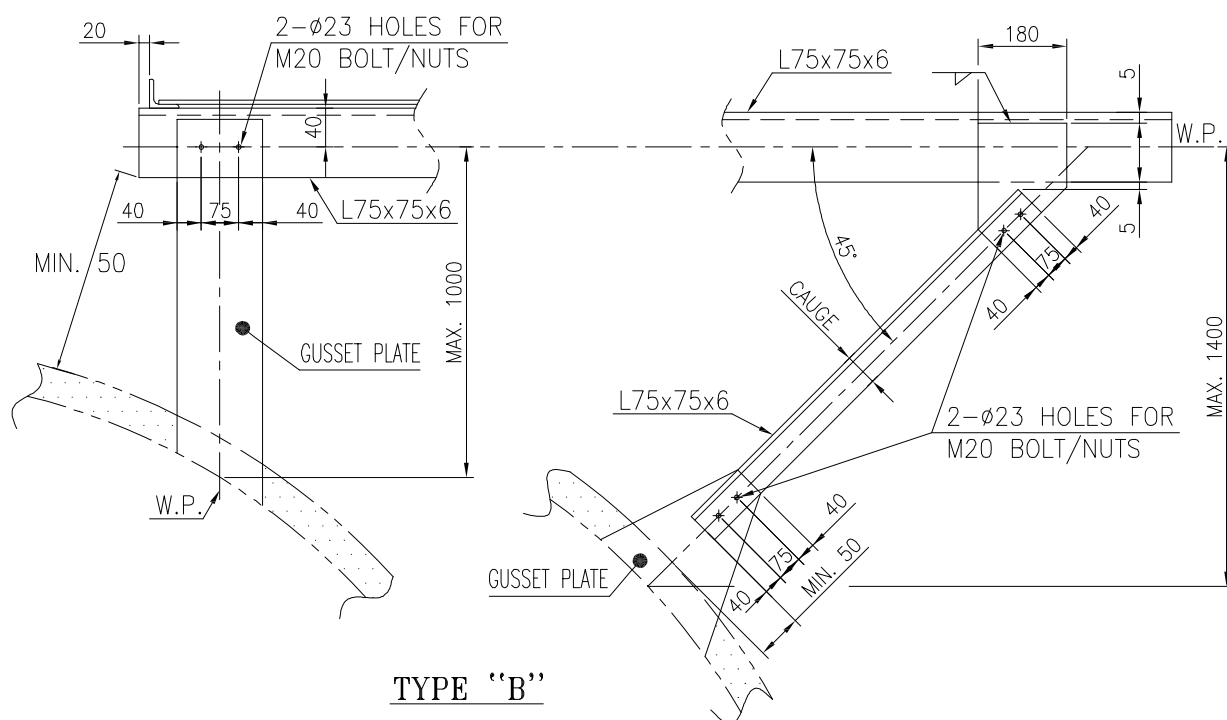


NOTE

- WHEN THE PLATFORM ELEVATION IS LOWER THAN 4M, SAFETY CAGE IS NOT REQUIRED.



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک





شماره پیمان:

053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۳۶ از ۵۶

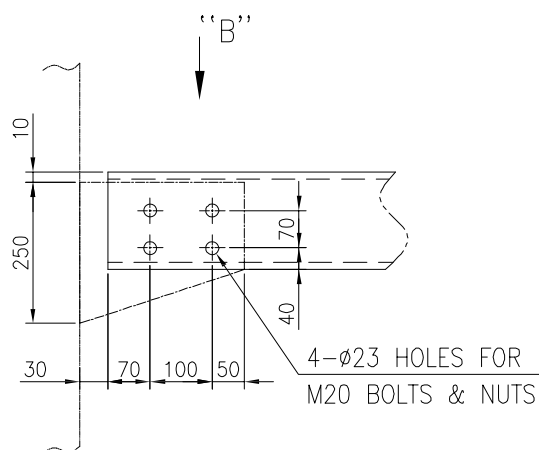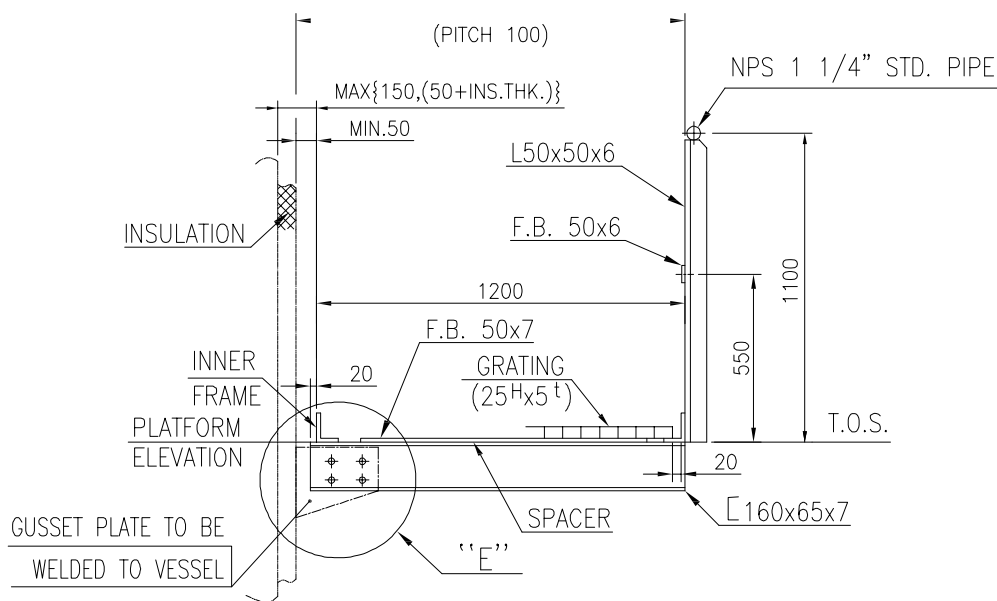

DETAIL "E"

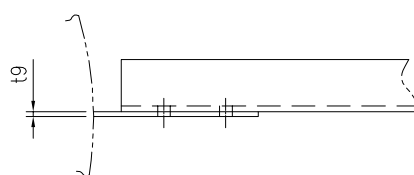


VIEW "B"



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۳۷ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

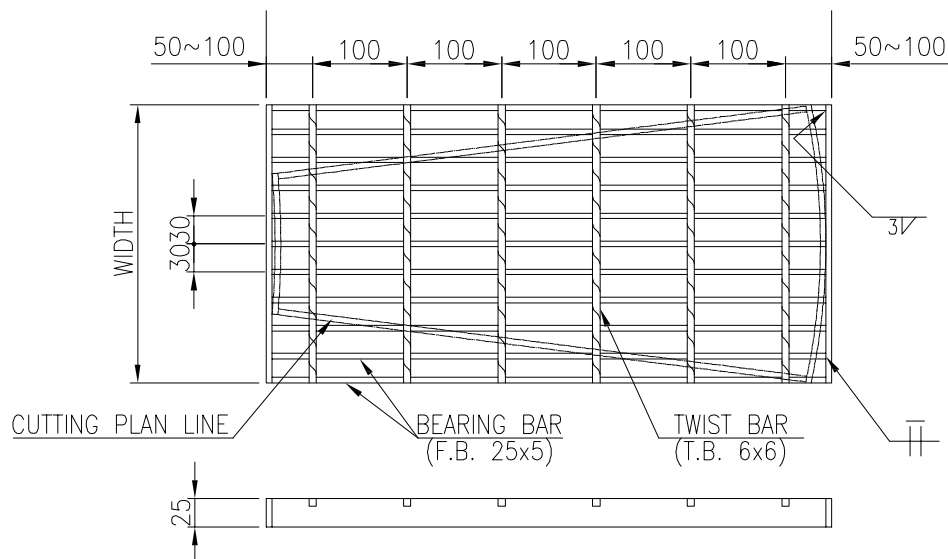


GRATING CUTTING PLAN


25x35 SLOT HOLES
M16 STEP BOLT/NUT
T.WASHER/P.WASHER
(BRACKET SIDE)

25x35 SLOT HOLES
(RING SIDE)

DETAIL "S"

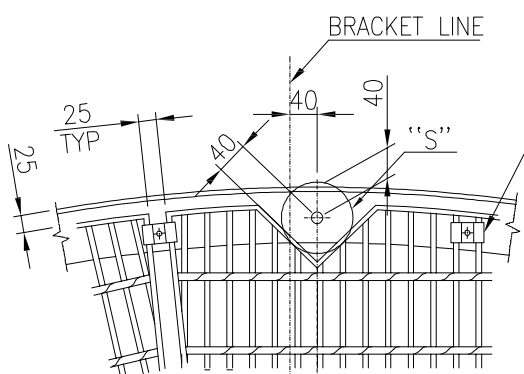

"R" ≤ 900

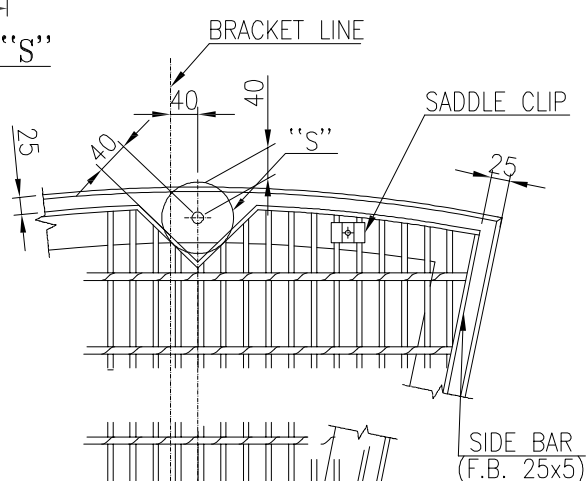


"R" > 900

DETAIL OF BRACKET



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:

053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۳۸ از ۵۶


نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

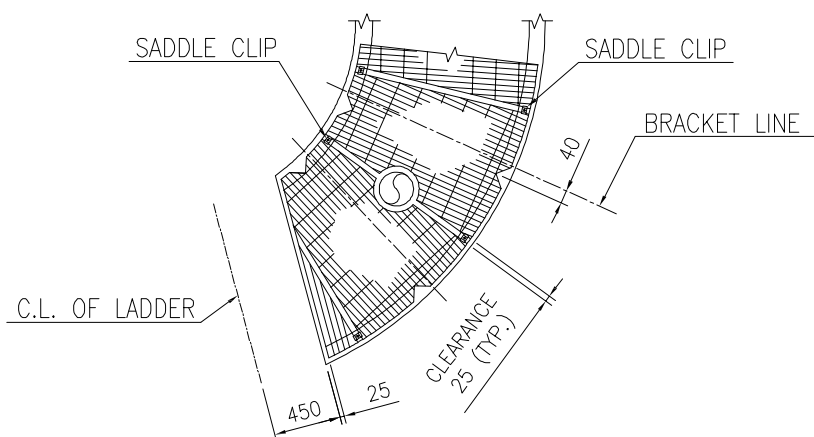


TYPICAL DETAIL OF STRUCTURE

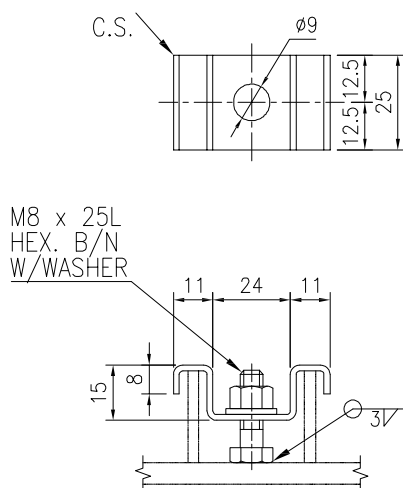


DETAIL OF SADDLE CLIP

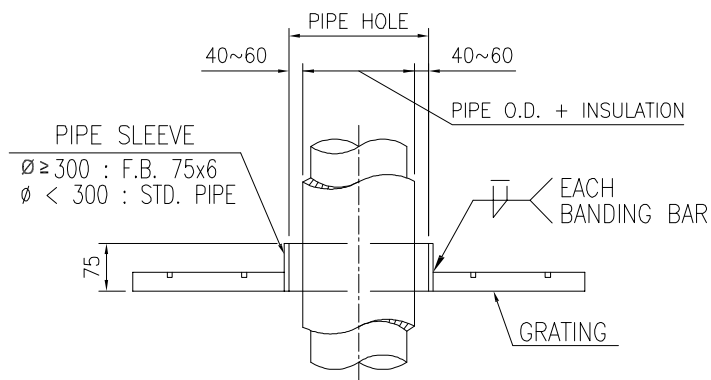

DETAIL OF PIPE SLEEVE

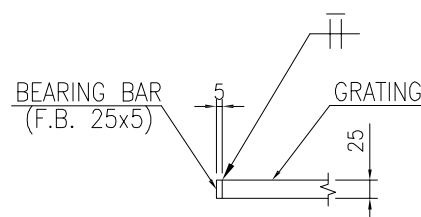


DETAIL OF BANDING BAR

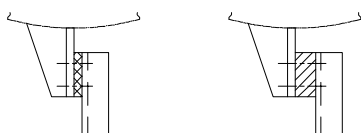

OPER TEMP.: ASBESTOS (-20°C ~ -50°C) WOOD (-51°C ~ -196°C)

COLD TYPE




ASBESTOS (-20°C ~ -196°C) WOOD (-20°C ~ -196°C)

COLD TYPE



نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۳۹ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

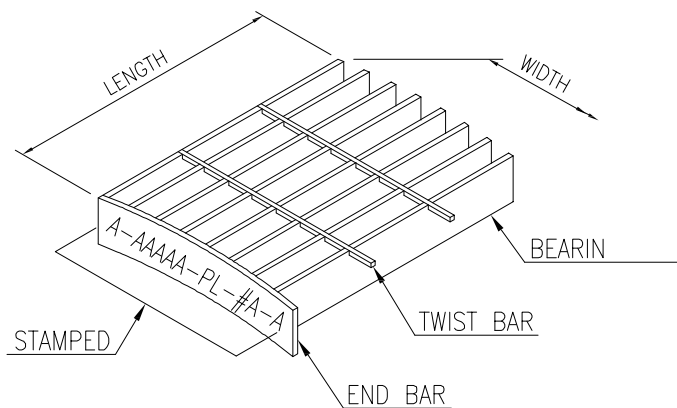

GRATING PIECE MARK

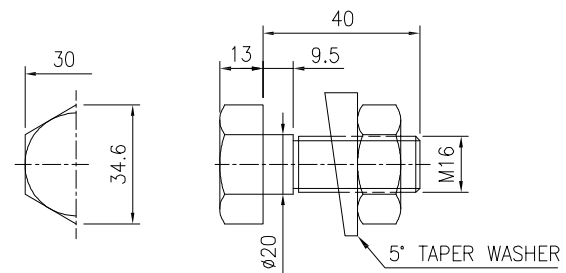


STEP-BOLT & NUT DETAIL
SIZE FOR LADDER

REMARKS:

- ALL DIMENSIONS ARE IN mm.
- MATERIAL SHALL BE AS FOLLOWS:
 GRATING : ...ASTM A36 OR EQUIVALENT
 WITH HOT DIP GALVANIZED
 SADDLE CLIP : ...ASTM 304SS OR EQUIVALENT
 BOLT NUT : ...DEPENDS ON OPERATING TEMPERATURE
 -19°C & OVER ...ASTM A307GR.B OR EQUIVALENT
 -20°C ~ -100°C ...ASTM A320L7/A194GR.4 OR 304SS OR EQUIVALENT
 -101°C & UNDER ...ASTM 304SS OR EQUIVALENT
 WOOD : ...APITONG
 STRUCTURAL STEEL : ...ASTM A36 OR EQUIVALENT
 LUG : ...SEE ENGINEERING DWG.
- DESIGN LOAD OF PLATFORM IS 500 KG/m², UNLESS OTHERWISE NOTED.
- WHEN PLATFORM WIDTH EXCEEDS 1000 mm, THE FLOOR SHALL BE SUITABLY REINFORCED TO PREVENT FLOOR FROM DEFLECTION.
- GRATING TO BE FIXED ON STRUCTURE BY SADDLE CLIPS.
- MIN. WELD LEG IS EQUAL TO 0.7 THINNER PART FOR EACH WELD JOINT OR OTHERWISE IS SPECIFIED.



نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۴۰ از ۵۶


نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

4.13.3 LADDER DETAILS

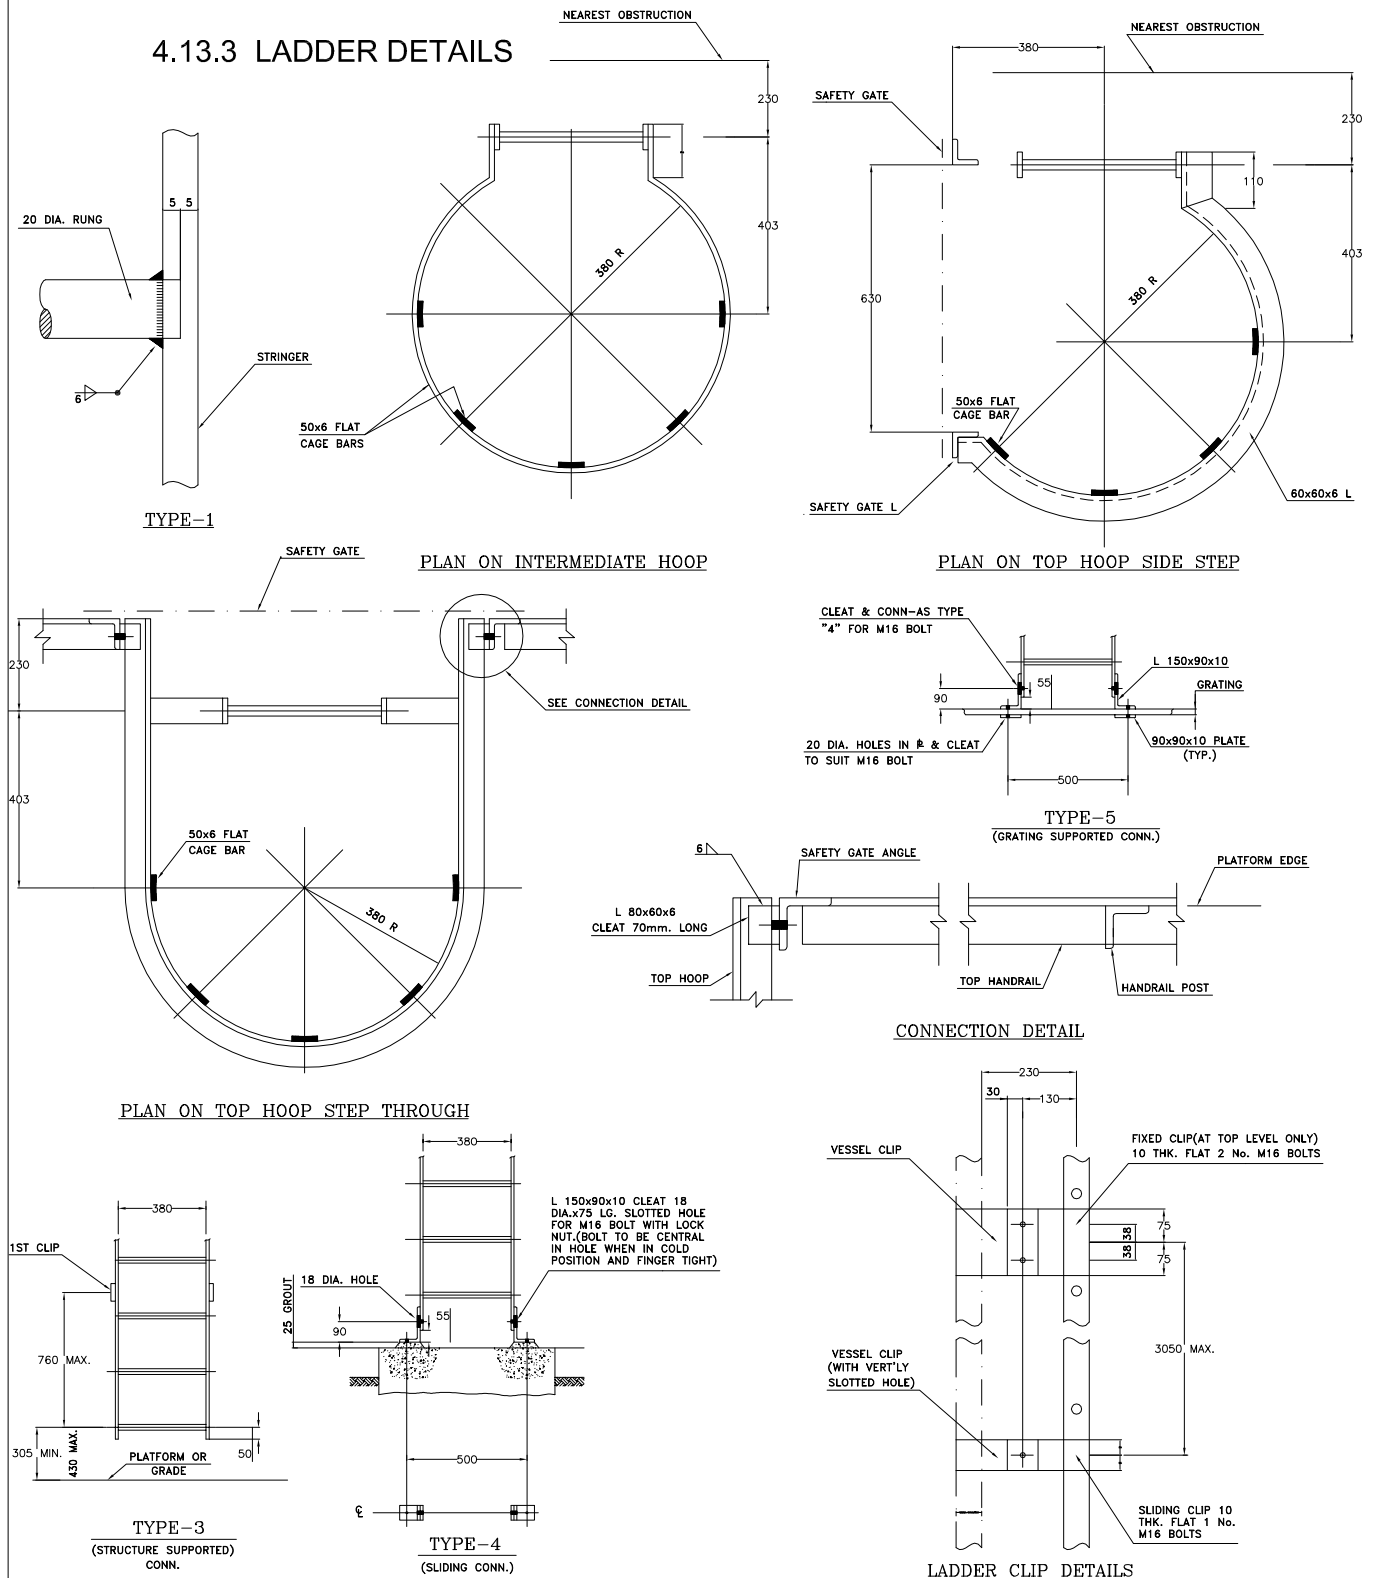



نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۴۱ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

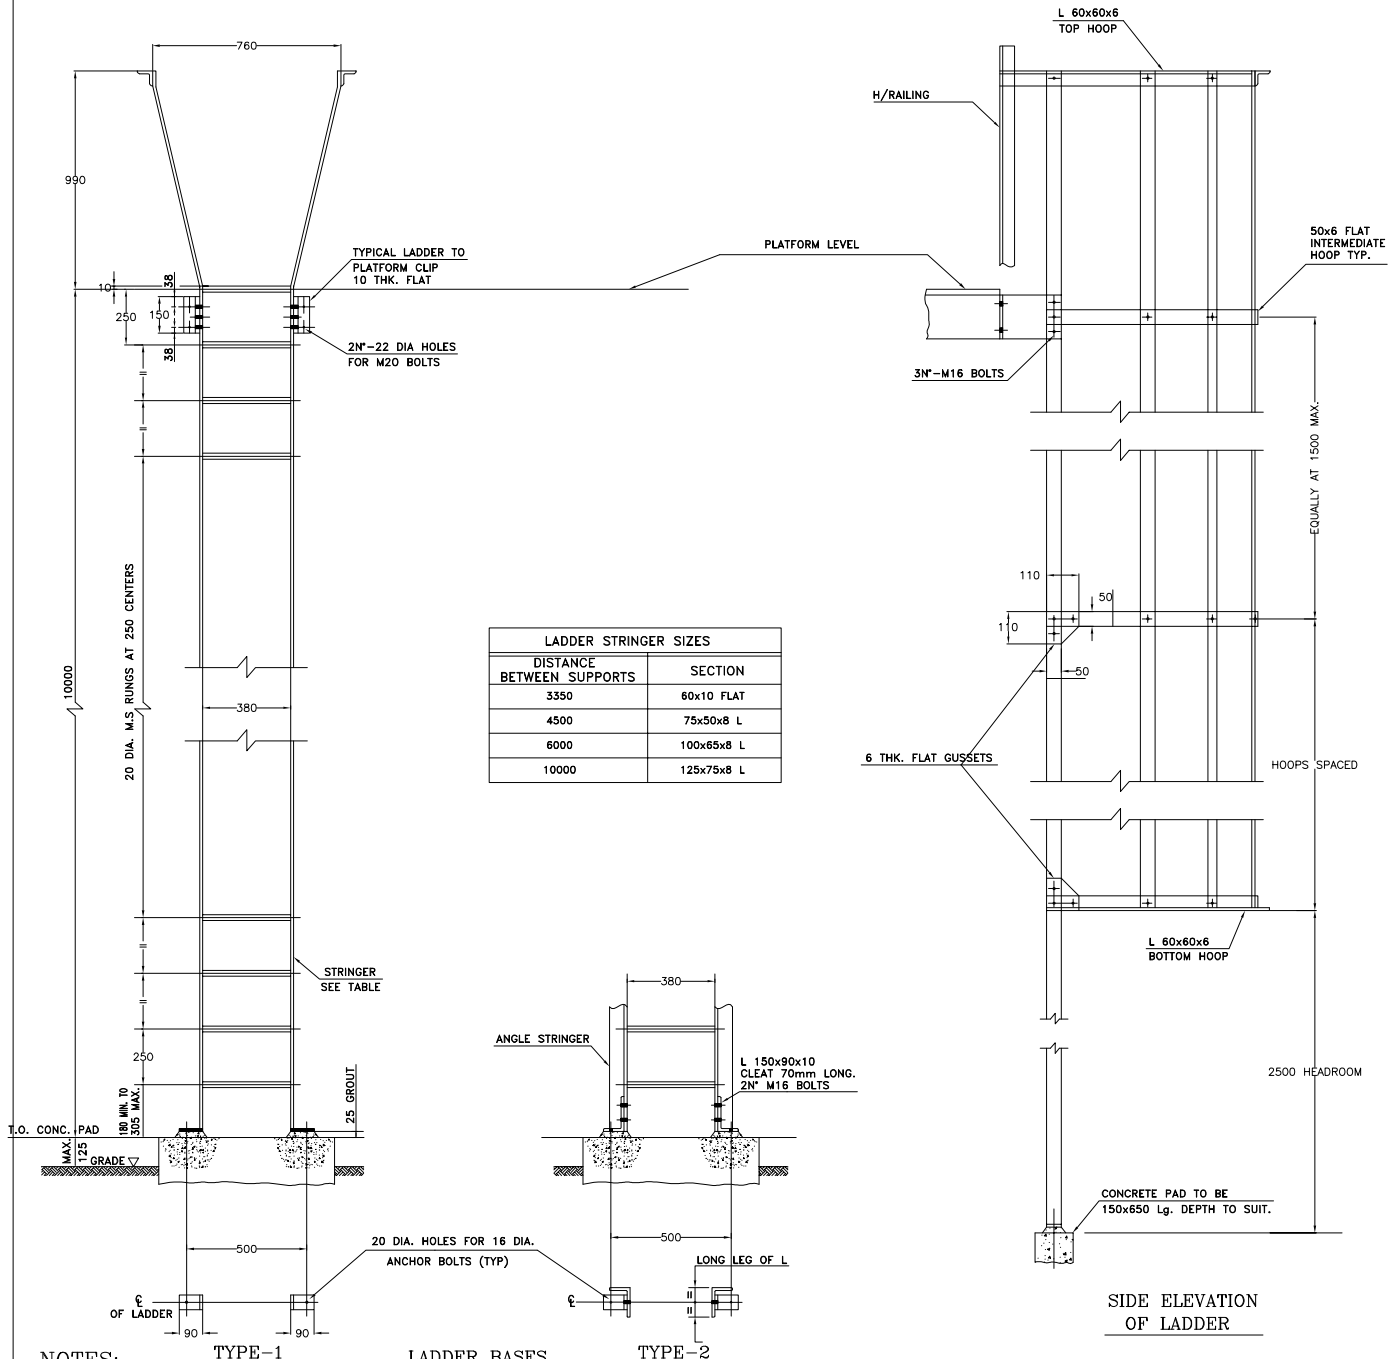


NOTES:

1. All dimensions are in millimeters.
2. Cage to be provided as indicated on layout drawings.
3. Cage is to be of bolted construction using M16 shallow cup headed bolts or alternatively the cage may be of welded construction and if so the corner gussets will not be required but the hoop to stringer joint must have full periphery welds.
4. The top rung shall be at the same level as the platform and shall be extended if necessary to limit the gap between rung and platform to be not more than 75mm. Alternatively the platform may be extended to replace the top rung. (Applicable only to "step through" ladders)
5. Ladders with "side step" entry to extend at least 1200mm. above platform level.
6. On tower platforms the rungs shall be set so that they are in line with the uppermost platform served by that ladder.





نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۴۲ از ۵۶



نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

4.14 FABRICATION DIMENSIONAL TOLERANCES FOR PRESSURE VESSELS

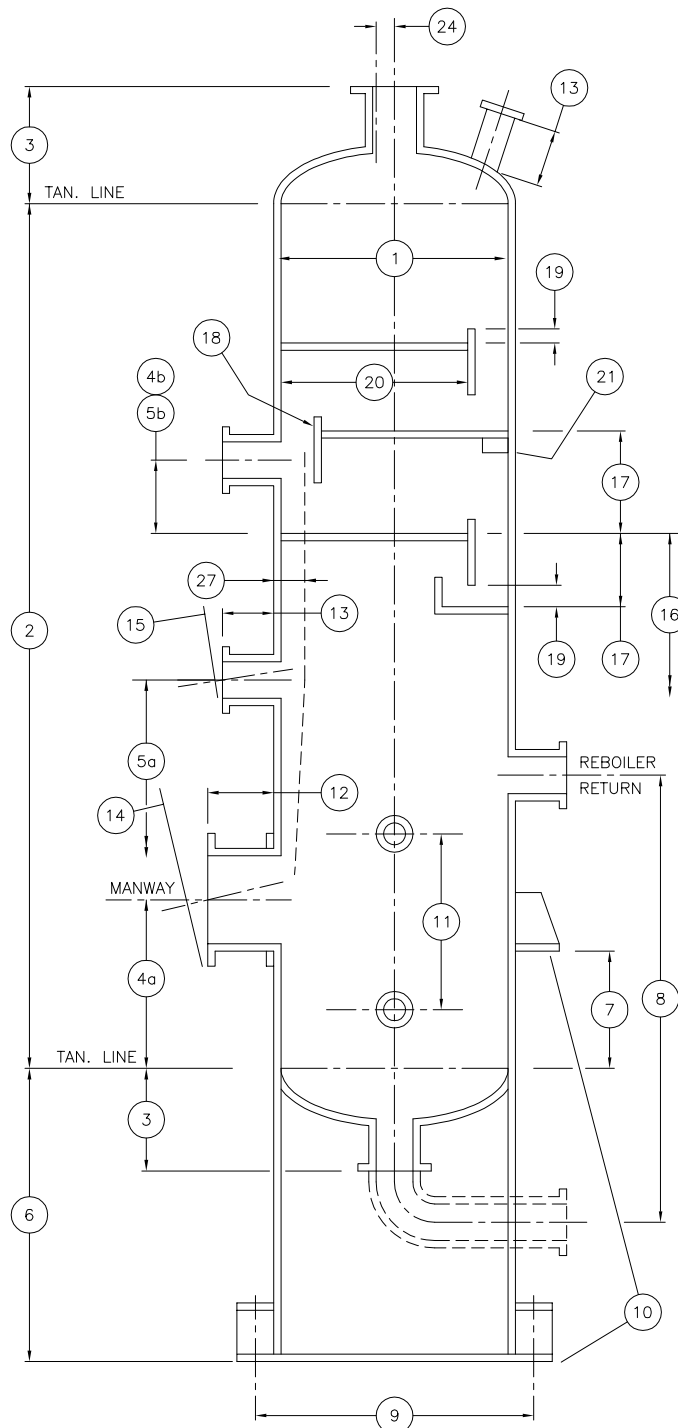


VERTICAL VESSEL

(LOWER TANGENT LINE IS THE REFERENCE PLANE FOR EXTENDED DIMENSIONS)

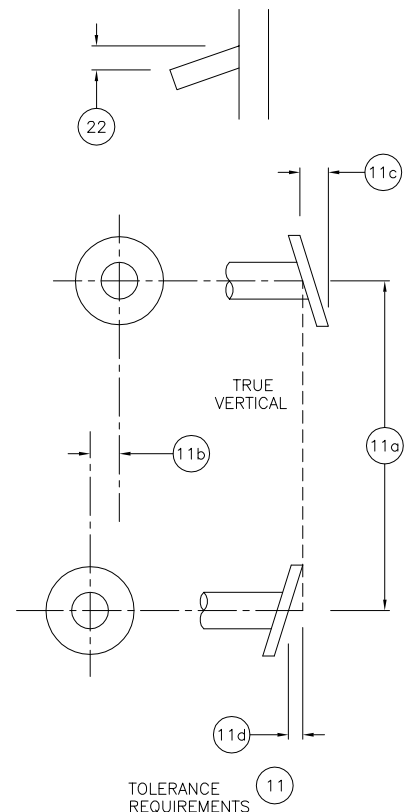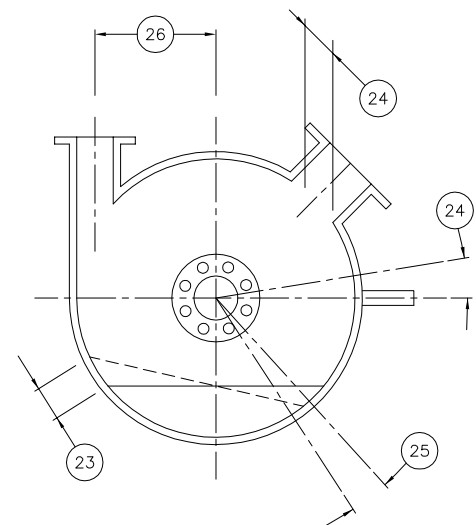



نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۴۳ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

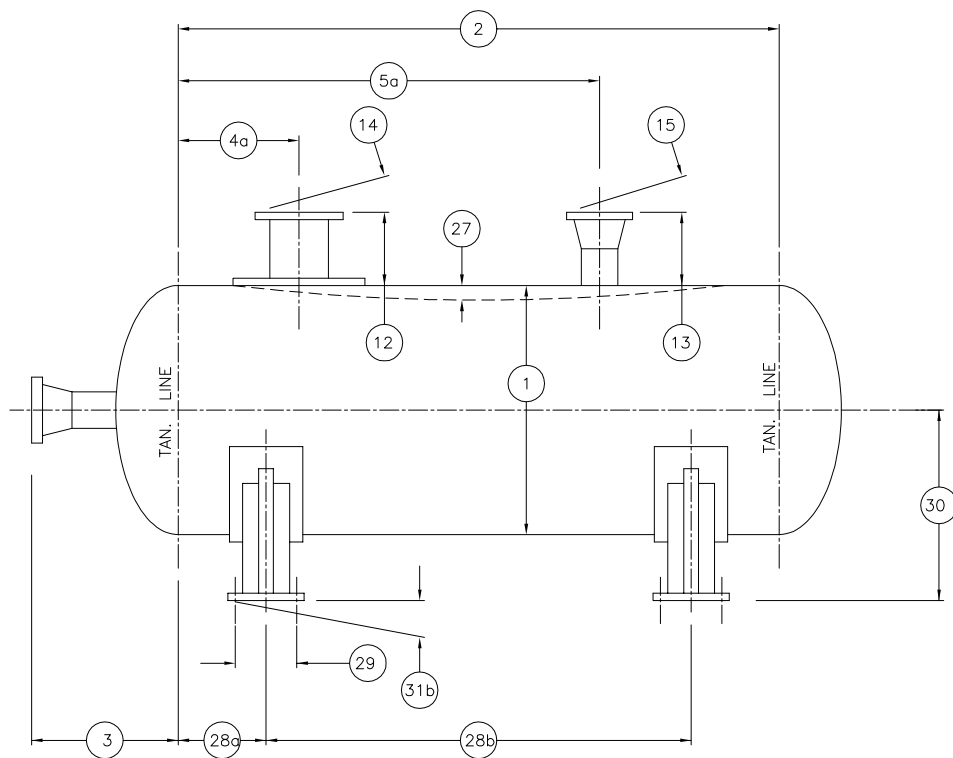

THE SAME TOLERANCES APPLY TO
NOZZLES AND MANWAYS AS FOR
VERTICAL VESSELS.

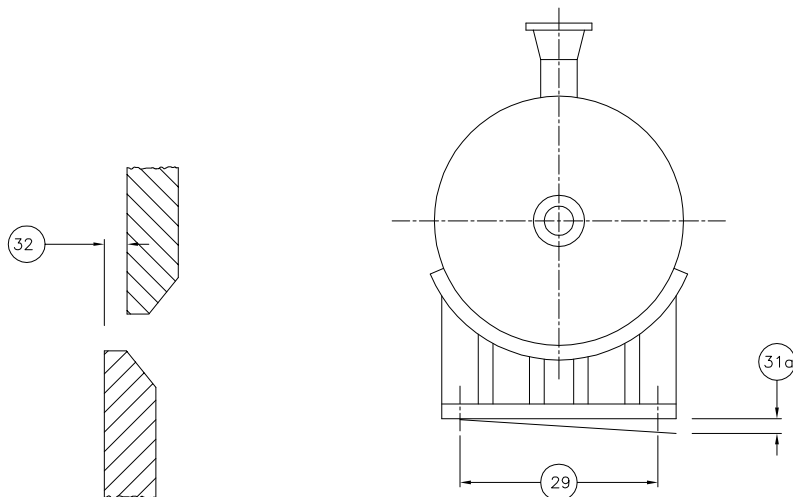


HORIZONTAL VESSELS



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۴۴ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

REFERENCED NUMBERS:

1. Diameter, circumference and OUT-OF-Roundness: The tolerances. On these dimensions should not exceed those specified in the applicable design code such as BS 5500 or ASME VIII division 1. The following shall be complied with for all vessels. The difference between maximum and minimum inside diameters shall not exceed 1% of the inside diameter up to 1900mm or 12mm +0.4% of the inside diameter for larger diameters. The circumferential tolerance for vessels up to 610mm outside diameter shall be $\pm 5\text{mm}$ and $\pm 0.25\%$ of the circumference for larger diameters.

2. Tolerances on length between reference planes (Tangent lines).

Up to and including 2.5m	$\pm 6\text{mm}$
Over 2.5m up to and including 5m	$\pm 10\text{mm}$
Over 5m up to and including 10m	$\pm 13\text{mm}$
Over 10m up to and including 15m	$\pm 16\text{mm}$
Over 15m up to and including 30m	$\pm 20\text{mm}$
Over 30m	$\pm 25\text{mm}$ or as otherwise agreed with vendor

(Consideration must be given to the effect of shrinkage due to welding)

3. Dimension from tangent line to flange face $\pm 5\text{mm}$.
- 4a. Manways to be positioned from tangent line $\pm 13\text{mm}$.
- 4b. Manways related to tray supports and draw - OFF pans $\pm 3\text{mm}$.
- 5a. Nozzles to be positioned from tangent line $\pm 6\text{mm}$.
- 5b. Nozzles related to tray supports and draw - OFF pans $\pm 3\text{mm}$.
6. Distance from underside of base ring to tangent line +0, -12mm.
7. Distance from underside of support to tangent line $\pm 12\text{mm}$.
8. Dimensions for nozzles used as a reboiler connection $\pm 3\text{mm}$.
9. Bolt hole circle (Skirt or support lugs):
For all vessel diameters $\pm 3\text{mm}$. Circumferential position of bolt holes $\pm 3\text{mm}$ from designed position.
10. Base ring out of level (Measured over any diameter). (See also sheet 5 of 5)

VESSEL DIAMETERTOLERANCE

Up to and including 2m	3mm
Over 2m	6mm


11. Where dimensions between nozzles have to be maintained e.g. level gauge connections.

- 11a. Distance between nozzle $\pm 1.5\text{mm}$.
- 11b. Difference of orientation not to exceed 1.5mm.
- 11c. Flange face from vertical plane not to exceed 1.5mm.
- 11d. Flange face not to deviate from parallelism when compared with a flat surface by more than 0.5mm per 100mm of flange diameter.
12. Dimension from manway flange face to vessel outside diameter $\pm 10\text{mm}$.
13. Dimension from nozzle flange face to vessel outside diameter $\pm 5\text{mm}$.
14. The maximum tilt across full manway flange face not to exceed 6mm.
15. Nozzle flange face not to deviate from parallelism with the indicated plane in any direction by more than 1mm per 100mm of flange diameter ($\pm 1/2\%$) to a maximum of 6mm. (see also page 6).
16. Dimension between the first tray support ring and the tangent line $\pm 5\text{mm}$.
17. Distance between adjacent tray support rings and related parts (Height of downcomers and weirs) $\pm 3\text{mm}$.



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۴۵ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

18. Top of weir to be level within the following:

VESSEL DIAMETERDIFFERENCE BETWEEN HIGH AND LOW POINT

Up to and including 1.2m	3mm
Over 1.2m up to and including 2.4m	5mm
Over 2.4m	6mm

19. Height of weir of bottom of downcomer bar above tray support ring ± 3 mm.20. Weir location to far of tower ± 10 mm.

21. Tray support rings across the diameter shall be level within the following limits:

VESSEL DIAMETERDIFFERENCE BETWEEN HIGH AND LOW POINT

Up to and including 1.2m	3mm
Over 1.2m up to and including 2.4m	5mm
Over 2.4m	6mm

22. Tray support ring to be at right angles to shell within a tolerance of 1mm per 50mm of support width.

23. Radial orientation of downcomer and seal pans measured on the internal surface of vessel ± 6 mm.24. Orientation of nozzles and other attachment measured by strapping of shell ± 6 mm.25. Maximum rotational displacement of bolt holes not to exceed ± 1.5 mm.26. Tangential nozzles to be parallel with the indicated centerline of vessel to within ± 3 mm over the indicated length.

27. The maximum deviation of shell from a straight line over any section of vessel shall not exceed 0.1% of the length of that section with a maximum of 12mm in 15000 or 50mm overall. Inspector shall select sections which provide the most severe check.

A vertical vessel shall be installed to the same tolerance for verticality I.E. 0.1% of length or 50mm maximum. Distortion caused by welding of circumferential or longitudinal joints shall not exceed 6 mm maximum depth in a 900mm length of shell centered on the weld.

For design deflection criteria, refer to project specification 602-000-ME-SP-002 Para 4.7.

28. Location of saddles.

28a. From saddle centerline to tangent line and

DIMENSIONTOLERANCE

Up to and including 4m	± 3 mm
Over 4m up to and including 7m	± 6 mm
Over 7m up to and including 10m	± 9 mm
Over 10m	± 13 mm

29. Bolt hole centers ± 3 mm

30. Height of saddle +0, -6mm

31a. Deviation from level of saddle base along its length 3mm maximum.

31b. Deviation from level of saddle base across its width shall be 1.5mm maximum.


32. The butting edges of the plates forming the longitudinal and circumferential seams shall be in line within the following limits:

Plates up to 10mm thick	-1mm
Plates over 10mm to 50mm thick	-10% Of the plate thickness or 3mm whichever is smaller
Plates over 50mm thick	-T/16 OR 6mm Whichever is smaller.



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:



053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger


نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۴۶ از ۵۶

4.15 VERTICAL VESSEL INSULATION AND FIREPROOFING SUPPORTS

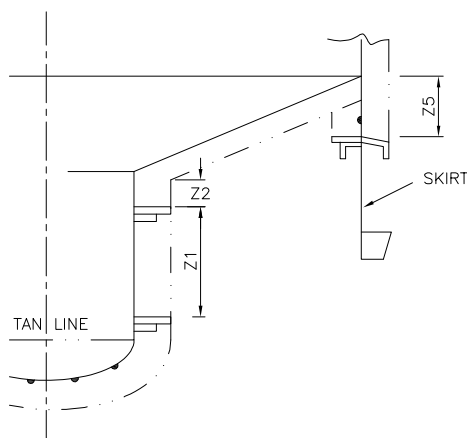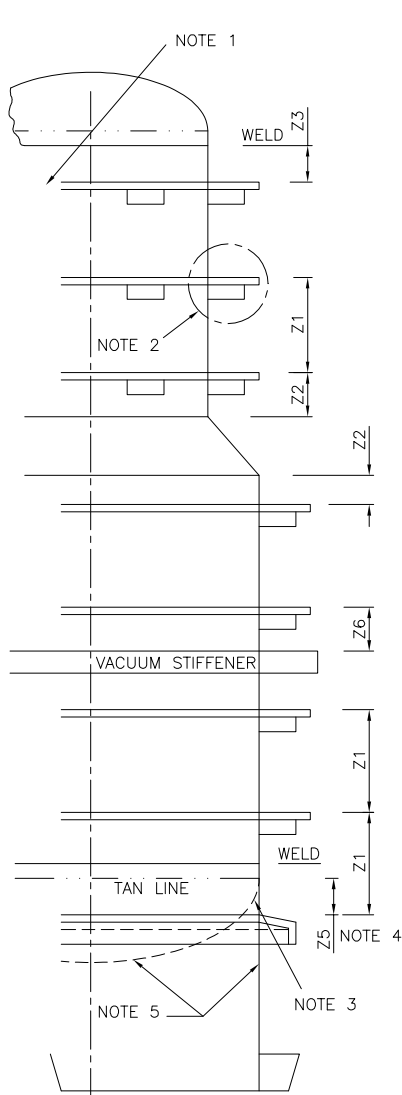


TYPE 1

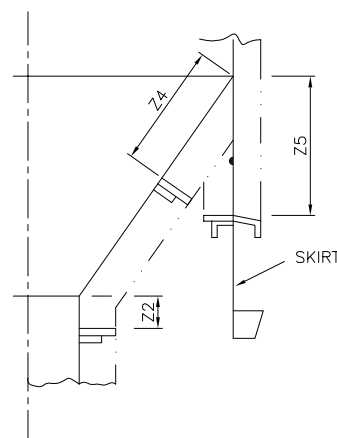

TYPE 2

STANDARD DIMENSIONS

- Z1 = 1000 MIN.
3600 MAX.
- Z2 = 150
- Z3 = 300
- Z4 = 600
- Z5 = 600 MIN.
900 MAX. NOTE 4
- Z6 = INSULATION
THICKNESS + 150

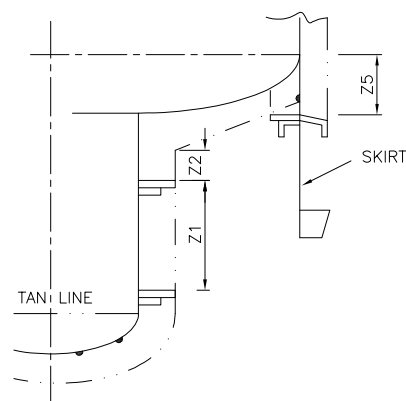

TYPE 3

TYPICAL SPACING OF INSULATION SUPPORTS

NOTES:


- Clips are not required on top head unless specified on vessel data sheet.
- Details at clip supports type 'A' or 'B'.
- Skirt hot box to be fitted only when required. limitations and details on sheet 4 of 4.
- Standard location of lower ring is 600. position may be adjusted within stated dimensions to clear nozzles, external attachments and welds.
- For inside skirt and bottom head insulation and fireproofing supports see sheet 3 of 4.
- Vessel data sheet will specify when fireproofing is required.
- When skirt diameter is less than 1200, nuts are only required on the outside of the skirt.
- Based on 75 thick insulation. dimension to be adjusted for greater insulation thickness.

TYPE 1, 2 & 3 ARE DETAILS FOR OPEN SKIRTS



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک







شماره پیمان:

053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	یسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۴۷ از ۵۶

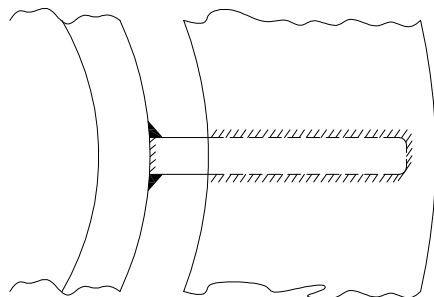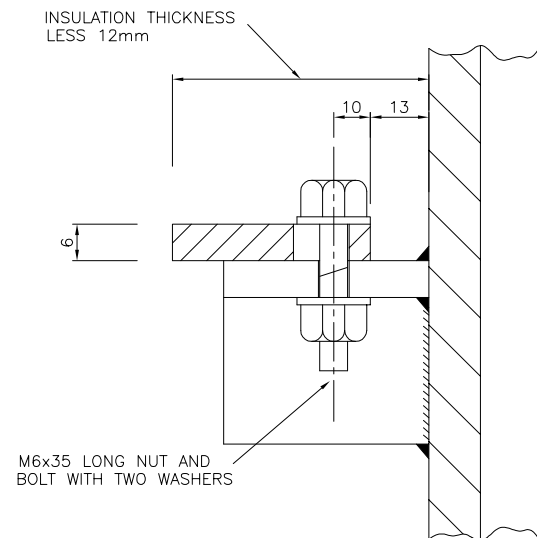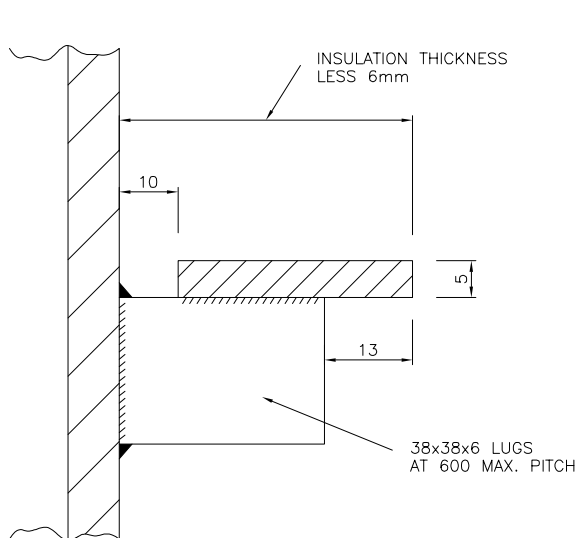

TYPE 'A' RING
FOR INSULATION LESS THAN 63mm THICK.

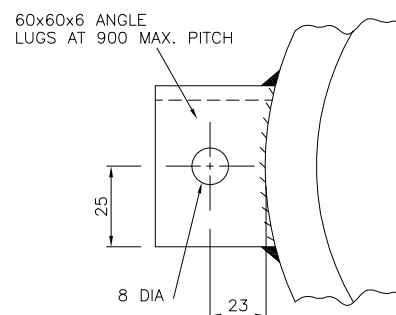

TYPE 'B' RING


NOTES - CONTINUED:

9. Angle lugs may be fabricated from plate.
10. 6mm Continuous fillet welds required in all locations.
11. Where insulation rings coincide with nozzles and manways the ring should be cut and A lug fitted at each end. no lug welds are to be less than 40mm from any nozzle welds.
12. Rings can be butt welded. if not they must form a complete ring with A lug at each end of each ring segment.



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک






شماره پیمان:

053-073-9184


Standard Detail Drawing for Pressure Vessels and Heat Exchanger

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK


شماره صفحه: ۴۸ از ۵۶

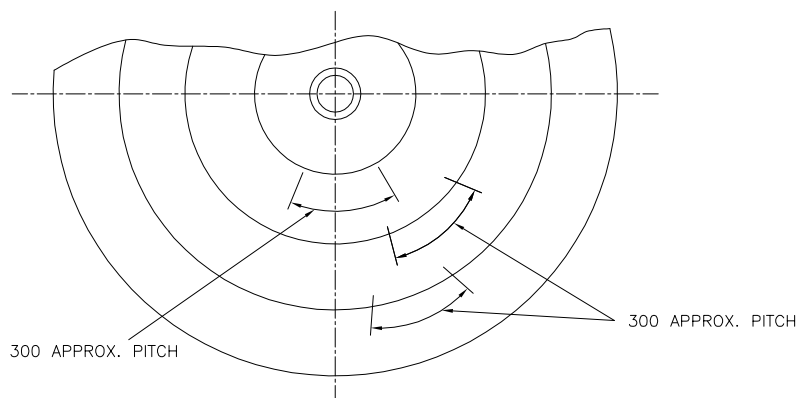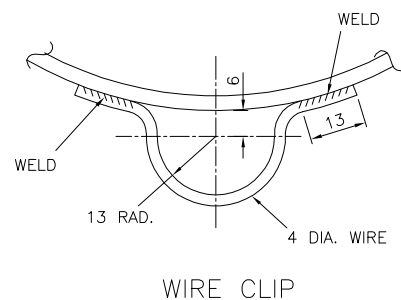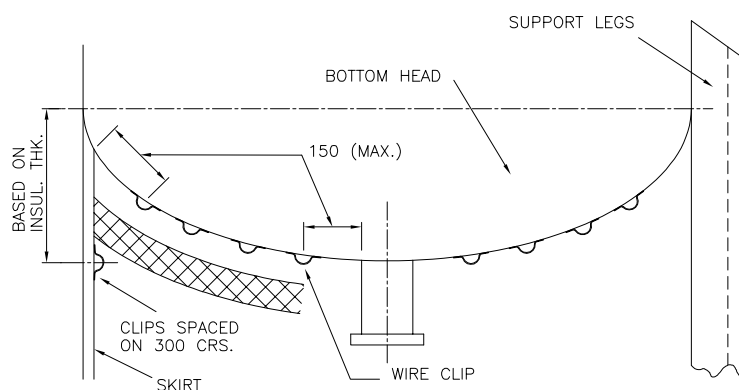

BOTTOM HEAD DETAILS

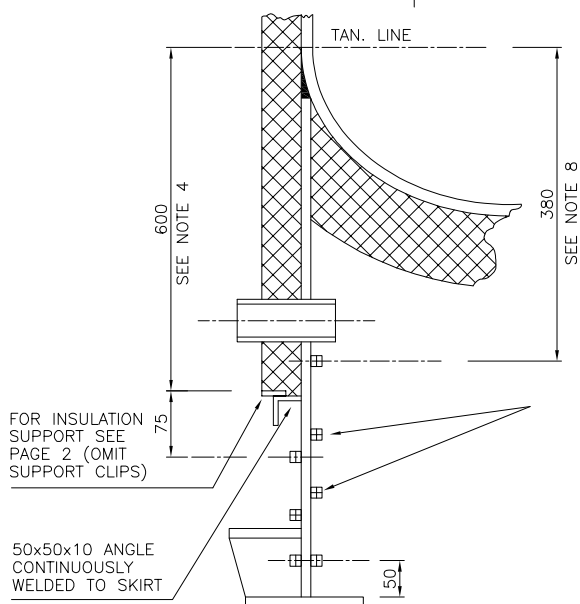

INSULATED VESSEL

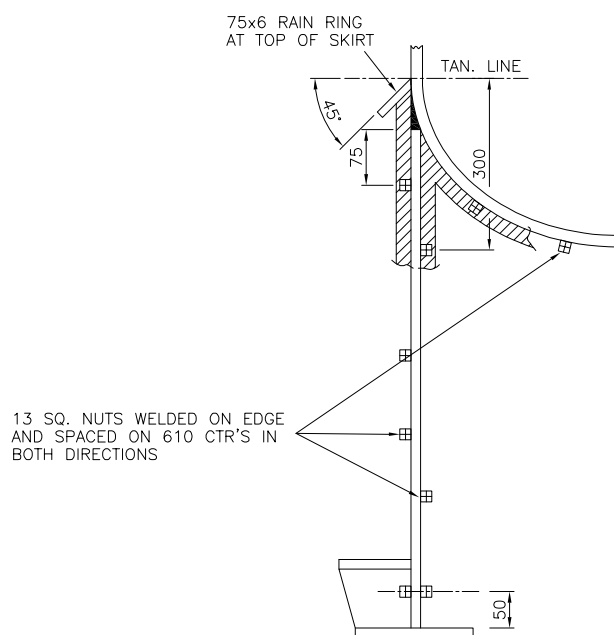


UNINSULATED VESSEL

FIREPROOFING SUPPORT DETAILS



نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۴۹ از ۵۶


نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

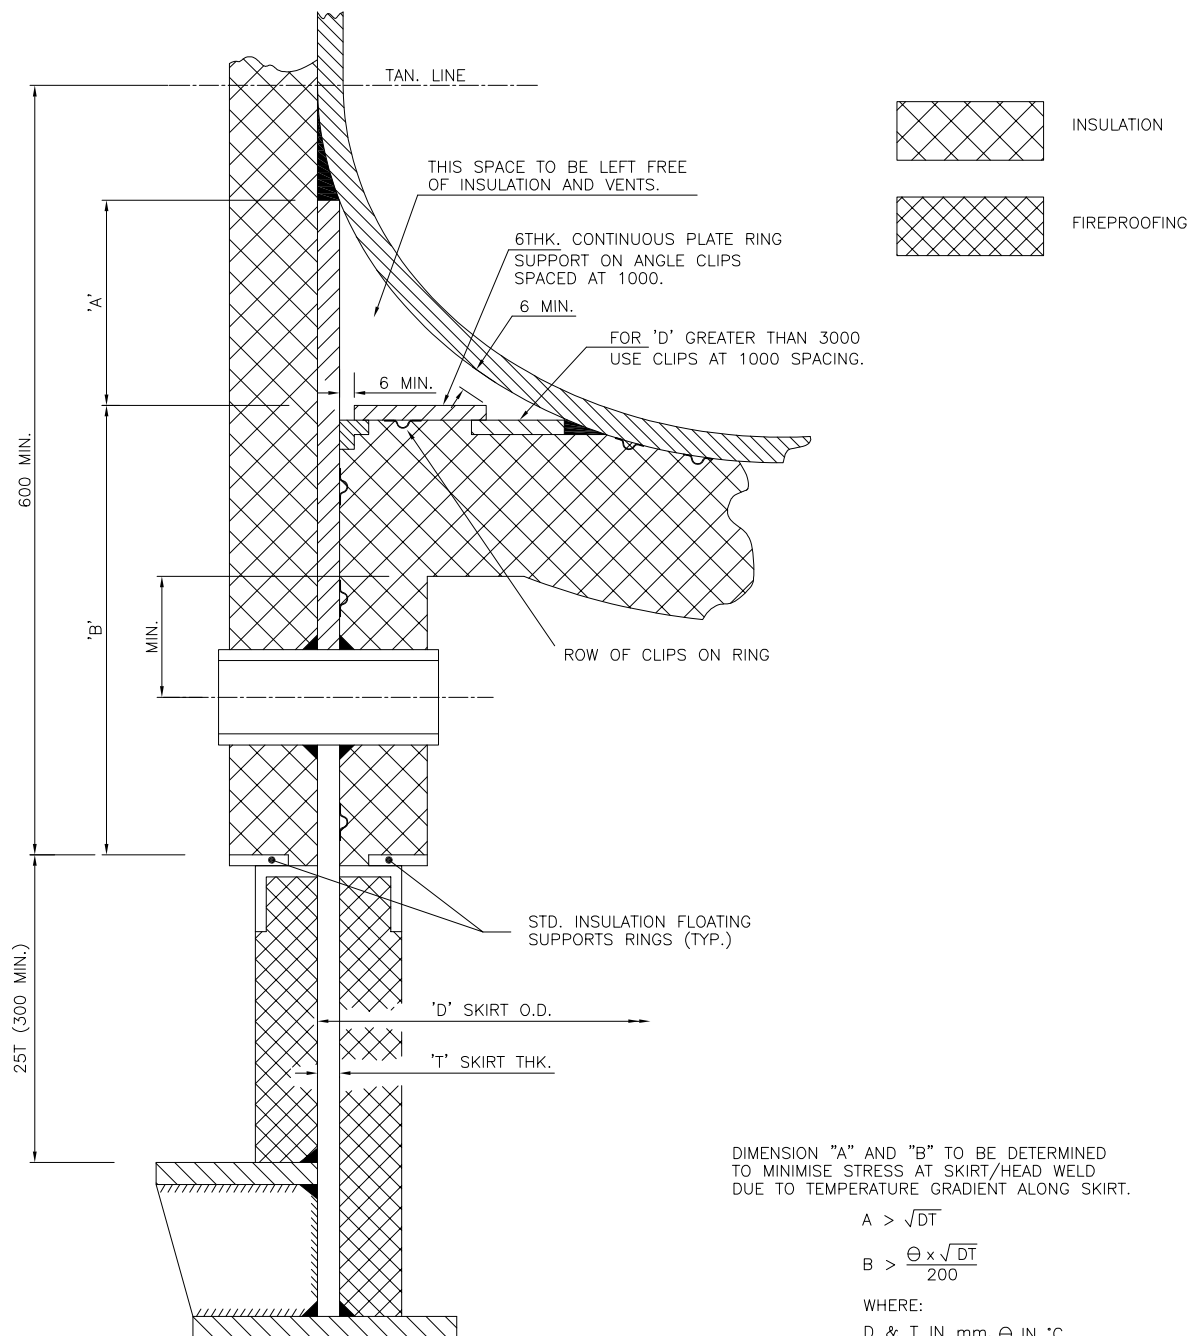

SKIRT HOT BOX DETAIL TO BE USED
FOR DESIGN TEMPERATURE (Θ) OVER 340°C
OR DxTx Θ GREATER THAN 1.6×10^7



نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک




شماره پیمان:
053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۵۱ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

4.17 TEMPLATE FOR VERTICAL VESSELS

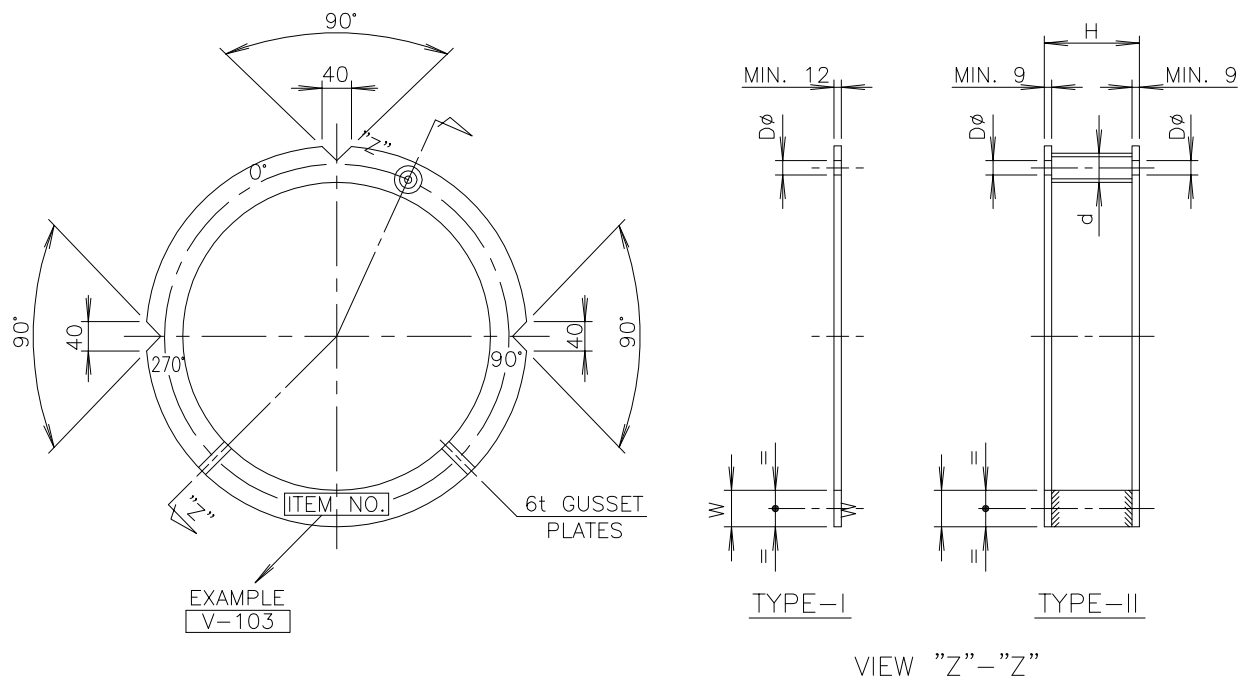

	BOLT SIZE								
	M24	M30	M36	M42	M48	M56	M64	M72	M80
H	262	314	314	316	376	399	429	462	535
W	100	100	110	120	130	150	160	170	180
Dø	26	33	39	45	52	62	70	78	86
d (NPS)	1 1/2	1 1/2	2	2	2 1/2	3	3	4	4


NOTES :

- All dimensions are in mm.
- Materials shall be as follows:
Plate ASTM A283-GR.C or equivalent
Pipe ASTM A120 or equivalent
- Bolt holes in template and base ring of vessel shall be drilled using the same gauge plate.
- Reinforcement of template shall be designed to prevent deformation, during transportation.
- Orientation mark 0°, 90°, 270° and item number shall be marked by hard stamp and white paint on the upper face of template.
- In case bolt pitch is 800 mm and over, gusset plates shall be required.
- Divided templates shall be reinforced for transportation, etc. and adjusted easily for site assembling.



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:


053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger


نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

شماره صفحه: ۵۲ از ۵۶

4.18 EARTHLING BOSS

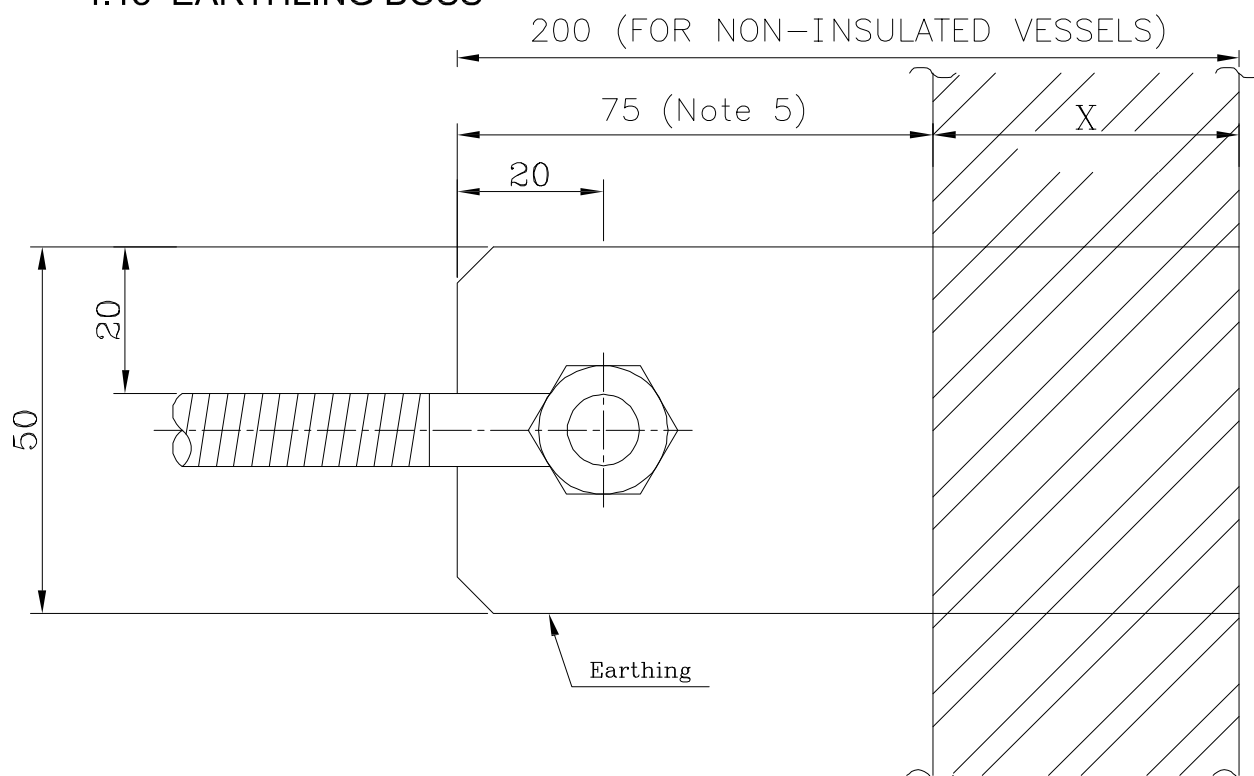

Bolt & Nut With 1-Spring &
2-Flat Washers Size: M10 x 25L

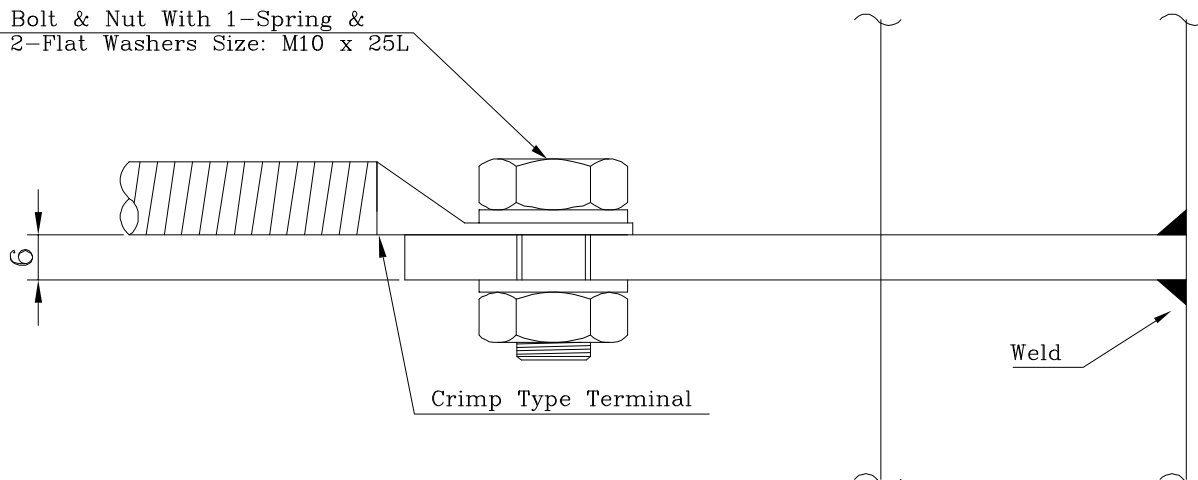

NOTES:

1. Earthing Lug Shall Be Hot Dip Galvanized Steel.
2. "X" Is Thickness Of The Fireproofing Or Insulation, if any.
3. Earthing Lug Can Be Used For Vessels, Tanks, Steel Structures, Pipe Rack & Pipes.
4. Dimensions Are In mm.
5. For Insulated vessels, the earthing boss standoff length shall be 75 mm.



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:


053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger


شماره صفحه: ۵۳ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

4.19 NAME PLATE FOR PRESSURE VESSELS

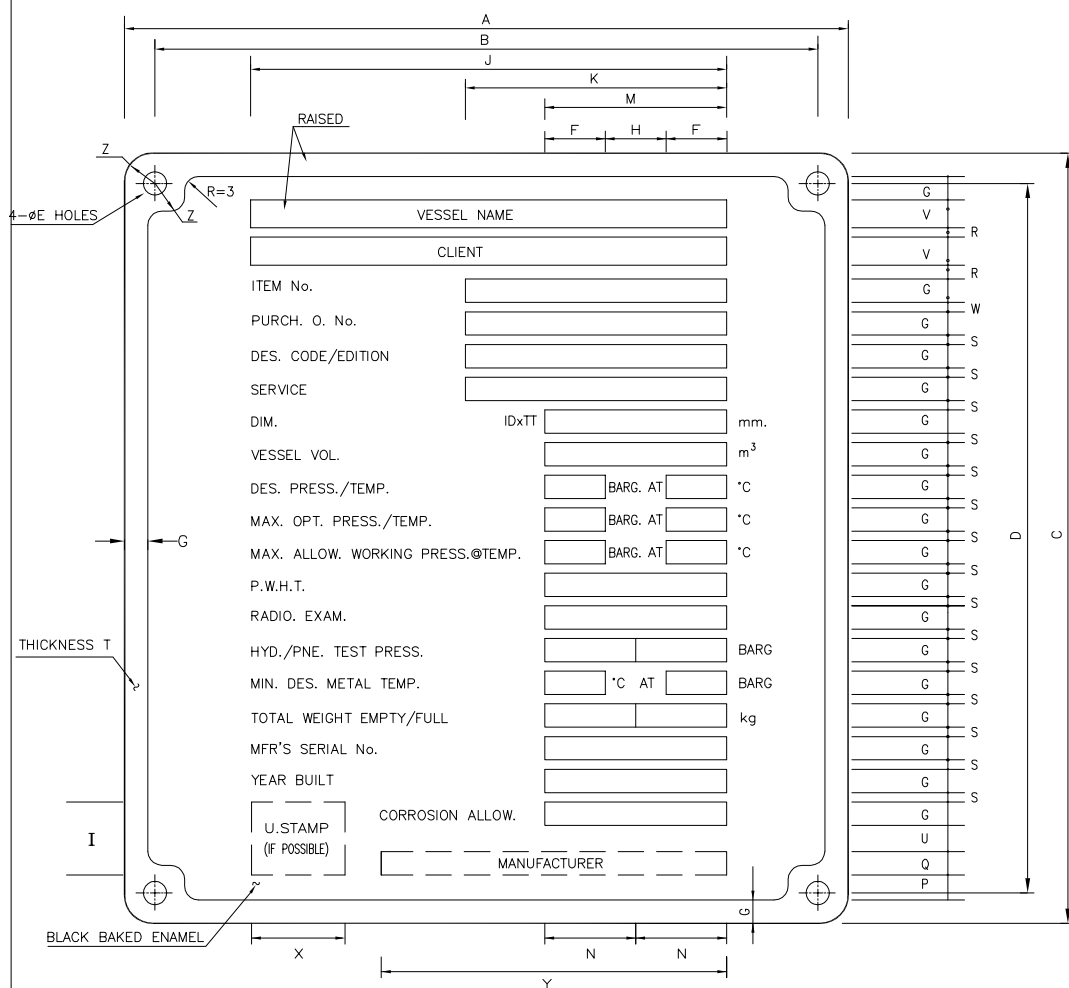


TYPE	A	B	C	D	E	Z	G	N	J	K	M	F	H	P	Q	R	S	T	U	V	W	Y	X	I	a	b	c	d	L	e	t1	t2
I	128	120	141	133	4	4	4	11	70	35	22	7	8	2	5	2	1	1	6	5	4	50	12	15	138	120	105	97	16	3	4	4.5
II	188	178	193	183	4	5	6	12.5	100	50	25	8	9	5	6	3	2	1	4	7	6	75	14	16	198	178	157	147	16	3	4	4.5
III	328	308	287	267	7	10	8	25	200	100	50	16	18	10	12	6	4	2	10	14	12	150	26	30	348	308	250	230	18	6	5	6

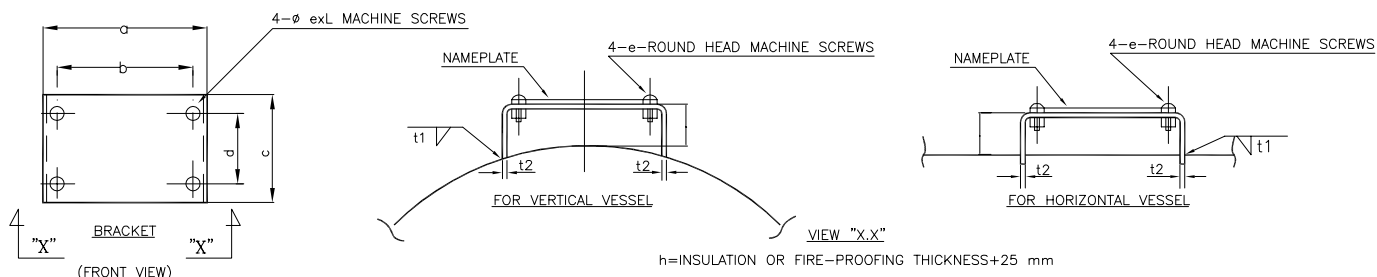



NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۵۴ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهيلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

INDICATION OF NAMEPLATE

1. All dimensions are in mm.
2. Lettering shall be in roman vertical block type.
3. Contents shall be indicated as follows:
 - (1) Vessel name : full name as shown in vessel drawing.
 - (2) Item number : designated mark and number as shown in vessel drawing.
 - (3) Design code : applied code title e.g. asme viii div. 1.
 - (4) Post weld heat treatment : "YES" OR "NO".
 - (5) Radiographic examination : "FULL", "SPOT" OR "NO".
 - (6) Weight : net weight of the empty vessel
 - (7) Year built : month and year of completion e.g. oct. 1992.

NOTES:


1. Materials shall be as follows:
 - Nameplate : a 240 tp 304, stainless steel
 - Screw : type 304 stainless steel
 - Bracket : same material as attached parts
2. The marks, letters and portions illustrated as  shall be in relief by means of etching. the manufacturer's mark and name shall not be framed.
3. The placing location of nameplate shall be indicated in the vessel drawing.
4. Type of nameplate shall be selected by the outside diameter of vessels in mm. as follows:
 - Type I for O.D.<400
 - Type II for 400<O.D.<4000
 - Type III for O.D.>4000





NISOC

نگهداشت و افزایش تولید میدان نفتی بینک
سطح الارض و ابنیه تحت الارض
عمومی و مشترک



شماره پیمان:

053-073-9184

Standard Detail Drawing for Pressure Vessels and Heat Exchanger

شماره صفحه: ۵۶ از ۵۶

نسخه	سریال	نوع مدرک	رشته	تسهیلات	صادرکننده	بسته کاری	پروژه
D02	0001	DW	ME	000	PEDCO	GNRAL	BK

INDICATION OF NAMEPLATE

- All dimensions are in mm.
- Lettering shall be in roman vertical block type.
- Contents shall be indicated as follows:
 - Exchanger name : full name as shown in exchanger drawing.
 - Item number : designated mark and number as shown in exchanger drawing.
 - Design code : applied code title e.g. ASME VIII div. 1 , API Std. 662.
 - Post weld heat treatment : "YES" OR "NO".
 - Radiographic examination : "FULL", "SPOT" OR "NO".
 - Weights : net weight of the empty exchanger and bundle weight
 - Year built : month and year of completion e.g. oct. 1992.

NOTES:

- Materials shall be as follows:
 - Nameplate : a 240 tp 304, stainless steel
 - Screw : type 304 stainless steel
 - Bracket : same material as attached parts
- The marks, letters and portions illustrated as  shall be in relief by means of etching. the manufacturer's mark and name shall not be framed.
- The placing location of nameplate shall be indicated in the exchanger drawing.
- Type of nameplate shall be selected by the lenght (L) of exchanger in mm. as follows:
 - Type I for $L < 400$
 - Type II for $400 < L < 4000$
 - Type III for $L > 4000$

