

NOTES

- DIMENSIONS ARE IN "mm" AND ELEVATIONS IN "m" UNLESS SPECIFIED . 2- ALL DIMENSIONS AND ELEVATIONS SHALL BE CHECKED BY THE CONTRACTOR PRIOR TO CONSTRUCTION.
- 3- CONTRACTOR SHALL COMPARE ALL ARCHITECTURAL, MECHANICAL, ELECTRICAL, PIPING AND STRUCTURAL DRAWINGS AND IN CASE OF ANY CONFLICTS OR DISCREPANCY, INFORM THE ENGINEER.
- 4- SLAB ON GRADE SHALL BE CONSTRUCTED AFTER EXECUTION OF CABLE TRENCH & EQUIPMENTS FOUNDATION. 5- ALL MATERIALS ARE SELECTED FROM THE HIGHEST QUALITY AND SHALL BE APPROVED BY THE CLIENT.
- 6- FOR COORDINATE REFER TO FINISH GRADING DOCUMENTS. 7- REFERENCE COORDINATES E=1000.000 , N=1000.000 REFER TO X=442339 , Y=3287936 UTM.
- 8- FINISH GRADING LEVEL (BK15) ELEVATION: +125.00 (MEAN SEA LEVEL) $+125.05 \text{ m (GLOBAL)} = \pm 0.00 \text{ (LOCAL)}$
- 9- ALL EXTERNAL OPENINGS (WINDOWS AND DOORS) SHALL BE FIRE PROOF.
- 10- DOUBLE GLAZED WINDOW WITH 2*6mm REINFORCED GLASS AND 6mm GAS FILLED GAP.
- 11- WC DOORS SHELL BE WATERPROOF ABS TYPE WITH CLOSER MECHANISM.
- 12- KNAUF GYPSUM BOARD TILES (60*60) cm (REGULAR 9.5 mm THICKNESS) WITH (1063).


13- KNAUF PVC-COATED GYPSUM BOARD TILES (60*60)-(REGULAR 9.5mm THICKNESS) WITH (1063)-(PVC THICKNESS 0.35mm).

	LEGEND
	BRICK FACING
	BRICK WORK
	REINFORCED CONCRETE
	TERRAZZO TILE
	SUSPENDED CEILING TILES
	WATER PROOF SUSPENDED CEILING TILES
F.F.L.	FINISHED FLOOR LEVEL
T.O.G.	TOP OF GRAVEL
T.O.Wa.	TOP OF WALKWAY
T.O.P.	TOP OF PARAPET
T.O.Fou.	TOP OF FOUNDATION
T.O.D.	TOP OF DOOR
B.O.D. T.O.W.	
B.O.W.	
T.O.R.	TOP OF ROOF

T.O.D. TOP OF DOOR T.O.Ca. TOP OF CAGE B.O.Ca. BOTTOM OF CAGE

REFERENCE DRAWING	DRG. No.
STANDARD DRAWING FOR ARCHITECTURAL DETAILS	BK-GNRAL-PEDCO-000-AR-DW-0001
STANDARD DETAILS FOR LADDER & SAFETY CAGE	BK-GNRAL-PEDCO-000-ST-DW-0009
FOUNDATION DRAWING FOR SECURITY BUILDING FOR WELL PADS — BK-15	BK-BK15-PEDCO-110-ST-DW-0002
STRUCTURAL DRAWING FOR SECURITY BUILDING FOR WELL PADS - BK-15	BK-BK15-PEDCO-110-ST-DW-0003
GENERAL CIVIL LAYOUT - BK15	BK-BK15-PEDCO-110-CV-PY-0001
HVAC SYSTEM LAYOUT FOR SECURITY BUILDING - BK15	BK-BK15-PEDCO-110-HV-PY-0002
PLUMBING & SEWAGE PIPING LAYOUT FOR SECURITY BUILDING – BK15	BK-BK15-PEDCO-110-HV-PY-0004

KEY PLAN

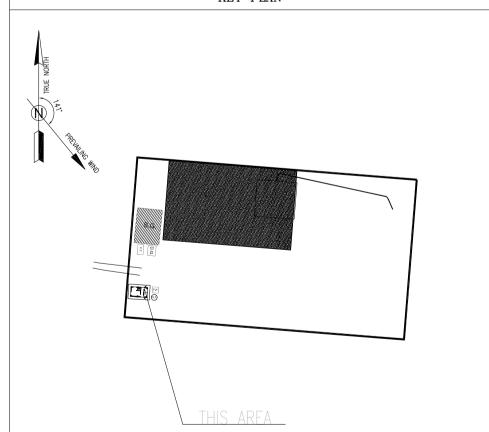

							***	******	**.**	***.***	**.**	***.***
D01	FEB.2023	IFA	R.BERLOUIE	M.FAKHARIAN	M.Mehrshad	**,**	REV.	DESCRIPTION	BY	DATE	BY	DATE
D00	APR.2022	IFC	R.BERLOUIE	M.FAKHARIAN	M.Mehrshad	**.**	REV. DESCRIPTION		CHE	CKED	REV.	APPR.
REV.	DATE	P.O.I.S	PREP.	СНК.	APP.	AUT.	اصل و کلیه نسخ این نقشه و حق اقتباس متعلق به شرکت ملی مناطق نفت خیز جنوب میباشد.					
PROJECT NAME: BINAK OILFIELD DEVELOPMENT/SUB-SURFACE WORK PACKAGES BK15 WHF MODIFICATIONS					4	THE ORIGINAL AND						

THE COPYRIGHT THEREIN ARE THE SOLE PROPERTY OF AF. N.I.S.O.C./ FIELDS PROJECT NO.: 971020

> EPD/EPC CONTRACTOR (GC): PETROIRAN DEVELOPMENT

> > COMPANY

PEDCO

BK-BK15-PEDCO-110-AR-DW-0003

EPC CONTRACTOR:

AS SHOWN A1

HIRGAN ENERGY - DESIGN & INSPECTION

BINAK OILFIELD DEVELOPMENT SUB-SURFACE WORK PACKAGES BK15 WHF MODIFICATIONS

DATE SCALE DRAWING BY CHECKED BY PROJECT ENG.

02 OF 07 D01


NO CONSTRUCTION PERMITTED UNLESS DRAWING APPROVED ARCHITECTURAL DRAWING FOR SECURITY BUILDING OF WELL PADS - BK-15 APPROVED FOR CONSTRUCTION BY: DATE: SHEET NO. REV. BUDGET REF. LOCATION SIZE CLASS SERIAL NO. SHEET REVISION SCALE SIZE DRAWING NO.

02 OF 07 | D01 | 053-073-9184 | F | 4 | B |

SPACE TAG NUMBER

- (100) SECURITY GUARD ROOM
- (101) RESTING AREA



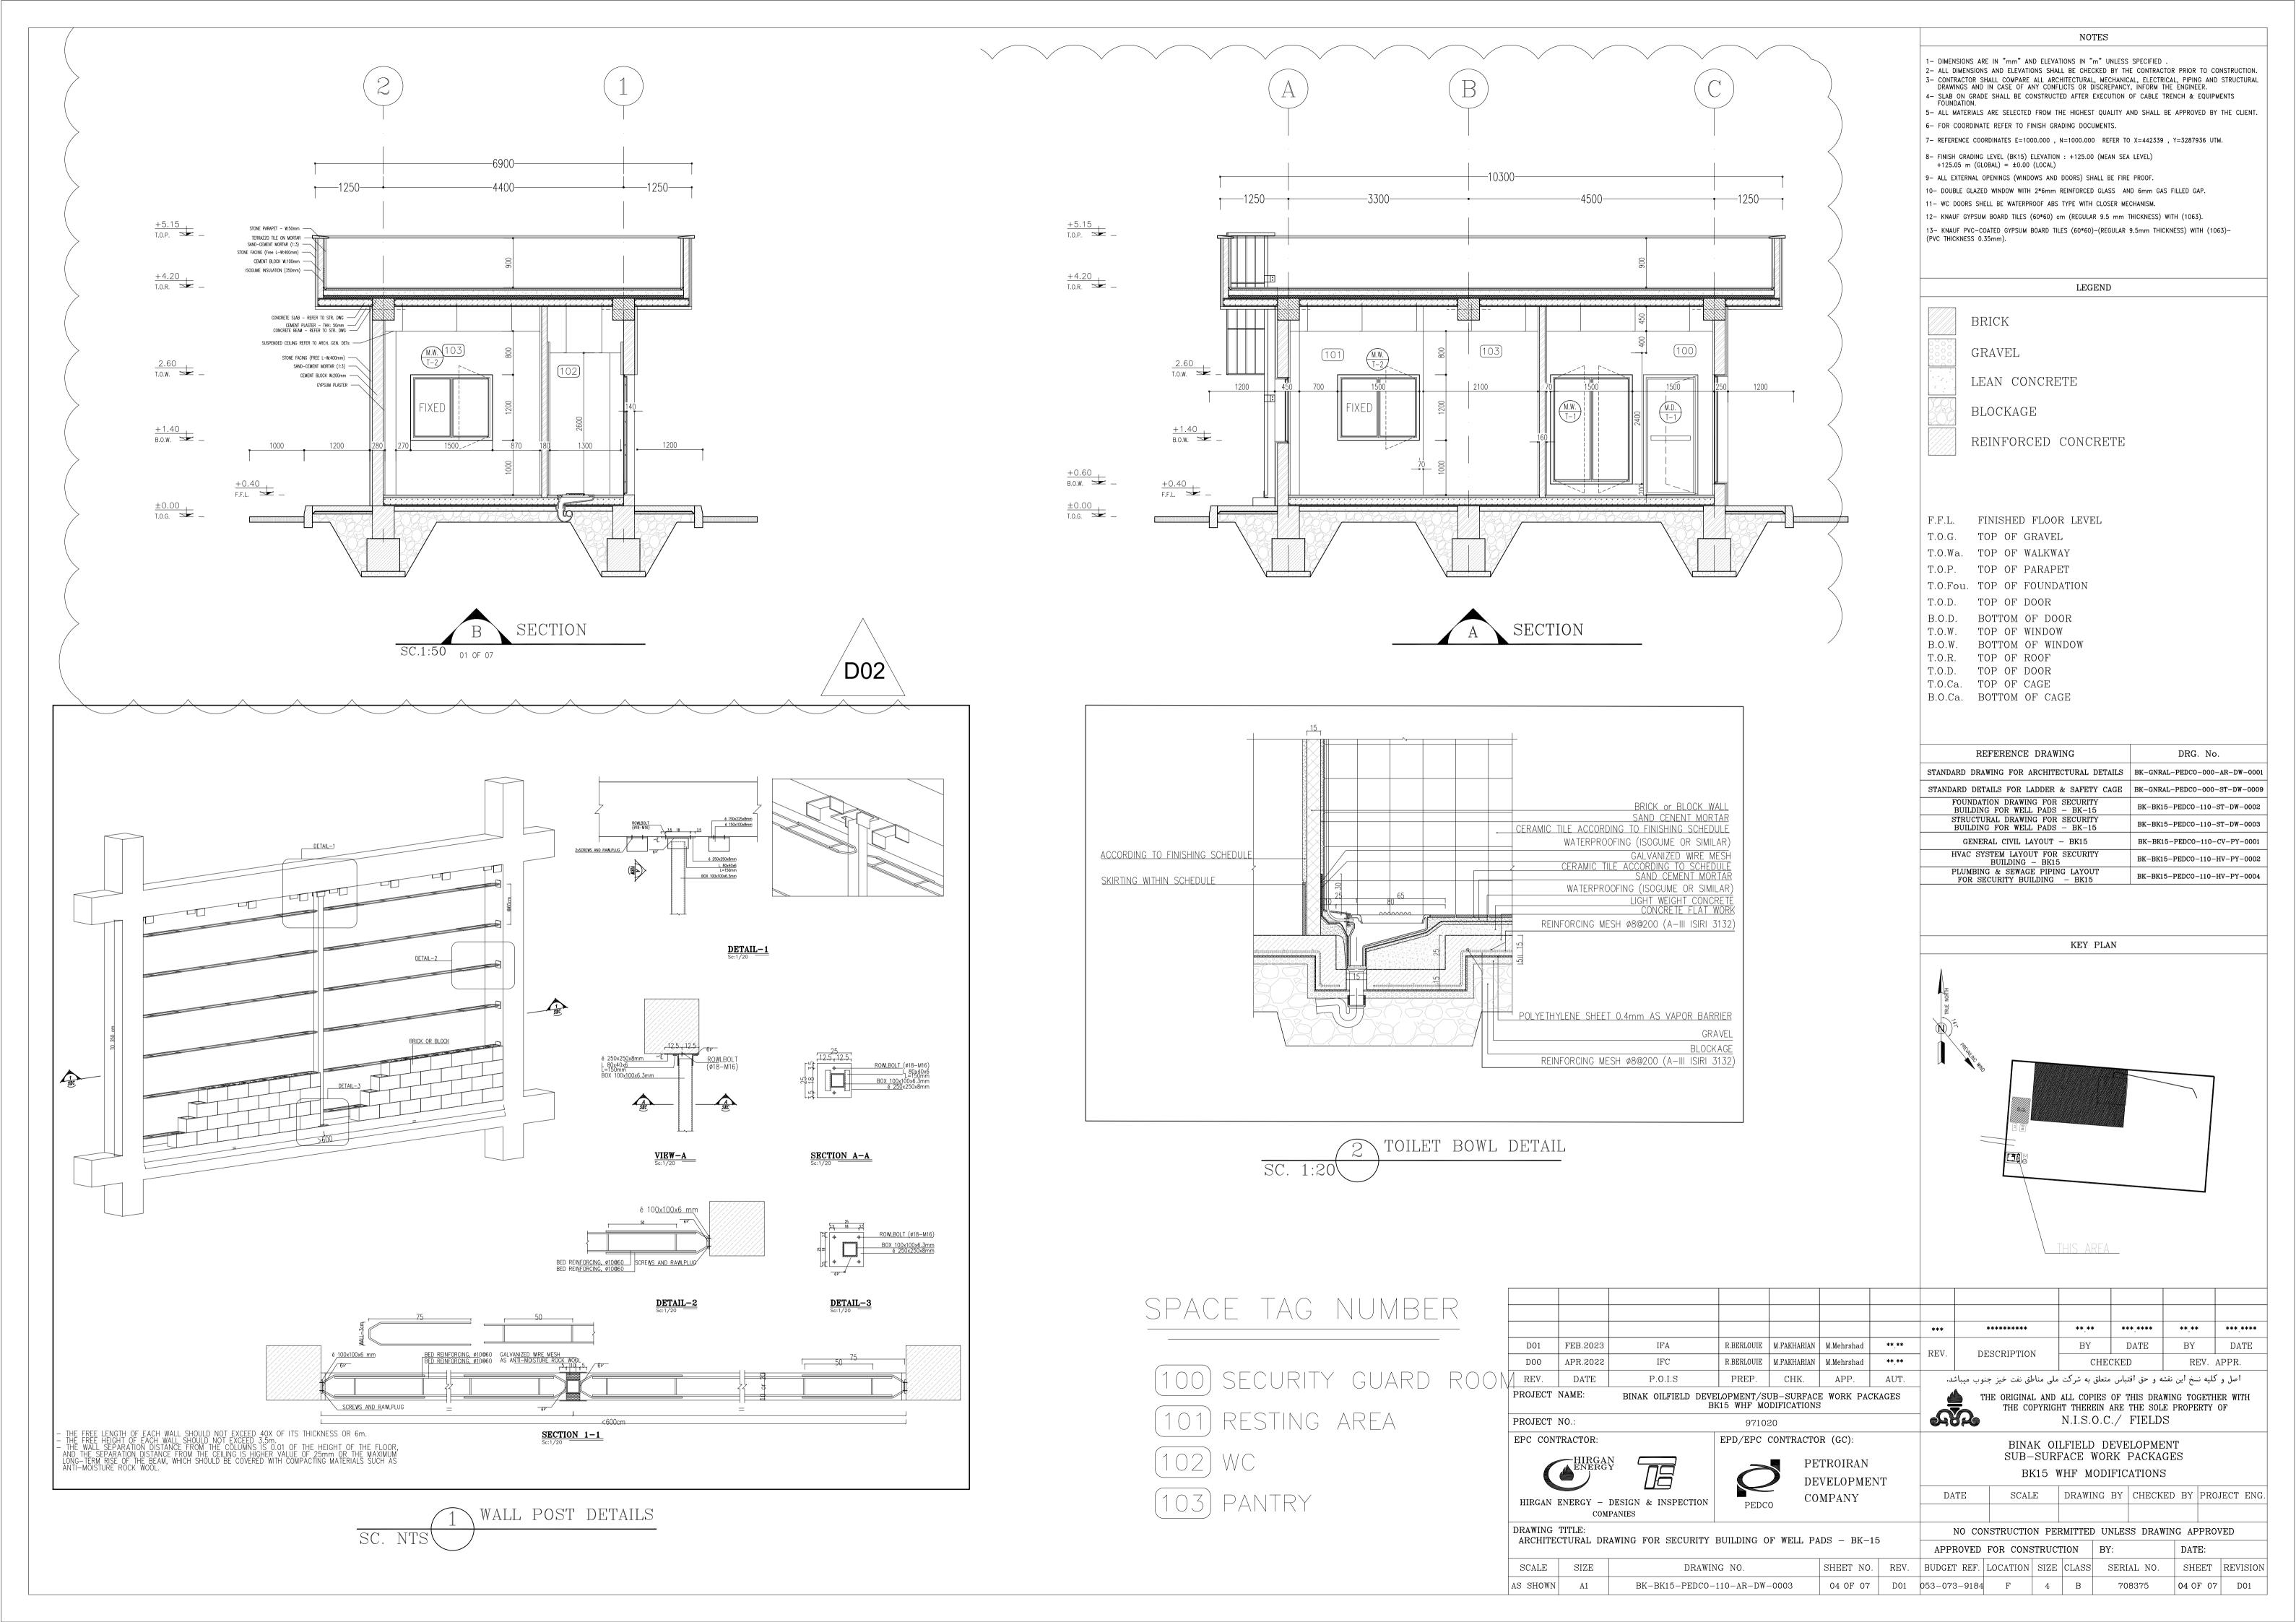

FINISHING SCHEDULE MATERIAL AREA FLOOR SKIRTING WALL CEILING DIMENSION KNAUF PLAQUE GYPSUM R A N I T E STONE PLASTER 100 SECURITY GUARD ROOM PLAQUE STONE (60×60) (H=10cm)OIL PAINT CEILING KNAUF PLAQUE GYPSUM RANITE STONE PLASTER (101)RESTING AREA (60×60) PLAQUE STONE (H=10cm)OIL PAINT CEILING GLAZED FIRST CLASS 102 IRANIAN (30×30) UP TO CERAMIC TILES CEILING +2.60GLAZED KNAUF FIRST CLASS 103 PANTRY (30×30) IRANIAN UP TO CERAMIC TILES CEILING +2.60

WINDOWS AND DOORS SILL : REFER TO WALL POST DETAIL 04/07

SANITATION: FINE GRADE CHINA FIXTURES - FOR PIPE DETAIL REFER TO PLUMBING AND SEWAGE PIPING LAYOUT

1x SQUAT TOILET + 1x HANDWASH SINK (40cmx55cm)

1x DISHWASHING SINK SINGLE-BOWL - HIGHEST GRADE STAINLESS STEEL

TRANSPARENT AREAS: DOUBLE GLAZED WINDOWS - FOR DETAIL REFER TO WINDOW SCHEDULE

SECURITY GUARD ROOM: 4x FULL HEIGHT, DOUBLE OPENING 200cm*150cm WINDOWS RESTING AREA: 2x NORMAL SIZE, LEFT OPENING 120cm*150cm WINDOWS

FINISHING SCHEDULE

150 5 140 5 FIXED		20 20 54 16.6, 44 16.6, 54 15 17 18 19 19 10 10 10 10 10 10 10 10 10 10	20 54 16.6, 44 16.6, 54 15, 6.0 9.0 9.0 9.0 9.0 9.0 9.0 9.0 9.0 9.0 9	BASED ON VENDORS DATA PANIC BAR
$\begin{array}{c c} \hline \\ \hline $	M.W. T-1 No.: 4	AL.D. T-2 No.: 1	AL.D. T-1 No.: 1	M.D. T-1 No.: 2

RH.: 1

DOORS AND WINDOWS TYPES

RH.: 1

RH. : 1

LH. : 1

AL.D T.1	ALUMINUM DOOR - 90cm (W) * 220cm (H)
AL.D T.2	ALUMINUM DOOR - 80cm (W) * 220cm (H)
M.D T.1	METAL DOOR - 100cm (W) * 220cm (H)

M.W T.1	METAL WINDOW - 150cm (W) * 120cm (H)
M.W T.2	METAL WINDOW - 150cm (W) * 200cm (H)

GLASS TYPE: DOUBLE-GLAZED (2*4mm + 16mm gap)

SCALE SIZE

AS SHOWN A1

NOTES

2- ALL DIMENSIONS AND ELEVATIONS SHALL BE CHECKED BY THE CONTRACTOR PRIOR TO CONSTRUCTION. 3- CONTRACTOR SHALL COMPARE ALL ARCHITECTURAL, MECHANICAL, ELECTRICAL, PIPING AND STRUCTURAL DRAWINGS AND IN CASE OF ANY CONFLICTS OR DISCREPANCY, INFORM THE ENGINEER.

4- SLAB ON GRADE SHALL BE CONSTRUCTED AFTER EXECUTION OF CABLE TRENCH & EQUIPMENTS FOUNDATION. 5- ALL MATERIALS ARE SELECTED FROM THE HIGHEST QUALITY AND SHALL BE APPROVED BY THE CLIENT.

7- REFERENCE COORDINATES E=1000.000 , N=1000.000 REFER TO X=442339 , Y=3287936 UTM.

10- DOUBLE GLAZED WINDOW WITH 2*6mm REINFORCED GLASS AND 6mm GAS FILLED GAP.

12- KNAUF GYPSUM BOARD TILES (60*60) cm (REGULAR 9.5 mm THICKNESS) WITH (1063).

13- KNAUF PVC-COATED GYPSUM BOARD TILES (60*60)-(REGULAR 9.5mm THICKNESS) WITH (1063)-

LEGEND

- DIMENSIONS ARE IN "mm" AND ELEVATIONS IN "m" UNLESS SPECIFIED .

6- FOR COORDINATE REFER TO FINISH GRADING DOCUMENTS.

 $+125.05 \text{ m (GLOBAL)} = \pm 0.00 \text{ (LOCAL)}$

(PVC THICKNESS 0.35mm).

8- FINISH GRADING LEVEL (BK15) ELEVATION: +125.00 (MEAN SEA LEVEL)

9- ALL EXTERNAL OPENINGS (WINDOWS AND DOORS) SHALL BE FIRE PROOF.

11- WC DOORS SHELL BE WATERPROOF ABS TYPE WITH CLOSER MECHANISM.

F.F.L.	FINISHED FLOOR LEVEL
T.O.G.	TOP OF GRAVEL
T.O.Wa.	TOP OF WALKWAY
T.O.P.	TOP OF PARAPET
T.O.Fou.	TOP OF FOUNDATION
T.O.D.	TOP OF DOOR
B.O.D.	BOTTOM OF DOOR
T.O.W.	TOP OF WINDOW
B.O.W.	BOTTOM OF WINDOW
T.O.R.	TOP OF ROOF
T.O.D.	TOP OF DOOR
T.O.Ca.	TOP OF CAGE

B.O.Ca. BOTTOM OF CAGE

REFERENCE DRAWING	DRG. No.
STANDARD DRAWING FOR ARCHITECTURAL DETAILS	BK-GNRAL-PEDCO-000-AR-DW-0001
STANDARD DETAILS FOR LADDER & SAFETY CAGE	BK-GNRAL-PEDCO-000-ST-DW-0009
FOUNDATION DRAWING FOR SECURITY BUILDING FOR WELL PADS - BK-15	BK-BK15-PEDCO-110-ST-DW-0002
STRUCTURAL DRAWING FOR SECURITY BUILDING FOR WELL PADS - BK-15	BK-BK15-PEDCO-110-ST-DW-0003
GENERAL CIVIL LAYOUT - BK15	BK-BK15-PEDCO-110-CV-PY-0001
HVAC SYSTEM LAYOUT FOR SECURITY BUILDING - BK15	BK-BK15-PEDCO-110-HV-PY-0002
PLUMBING & SEWAGE PIPING LAYOUT FOR SECURITY BUILDING - BK15	BK-BK15-PEDCO-110-HV-PY-0004

KEY PLAN	
THIS AREA	

THE COPYRIGHT THEREIN ARE THE SOLE PROPERTY OF N.I.S.O.C./ FIELDS

DATE:

05 OF 07 D01

BINAK OILFIELD DEVELOPMENT

SUB-SURFACE WORK PACKAGES

SHEET NO. REV. BUDGET REF. LOCATION SIZE CLASS SERIAL NO. SHEET REVISION

05 OF 07 | D01 | 053-073-9184 | F | 4 | B


							***	******	**.**	***.***	**.**	*** ***
D01	FEB.2023	IFA	R.BERLOUIE	M.FAKHARIAN	M.Mehrshad	**.**	REV.	DESCRIPTION	BY	DATE	BY	DATE
D00	APR.2022	IFC	R.BERLOUIE	M.FAKHARIAN	M.Mehrshad	**.**	REV.	DESCRIPTION	CHE	CKED	REV.	APPR.
REV.	DATE	P.O.I.S	PREP.	СНК.	APP.	AUT.	اصل و كليه نسخ اين نقشه و حق اقتباس متعلق به شركت ملى مناطق نفت خيز جنوب ميباشد.					اصل و ک
PROJECT NAME: BINAK OILFIELD DEVELOPMENT/SUB-SURFACE WORK PACKAGES						THE ORIGINAL AND	ALL COPIES	OF THIS DRA	WING TOGETH	IER WITH		


BINAK OILFIELD DEVELOPMENT/SUB-SURFACE WORK PACKAGES
BK15 WHF MODIFICATIONS PROJECT NO.: 971020 EPC CONTRACTOR: EPD/EPC CONTRACTOR (GC): PETROIRAN DEVELOPMENT


DRAWING NO.

BK-BK15-PEDCO-110-AR-DW-0003


BK15 WHF MODIFICATIONS SCALE DRAWING BY CHECKED BY PROJECT ENG. COMPANY HIRGAN ENERGY - DESIGN & INSPECTION NO CONSTRUCTION PERMITTED UNLESS DRAWING APPROVED ARCHITECTURAL DRAWING FOR SECURITY BUILDING OF WELL PADS - BK-15 APPROVED FOR CONSTRUCTION BY: FINISHING, WINDOW AND DOOR TABLES

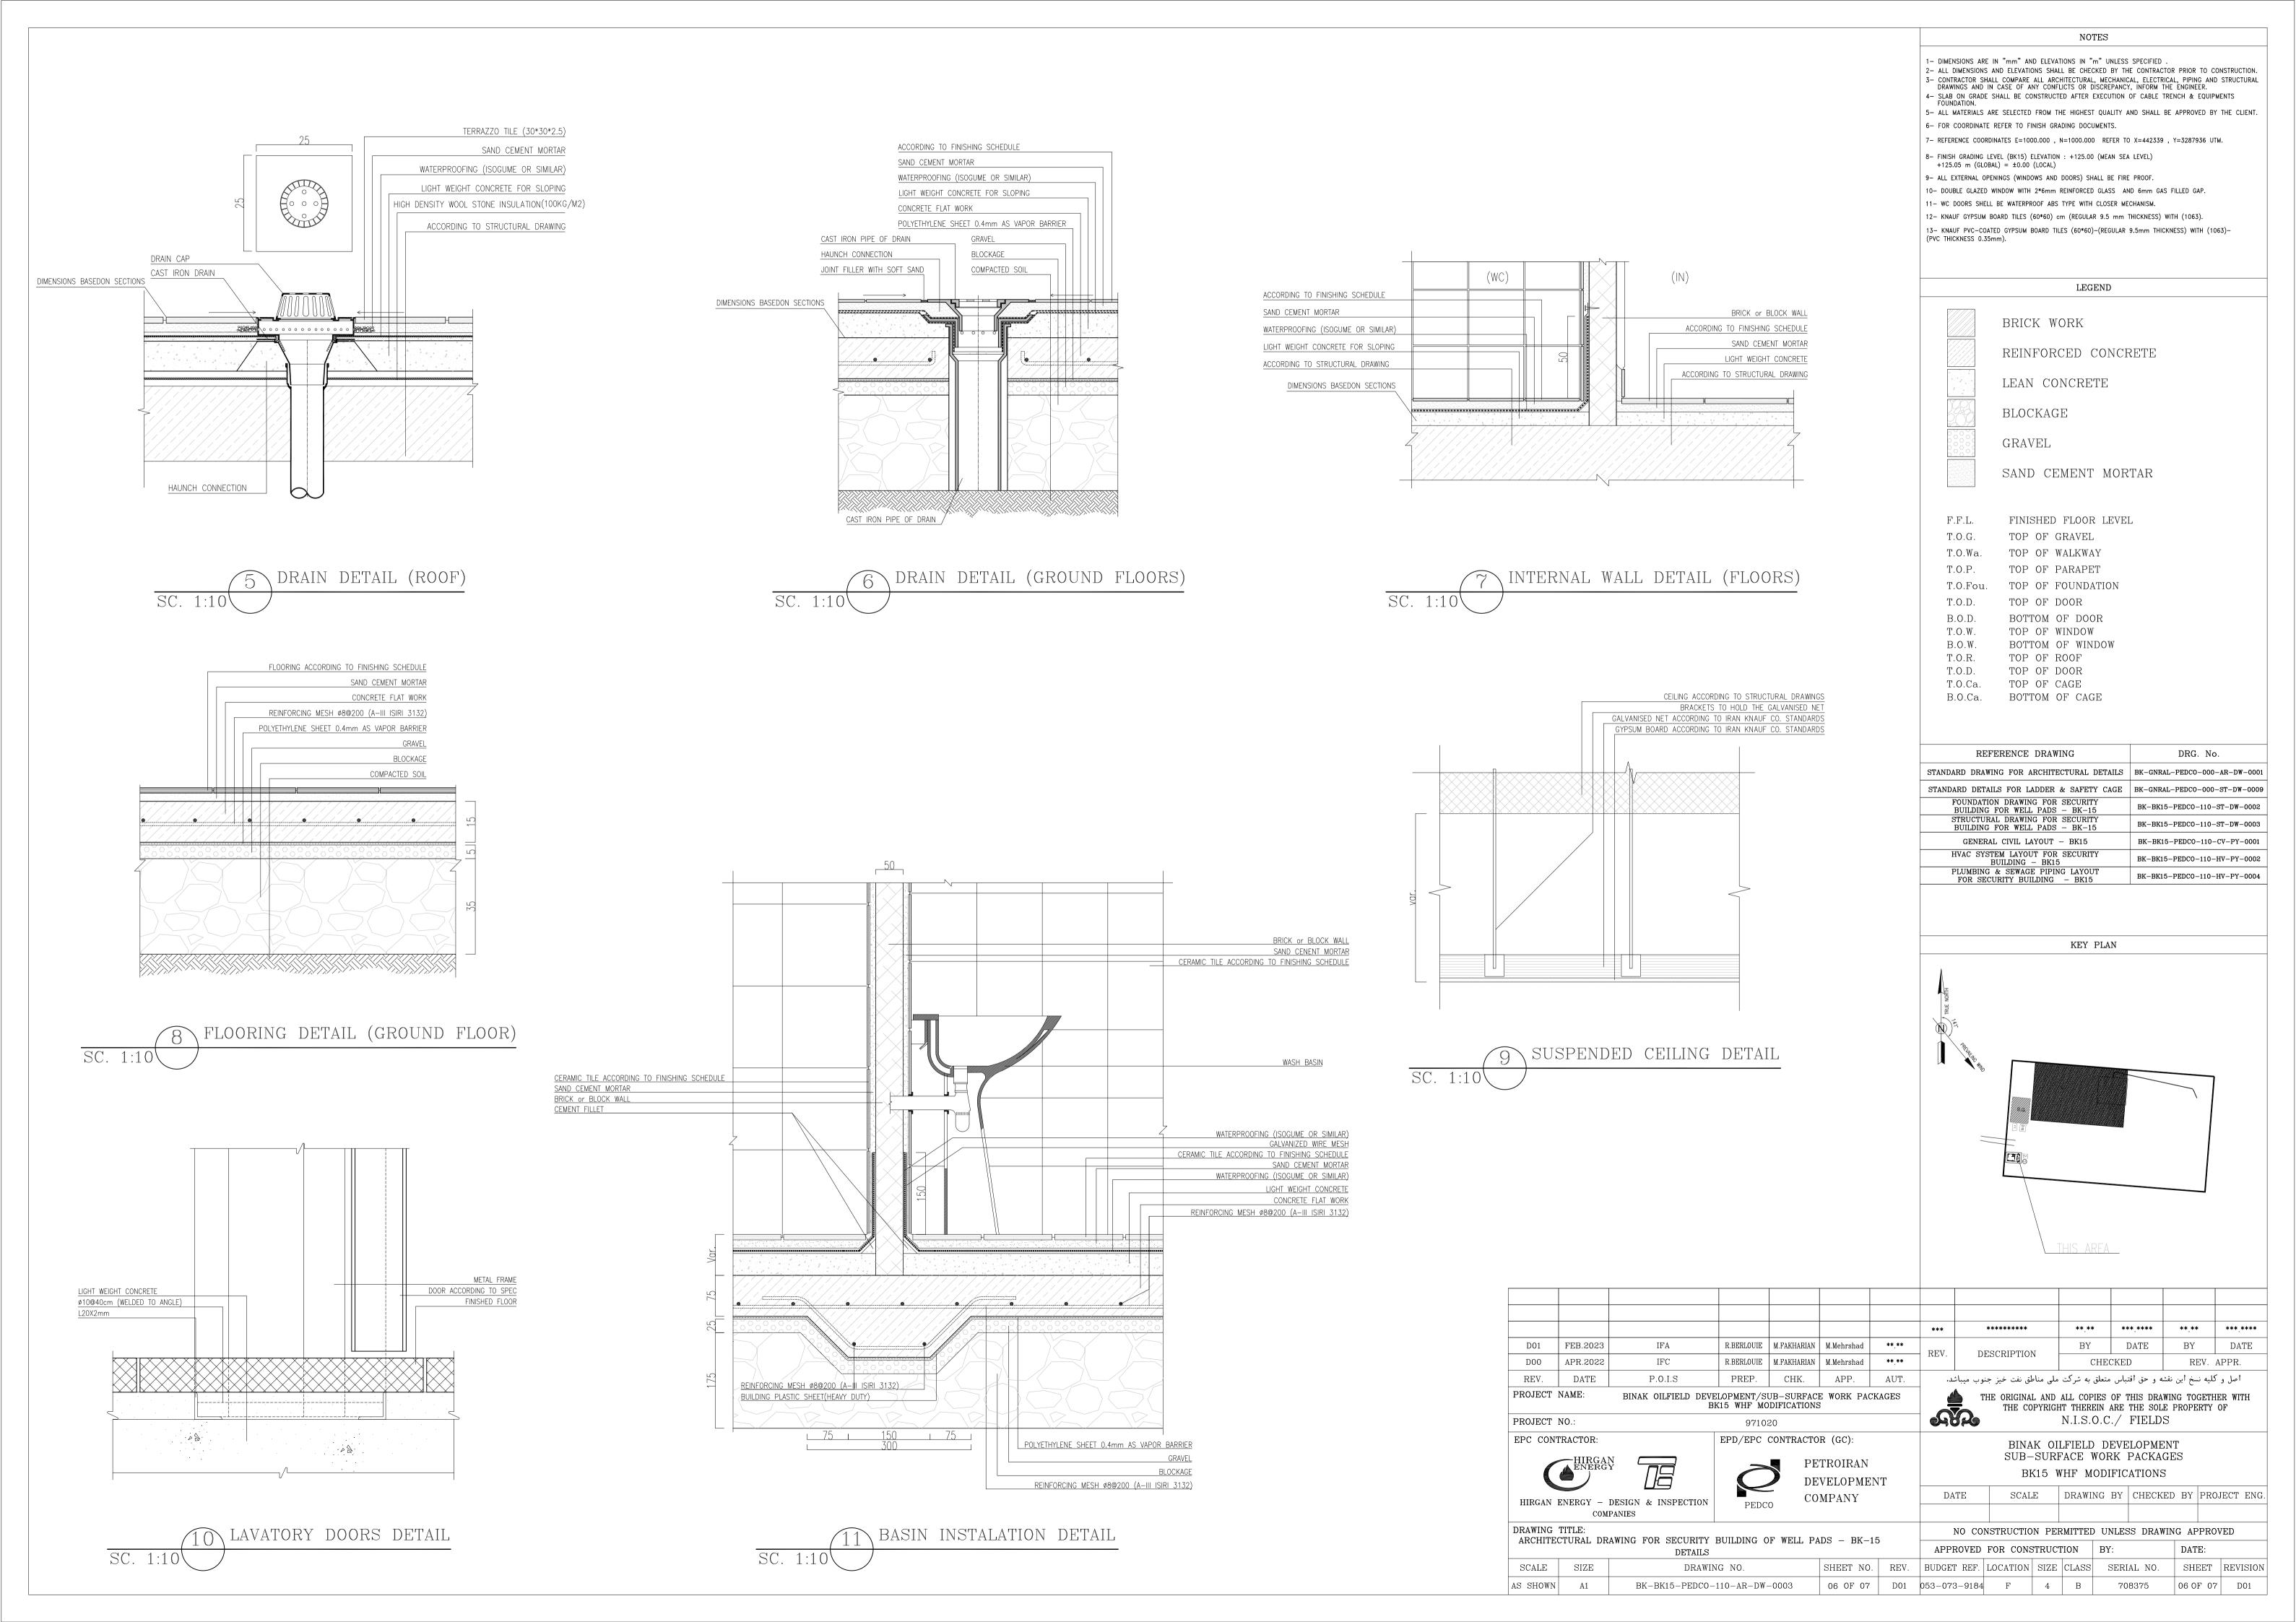

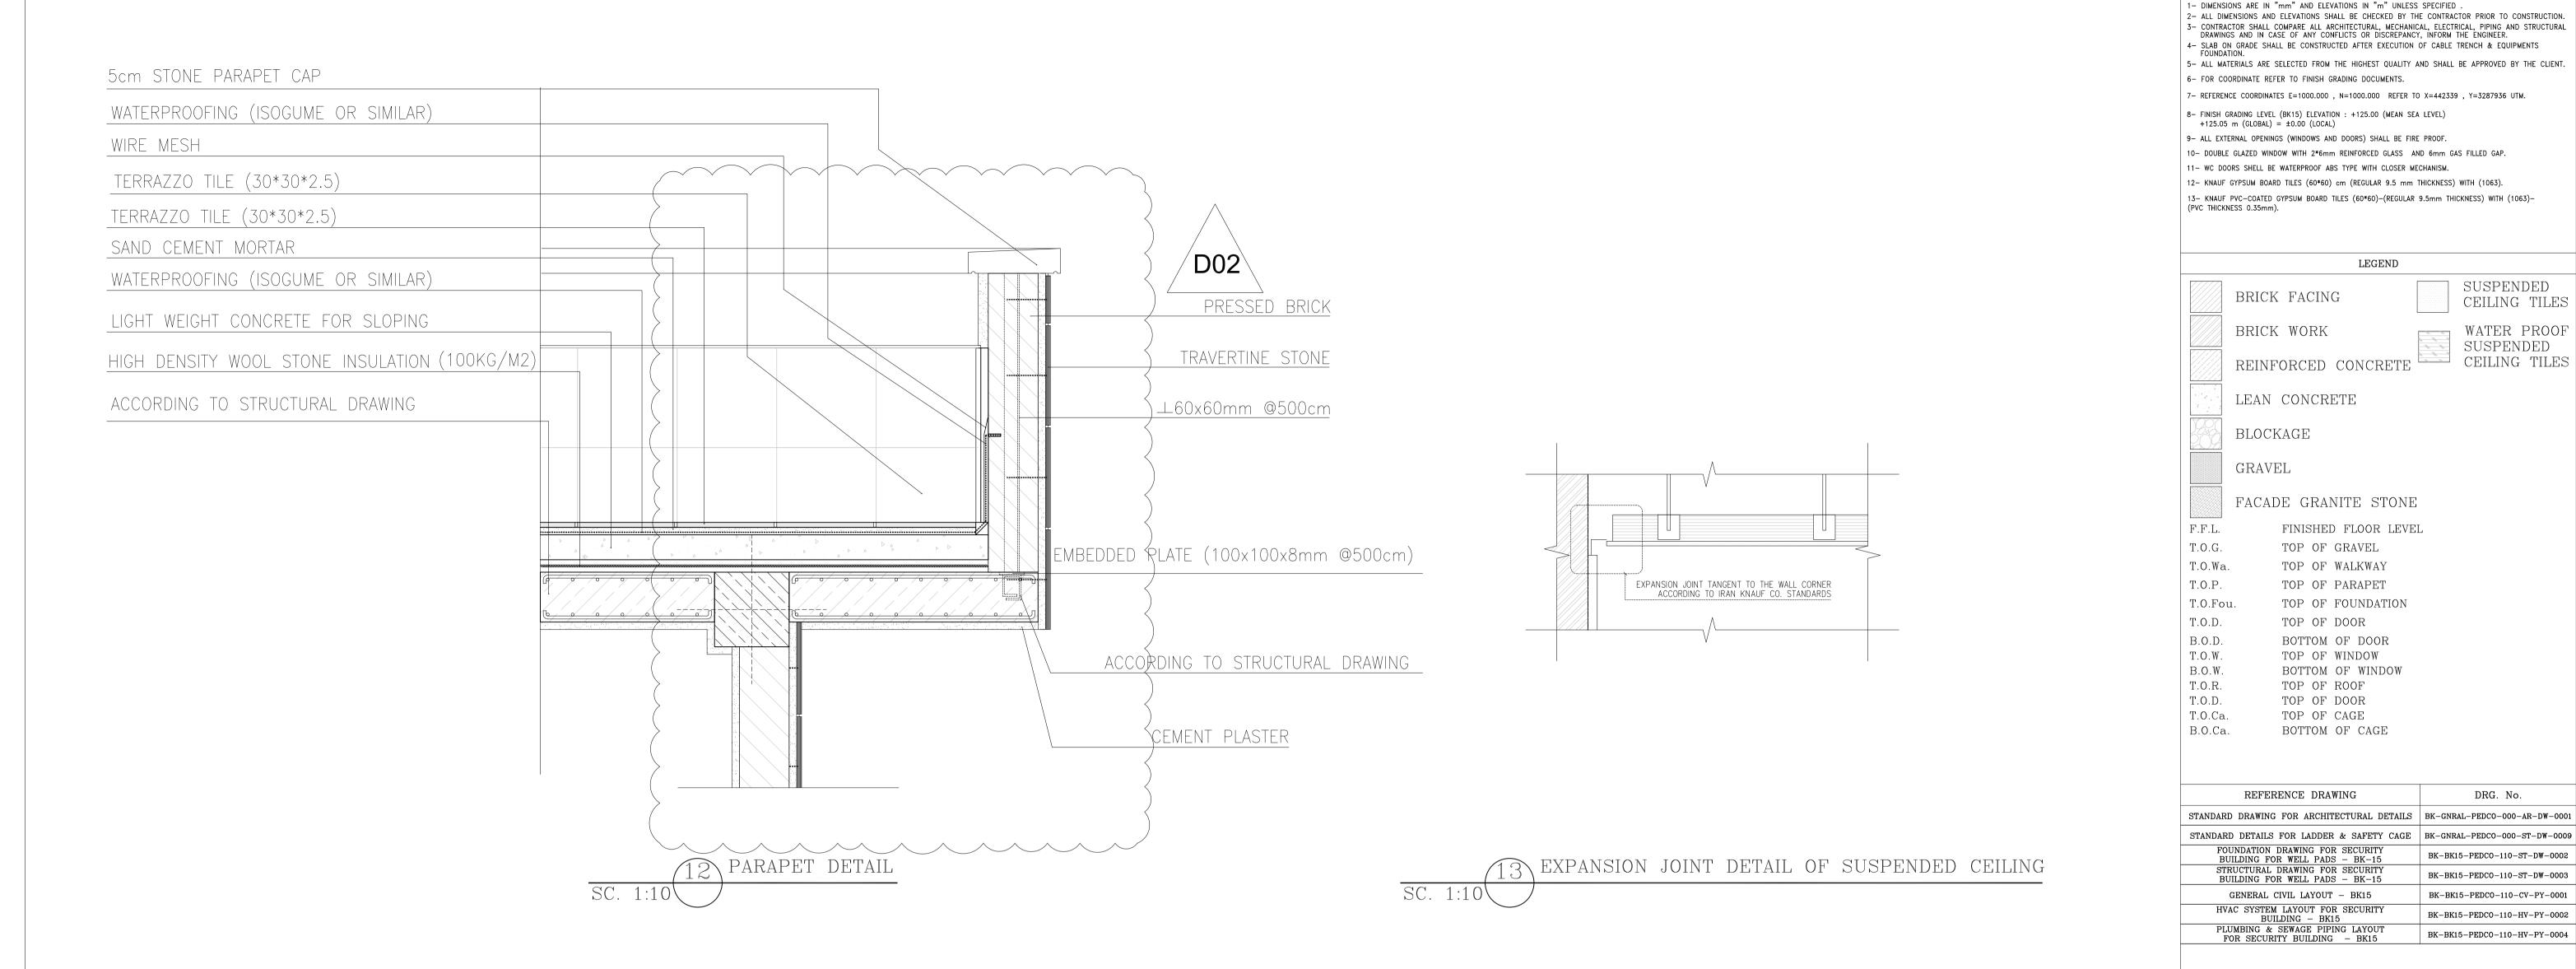

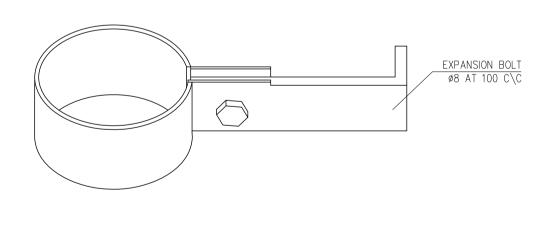

14 TYPICAL PIPE CLIP ON TRAPEZOIDAL SHEET

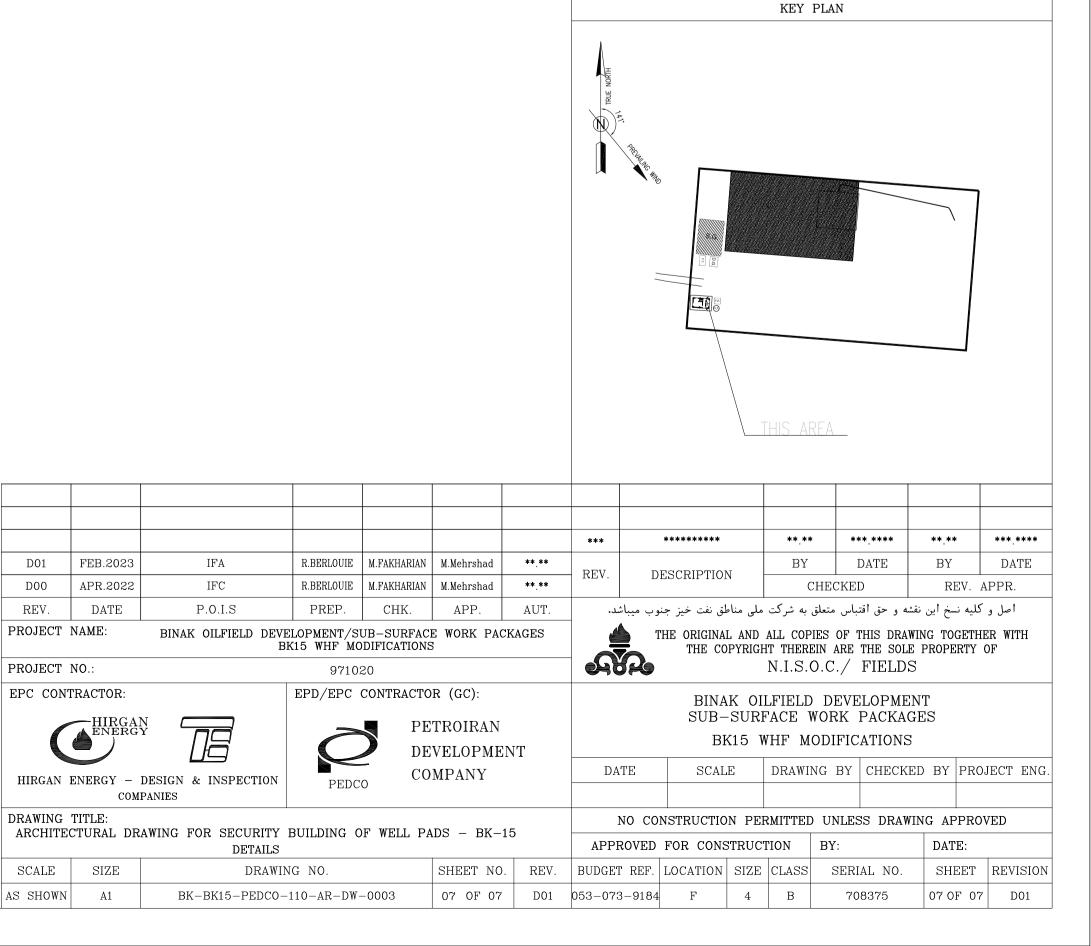

NOTES

LEGEND

BRICK FACING

BRICK WORK

LEAN CONCRETE

BLOCKAGE

GRAVEL

REINFORCED CONCRETE

FACADE GRANITE STONE

TOP OF GRAVEL

TOP OF WALKWAY

TOP OF PARAPET

BOTTOM OF DOOR

BOTTOM OF WINDOW

TOP OF WINDOW

TOP OF DOOR

TOP OF ROOF

TOP OF DOOR

TOP OF CAGE

REFERENCE DRAWING

FOUNDATION DRAWING FOR SECURITY

BUILDING FOR WELL PADS - BK-15 STRUCTURAL DRAWING FOR SECURITY

BUILDING FOR WELL PADS - BK-1

GENERAL CIVIL LAYOUT - BK15

HVAC SYSTEM LAYOUT FOR SECURITY

BUILDING - BK15
PLUMBING & SEWAGE PIPING LAYOUT
FOR SECURITY BUILDING - BK15

BOTTOM OF CAGE

TOP OF FOUNDATION

FINISHED FLOOR LEVEL

SUSPENDED

CEILING TILES

WATER PROOF

CEILING TILES

SUSPENDED

DRG. No.

BK-BK15-PEDCO-110-ST-DW-0002

BK-BK15-PEDCO-110-ST-DW-0003

BK-BK15-PEDCO-110-CV-PY-0001

BK-BK15-PEDCO-110-HV-PY-0002

BK-BK15-PEDCO-110-HV-PY-0004

- DIMENSIONS ARE IN "mm" AND ELEVATIONS IN "m" UNLESS SPECIFIED