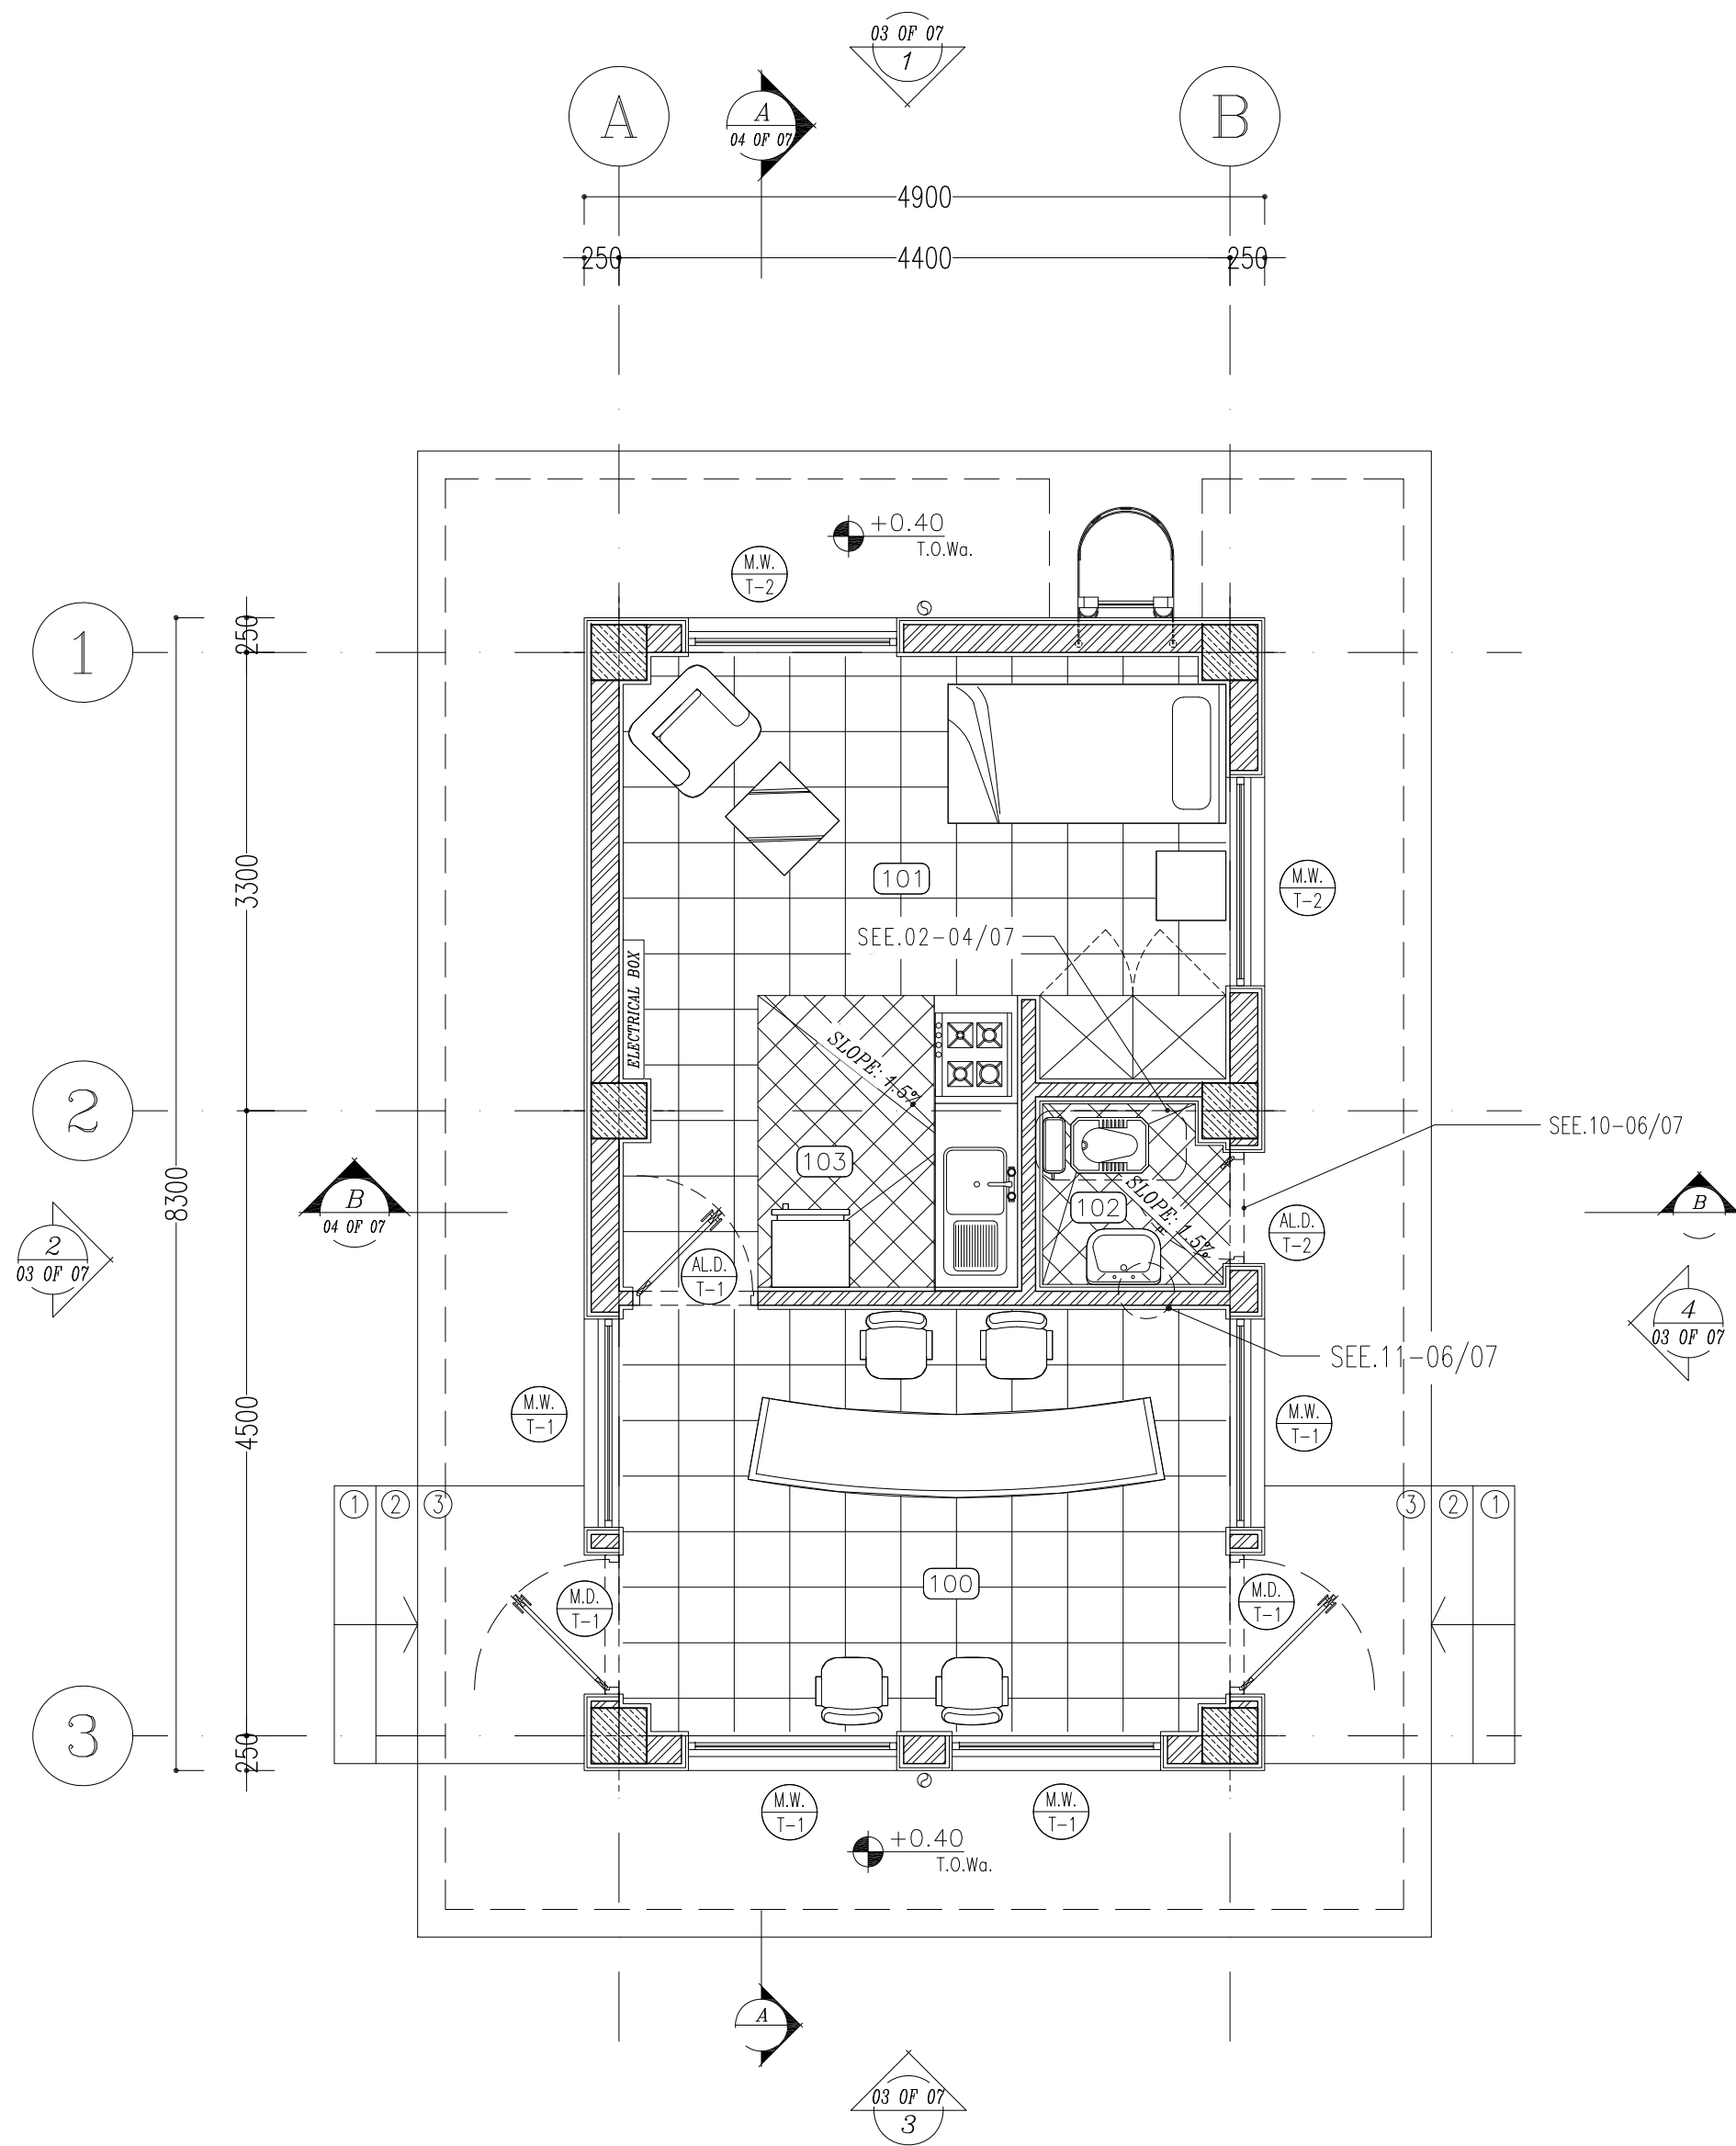






D02

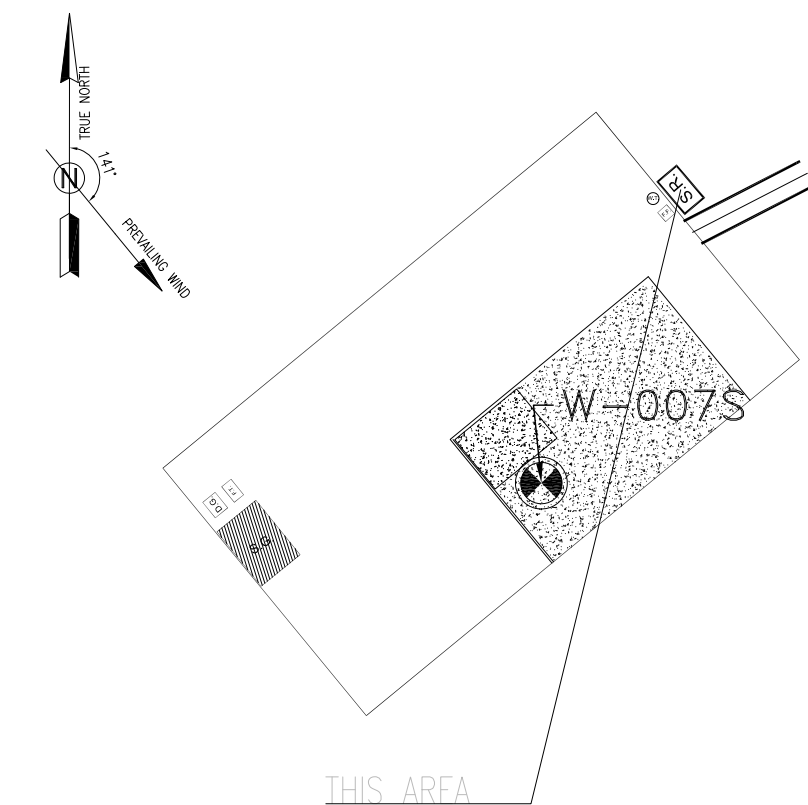


SC.1:50 2 FURNITURE & FLOORING PLAN

LEGEND	
	BRICK
	REINFORCED CONCRETE
	STONE (60x60)
	CERAMIC TILES (30x30)
F.F.L.	FINISHED FLOOR LEVEL
T.O.G.	TOP OF GRAVEL
T.O.Wa.	TOP OF WALKWAY
T.O.P.	TOP OF PARAPET
T.O.Fou.	TOP OF FOUNDATION
T.O.D.	TOP OF DOOR
B.O.D.	BOTTOM OF DOOR
T.O.W.	TOP OF WINDOW
B.O.W.	BOTTOM OF WINDOW
T.O.R.	TOP OF ROOF
T.O.D.	TOP OF DOOR
T.O.Ca.	TOP OF CAGE
B.O.Ca.	BOTTOM OF CAGE

REFERENCE DRAWING	DRG. No.
STANDARD DRAWING FOR ARCHITECTURAL DETAILS	BK-GNRAL-PRCEO-000-AR-DW-0001
STANDARD DETAILS FOR LADDER & SAFETY CAGE	BK-GNRAI-PRCEO-000-ST-DW-0009
PLOT PLAN DRAWING - W007S	BK-W007S-PRCEO-110-PI-PY-0002
FOUNDATION DRAWING FOR SECURITY BUILDING FOR WELL PADS - W007S	BK-W007S-PRCEO-110-ST-DW-0008
STRUCTURAL DRAWING FOR SECURITY BUILDING FOR WELL PADS - W007S	BK-W007S-PRCEO-110-ST-DW-0009
HVAC SYSTEM LAYOUT FOR SECURITY BUILDING - W007S	BK-W007S-PRCEO-110-HV-PY-0002
PLUMBING & SEWAGE PIPING LAYOUT FOR SECURITY BUILDING - W007S	BK-W007S-PRCEO-110-HV-PY-0004
LIGHTING & SMALL POWER LAYOUT FOR SECURITY BUILDING - W007S	BK-SSGRG-PRCEO-110-EL-PY-0005

KEY PLAN



100 SECURITY GUARD ROOM
101 RESTING AREA
102 WC
103 PANTRY






[illegible]



NOTES

- 1- DIMENSIONS ARE IN "mm" AND ELEVATIONS IN "m" UNLESS SPECIFIED.
- 2- ALL DIMENSIONS AND ELEVATIONS SHALL BE CHECKED BY THE CONTRACTOR PRIOR TO CONSTRUCTION
- 3- CONTRACTOR SHALL COMPARE ALL ARCHITECTURAL, MECHANICAL, ELECTRICAL, PIPING AND STRUCTURAL DRAWINGS AND IN CASE OF ANY CONFLICTS OR DISCREPANCY, INFORM THE ENGINEER.
- 4- SLAB ON GRADE SHALL BE CONSTRUCTED AFTER EXECUTION OF CATCH TRENCH & EQUIPMENTS FOUNDATION.
- 5- ALL MATERIALS ARE SELECTED FROM THE HIGHEST QUALITY AND SHALL BE APPROVED BY THE CLIENT.
- 6- FOR COORDINATE REFER TO FINISH GRADING DOCUMENTS.
- 7- REFERENCE COORDINATES E=1000.00, N=1000.00 REFER TO X=437425, Y=3290543 UTM.
- 8- FINISH GRADING LEVEL (W0075) ELEVATION : +26.00 (MEAN SEA LEVEL)
+26.05 m (GLOBAL) = ±0.00 (LOCAL)
- 9- ALL EXTERNAL OPENINGS (WINDOWS AND DOORS) SHALL BE FIRE PROOF.
- 10- DOUBLE GLAZED WINDOW WITH 2*6mm REINFORCED GLASS AND 6mm GAS FILLED GAP.
- 11- WC DOORS SHALL BE WATERPROOF ABS TYPE WITH CLOSURE MECHANISM.
- 12- KNAUF GYPSUM BOARD TILES (60*60 cm) (REGULAR 9.5 mm THICKNESS) WITH (1063).
- 13- KNAUF PMVC OCEANIC GYPSUM BOARD TILES (60*60) (REGULAR 9.5mm THICKNESS) WITH (1063)-
(PMVC THICKNESS 0.35mm).

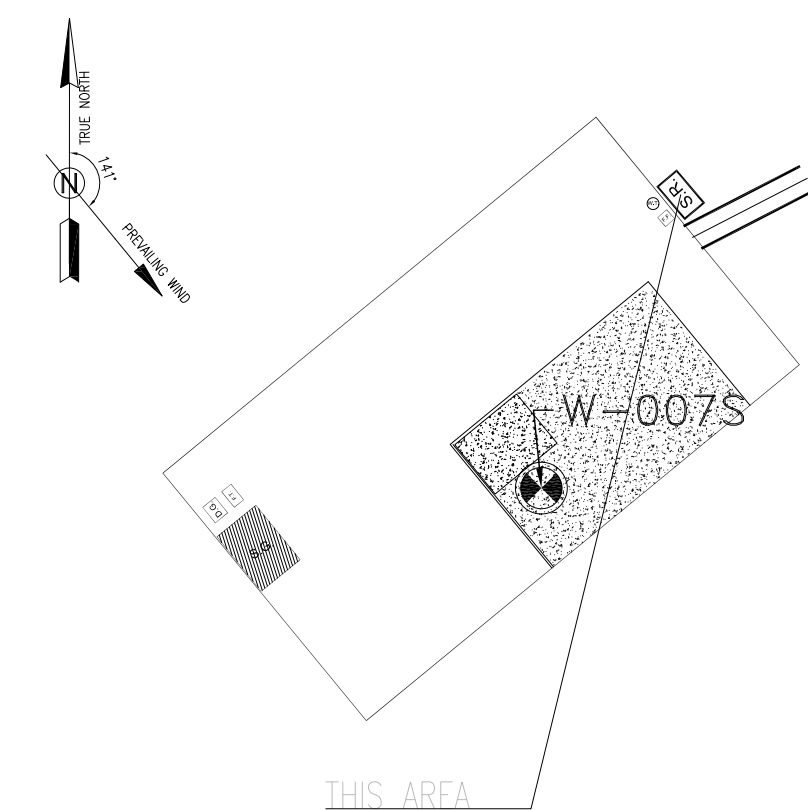
LEGEND



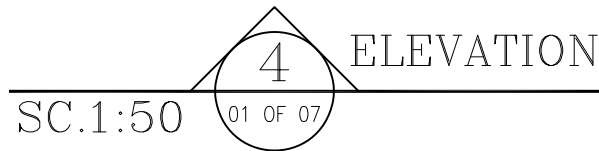
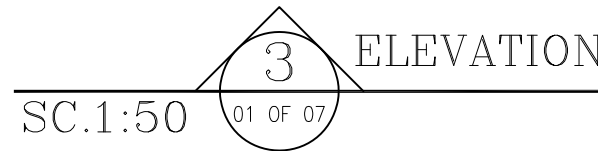
	BRICK
	REINFORCED CONCRETE
	TERRAZZO TILE
	SUSPENDED CEILING TILES
	WATER PROOF SUSPENDED CEILING TILES

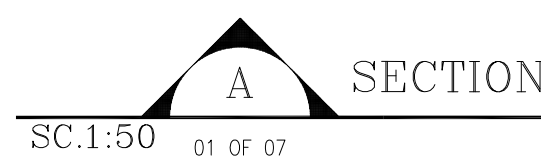
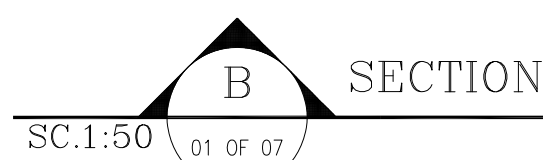
F.F.L.	FINISHED FLOOR LEVEL
T.O.G.	TOP OF GRAVEL
T.O.Wa.	TOP OF WALKWAY
T.O.P.	TOP OF PARAPET
T.O.Fou.	TOP OF FOUNDATION
T.O.D.	TOP OF DOOR
B.O.D.	BOTTOM OF DOOR
T.O.W.	TOP OF WINDOW
B.O.W.	BOTTOM OF WINDOW
T.O.R.	TOP OF ROOF
T.O.D.	TOP OF DOOR
T.O.Ca.	TOP OF CAGE
B.O.Ca.	BOTTOM OF CAGE

REFERENCE DRAWING	DRG. No.
STANDARD DRAWING FOR ARCHITECTURAL DETAILS	BK-GNRAL-PRCEO-000-AR-DW-0001
STANDARD DETAILS FOR LADDER & SAFETY CAGE	BK-GNRAI-PRCEO-000-ST-DW-0009
PLOT PLAN DRAWING - W007S	BK-W007S-PRCEO-110-PI-PY-0002
FOUNDATION DRAWING FOR SECURITY BUILDING FOR WELL PADS - W007S	BK-W007S-PRCEO-110-ST-DW-0008
STRUCTURAL DRAWING FOR SECURITY BUILDING FOR WELL PADS - W007S	BK-W007S-PRCEO-110-ST-DW-0009
HVAC SYSTEM LAYOUT FOR SECURITY BUILDING - W007S	BK-W007S-PRCEO-110-HV-PY-0002
PLUMBING & SEWAGE PIPING LAYOUT FOR SECURITY BUILDING - W007S	BK-W007S-PRCEO-110-HV-PY-0004
LIGHTING & SMALL POWER LAYOUT FOR SECURITY BUILDING - W007S	BK-SSGRG-PRCEO-110-EL-PY-0005

KEY PLAN

[illegible]

[illegible]

[illegible]

FINISHING SCHEDULE						
	AREA	FLOOR	MATERIAL DIMENSION	SKIRTING	WALL	CEILING
(100)	SECURITY GUARD ROOM	GRANITE PLAQUE STONE	(60×60)	PLAQUE STONE (H=10cm)	GYPSUM PLASTER + OIL PAINT	KAUAF SUSPENDED CEILING
(101)	RESTING AREA	GRANITE PLAQUE STONE	(60×60)	PLAQUE STONE (H=10cm)	GYPSUM PLASTER + OIL PAINT	KAUAF SUSPENDED CEILING
(102)	WC	FIRST CLASS IRANIAN CERAMIC TILES	(30×30)		GLAZED TILE 25*30 UP TO +2.60	KAUAF SUSPENDED CEILING
(103)	PANTRY	FIRST CLASS IRANIAN CERAMIC TILES	(30×30)		GLAZED TILE 25*30 UP TO +2.60	KAUAF SUSPENDED CEILING

WINDOWS AND DOORS SILL : REFER TO WALL POST DETAIL 04/07
<p>SANITATION : FINE GRADE CHINA FIXTURES – FOR PIPE DETAIL REFER TO PLUMBING AND SEWAGE PIPING LAYOUT</p> <p>1x SQUAT TOILET + 1x HANDWASH SINK (40cmx55cm)</p> <p>1x DISHWASHING SINK SINGLE–BOWL – HIGHEST GRADE STAINLESS STEEL</p>
<p>TRANSPARENT AREAS: DOUBLE GLAZED WINDOWS – FOR DETAIL REFER TO WINDOW SCHEDULE</p> <p>SECURITY GUARD ROOM : 4x FULL HEIGHT, DOUBLE OPENING 200cm*150cm WINDOWS</p> <p>RESTING AREA : 2x NORMAL SIZE, LEFT OPENING 120cm*150cm WINDOWS</p>

1x DISHWASHING SINK SINGLE-BOWL - HIGHEST GRADE STAINLESS STEEL

SECURITY GUARD ROOM : 4x FULL HEIGHT, DOUBLE OPENING 200cm*150cm WINDOWS

RESTING AREA : 2x NORMAL SIZE, LEFT OPENING 120cm*150cm WINDOWS

3 FINISHING SCHEDULE




M.W. - T.2	METAL WINDOW - 150cm (W) * 200cm (H)
------------	--------------------------------------

GLASS TYPE: DOUBLE-GLAZED (2*4mm + 16mm gap)

4

DOORS AND WINDOWS TYPES



D02

NOTES







- 1- DIMENSIONS ARE IN "mm" AND ELEVATIONS IN "m" UNLESS SPECIFIED.
- 2- ALL DIMENSIONS AND ELEVATIONS SHALL BE CHECKED BY THE CONTRACTOR PRIOR TO CONSTRUCTION
- 3- CONTRACTOR SHALL COMPARE ALL ARCHITECTURAL, MECHANICAL, ELECTRICAL, PIPING AND STRUCTURAL DRAWINGS, AND IN CASE OF ANY CONFLICTS OR DISCREPANCY, INFORM THE ENGINEER.
- 4- SLAB ON GRADE SHALL BE CONSTRUCTED AFTER EXECUTION OF CABLE TRUNK & EQUIPMENTS FOUNDATION.
- 5- ALL MATERIALS ARE SELECTED FROM THE HIGHEST QUALITY AND SHALL BE APPROVED BY THE CLIENT.
- 6- FOR COORDINATE REFER TO FINISH GRADING DOCUMENTS.
- 7- REFERENCE COORDINATES E=1000,000 , N=1000,000 REFER TO X=437425, Y=3290543 UTM.
- 8- FINISH GRADING LEVEL (W0075) ELEVATION : +26.00 (MEAN SEA LEVEL)
+26.05 m (GLOBAL) = ±0.00 (LOCAL)
- 9- ALL EXTERNAL OPENINGS (WINDOWS AND DOORS) SHALL BE FIRE PROOF.
- 10- DOUBLE GLAZED WINDOW WITH 26mm REINFORCED GLASS AND 6mm GAS FILLED GLAZ.
- 11- WC DOORS SHALL BE WATERPROOF ABS TYPE WITH CLOSER MECHANISM.
- 12- KNAUF GYPSUM BOARD TILES (60*60 cm (REGULAR 9.5 mm THICKNESS) WITH (1063).
- 13- KNAUF PMVC-045 GYPSUM BOARD TILES (60*60 (REGULAR 9.5mm THICKNESS) WITH (1063)- (PVC THICKNESS 0.35mm).

LEGEND	
F.F.L.	FINISHED FLOOR LEVEL
T.O.G.	TOP OF GRAVEL
T.O.Wa.	TOP OF WALKWAY
T.O.P.	TOP OF PARAPET
T.O.Fou.	TOP OF FOUNDATION
T.O.D.	TOP OF DOOR
B.O.D.	BOTTOM OF DOOR
T.O.W.	TOP OF WINDOW
B.O.W.	BOTTOM OF WINDOW
T.O.R.	TOP OF ROOF
T.O.D.	TOP OF DOOR
T.O.Ca.	TOP OF CAGE
B.O.Ca.	BOTTOM OF CAGE

REFERENCE DRAWING	DRG. No.
STANDARD DRAWING FOR ARCHITECTURAL DETAILS	BK-GNRA-PEDCO-000-AR-DW-0001
STANDARD DETAILS FOR LADDER & SAFETY CAGE	BK-GNRA-PEDCO-000-ST-DW-0009
PLOT PLAN DRAWING - W007S	BK-W007S-PEDCO-110-PI-PY-0002
FOUNDATION DRAWING FOR SECURITY BUILDING FOR WELL PADS - W007S	BK-W007S-PEDCO-110-ST-DW-0008
STRUCTURAL DRAWING FOR SECURITY BUILDING FOR WELL PADS - W007S	BK-W007S-PEDCO-110-ST-DW-0009
HVAC SYSTEM LAYOUT FOR SECURITY BUILDING - W007S	BK-W007S-PEDCO-110-HV-PY-0002
PLUMBING & SEWAGE PIPING LAYOUT FOR SECURITY BUILDING - W007S	BK-W007S-PEDCO-110-EL-PY-0004
LIGHTING & SMALL POWER LAYOUT FOR SECURITY BUILDING - W007S	BK-SRGRL-PEDCO-110-EL-PY-0005

[illegible]

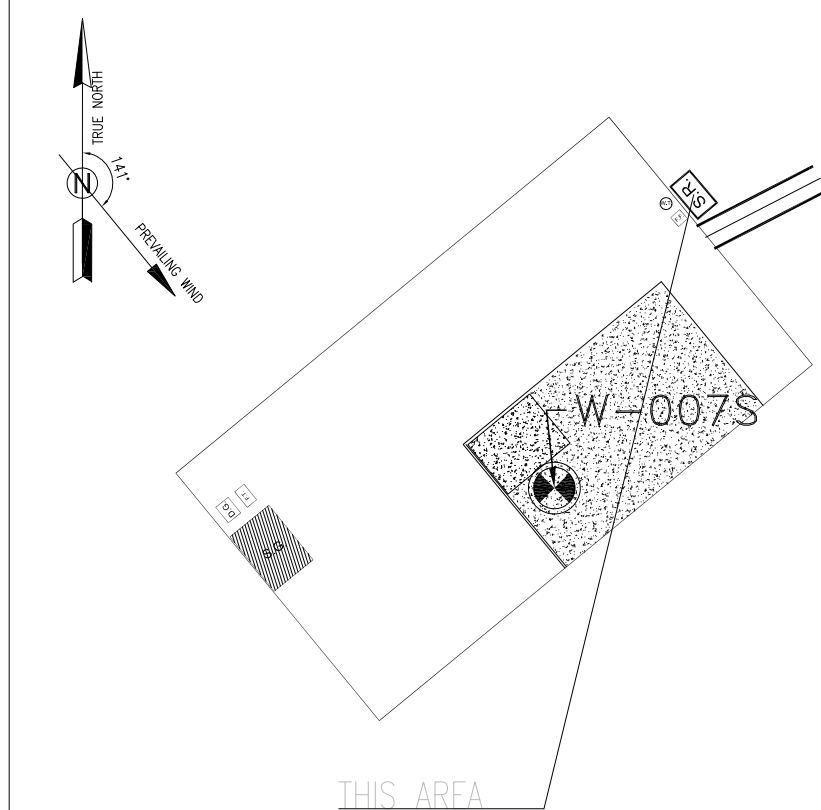


LEGEND	
	BRICK
	REINFORCED CONCRETE
	LEAN CONCRETE
	BLOCKAGE
	GRAVEL
	SAND CEMENT MORTAR

F.F.L.	FINISHED FLOOR LEVEL
T.O.G.	TOP OF GRAVEL
T.O.Wa.	TOP OF WALKWAY
T.O.P.	TOP OF PARAPET
T.O.Fou.	TOP OF FOUNDATION
T.O.D.	TOP OF DOOR
B.O.D.	BOTTOM OF DOOR
T.O.W.	TOP OF WINDOW
B.O.W.	BOTTOM OF WINDOW
T.O.R.	TOP OF ROOF
T.O.D.	TOP OF DOOR
T.O.Ca.	TOP OF CAGE
B.O.Ca.	BOTTOM OF CAGE

REFERENCE DRAWING	DRG. No.
STANDARD DRAWING FOR ARCHITECTURAL DETAILS	BK-GNRL-PRCO-000-AR-DW-0001
STANDARD DETAILS FOR LADDER & SAFETY CAGE	BK-GNRL-PRCO-000-ST-DW-0009
PLOT PLAN DRAWING – WOODS	BK-WG07S-PRCO-110-PI-PY-0002
FOUNDATION DRAWING FOR SECURITY BUILDING FOR WELL PADS – WOODS	BK-WG07S-PRCO-110-ST-DW-0006
STRUCTURAL DRAWING FOR SECURITY BUILDING FOR WELL PADS – WOODS	BK-WG07S-PRCO-110-ST-DW-0009
HVAC SYSTEM LAYOUT FOR SECURITY BUILDING – WOODS	BK-WG07S-PRCO-110-HV-PY-0002
PLUMBING & SWAGE TIEPIE LAYOUT FOR SECURITY BUILDING – WOODS	BK-WG07S-PRCO-110-EL-PY-0004
LIGHTING & SMALL POWER LAYOUT FOR SECURITY BUILDING – WOODS	BK-SGRL-PRCO-110-EL-PY-0005

KEY PLAN

[illegible]

WATERPROOFING (ISOGUME OR SIMILAR)

TERRAZZO TILE (30*30*2.5)

TERRAZZO TILE (30*30*2.5)

SAND CEMENT MORTAR

WATERPROOFING (ISOGUME OR SIMILAR)

LIGHT WEIGHT CONCRETE FOR SLOPING

HIGH DENSITY WOOL STONE INSULATION (100KG/M2)

ACCORDING TO STRUCTURAL DRAWING

D02

PRESSED BRICK

TRAVERTINE STONE

⊥60x60mm @500cm

EMBEDDED PLATE (100x100x8mm @500cm)

ACCORDING TO STRUCTURAL DRAWING

CEMENT PLASTER

EXPANSION JOINT TANGENT TO THE WALL CORNER
ACCORDING TO IRAN KNAUF CO. STANDARDS

.....

PARAPET DETAIL

SC. 1:10

13 EXPANSION JOINT DETAIL OF SUSPENDED CEILING

SC. 1:10

EXPANSION BOLT
Ø8 AT 100 C/C

TYPICAL PIPE CLIP ON TRAPEZOIDAL SHEET

SC. 1:5

NOTES

- 1- DIMENSIONS ARE IN "mm" AND ELEVATIONS IN "m" UNLESS SPECIFIED .
- 2- ALL DIMENSIONS AND ELEVATIONS SHALL BE CHECKED BY THE CONTRACTOR PRIOR TO CONSTRUCTION.
- 3- CONTRACTOR SHALL COMPARE ALL ARCHITECTURAL, MECHANICAL, ELECTRICAL, PIPING AND STRUCTURAL DRAWINGS AND IN CASE OF ANY CONFLICTS OR DISCREPANCY, INFORM THE ENGINEER.
- 4- SLAB ON GRADE SHALL BE CONSTRUCTED AFTER EXECUTION OF CABLE TRENCH & EQUIPMENTS FOUNDATION.
- 5- ALL MATERIALS ARE SELECTED FROM THE HIGHEST QUALITY AND SHALL BE APPROVED BY THE CLIENT.
- 6- FOR COORDINATE REFER TO FINISH GRADING DOCUMENTS.
- 7- REFERENCE COORDINATES E=1000.00m, N=100.000m REFER X=437426 , Y=3290543
- 8- FINISH GRADING LEVEL (W0075) ELEVATION : +26.00m (MEAN SEA LEVEL)
+26.05 m (GLOBAL) +26.00 (LOCAL)
- 9- ALL EXTERNAL OPENINGS (WINDOWS AND DOORS) SHALL BE FIRE PROOF.
- 10- DOUBLE GLAZED WINDOW WITH 26mm RAINFORGED GLASS AND 6mm GAS FILLED GAP.
- 11- WC DOORS SHALL BE WATERPROOF ABS TYPE WITH CLOSER MECHANISM.
- 12- KNAUF GYPSUM BOARD TILES (60*60) cm (REGULAR 9.5 mm THICKNESS) WITH (1063).
- 13- KNAUF PVC-COATED GYPSUM BOARD TILES (60*60)-(REGULAR 9.5mm THICKNESS) WITH (1063)- (PVC THICKNESS 3.5mm).

LEGEND

BRICK

REINFORCED CONCRETE

LEAN CONCRETE

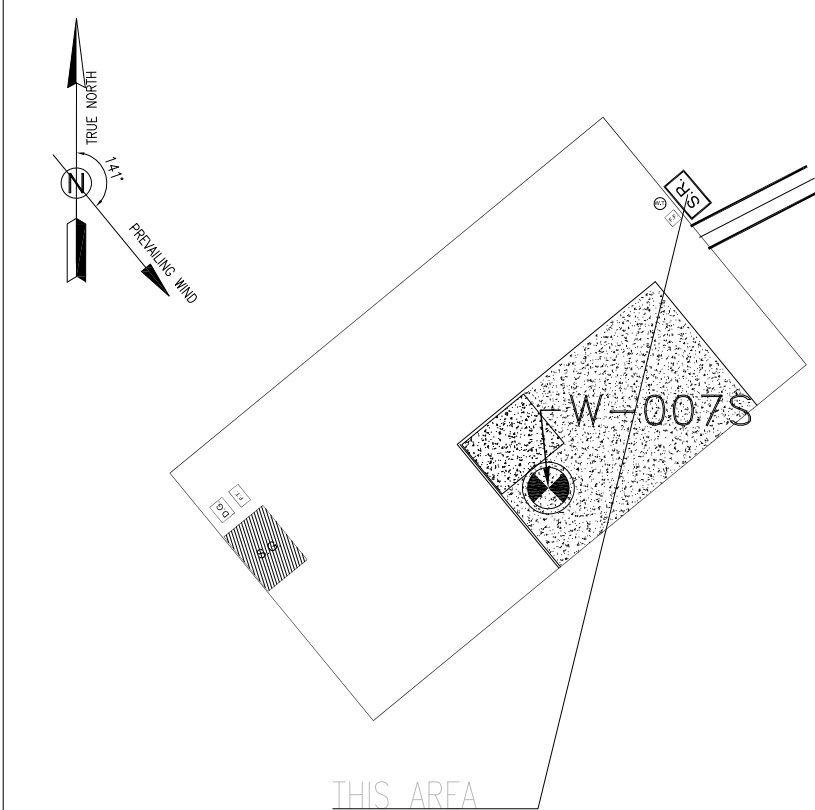
SAND CEMENT MORTAR

F.F.L.	FINISHED FLOOR LEVEL
T.O.G.	TOP OF GRAVEL
T.O.Wa.	TOP OF WALKWAY
T.O.P.	TOP OF PARAPET
T.O.Fou.	TOP OF FOUNDATION
T.O.D.	TOP OF DOOR
B.O.D.	BOTTOM OF DOOR
T.O.W.	TOP OF WINDOW
B.O.W.	BOTTOM OF WINDOW
T.O.R.	TOP OF ROOF
T.O.D.	TOP OF DOOR
T.O.Ca.	TOP OF CAGE
B.O.Ca.	BOTTOM OF CAGE

REFERENCE DRAWING

STANDARD DRAWING FOR ARCHITECTURAL DETAILS	BK-CNRL-PEDCO-000-ST-AR-DW-0001
STANDARD DETAILS FOR LADDER & SAFETY CAGE	BK-CNRL-PEDCO-000-ST-PY-DW-0002
PILOT PLAN DRAWING - W007S	BK-W007S-PEDCO-110-PI-SD-0003
FOUNDATION DRAWING FOR SECURITY BUILDING FOR WELL PADS - W007S	BK-W007S-PEDCO-110-PI-ST-DW-0008
STRUCTURAL DRAWING FOR SECURITY BUILDING FOR WELL PADS - W007S	BK-W007S-PEDCO-110-ST-DW-0009
IRVAC SYSTEM LAYOUT FOR SECURITY BUILDING - W007S	BK-W007S-PEDCO-110-HV-PI-0003
PLUMBING & SEWAGE PIPING LAYOUT FOR SECURITY BUILDING W007S	BK-W007S-PEDCO-110-HV-PY-0004
LIGHTING & SMALL POWER LAYOUT FOR SECURITY BUILDING W007S	BK-SSRGL-PEDCO-110-EL-HV-PM-0005

KEY PLAN

[illegible]