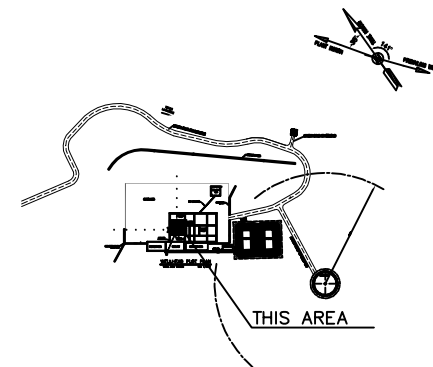


SC: 1/100

NOTES					
1. ESCAPE SIGNS SHALL BE FLUORESCENT AND INSTALLED ON THE ESCAPE WAY 1.8M ABOVE GROUND MEASURED TO THE BASE					
2. THE LOCATION OF ESCAPE SIGNS SHOWN ON THIS DRAWING SHALL BE IN THE PROXIMITY OF THE POINTS INDICATED.					
3. INSTALLATION HEIGHT OF SIGNS SHOULD BE AT LEAST 1.5 METER.					
LEGEND & ABBREVIATIONS					
Symbol	Description	QTY.	Symbol	Description	QTY.
Safety Equipment Sign			Warning Sign		
(S1)	Fire Extinguisher	5	(W1)	High Voltage	
(S2)	Safety Shower		(W2)	Hazardous Chemical	
(S3)	Sail-Combined Breathing Apparatus		(W3)	TOXIC GAS	1
(S4)	Wind Sock	1	(W4)	Speed Limit	
Fire Fighting Equipment Sign			(W5)	HOT SURFACE	1
(F1)	Deluge Valve		Mandatory Sign		
(F2)	Fire alarm HR		(M1)	Wear Ear Defenders	
(F3)	Fire Alarm Call Point		(M2)	Wear Safety Glasses	
(F4)	Fire Hydrant		(M3)	Wear Hard Hat	
(F5)	Fire Hydrant/Monitor		Emergency Escape Sign		
(F6)	Hose Box		(E1)	Fire Exit	2
(F7)	Isolation Valve		(E2)	Fire Exit - Right Side	
Prohibition Sign			(E3)	Fire Exit - Left Side	
(P1)	No Unauthorized Entry	2	(E4)	Way To Muster point	
(P2)	No Smoking & Fire	2	General Sign		
			(G1)	Titled Panel	
			(G2)	SDS	

REFERENCE DRAWING	DRG. No.
PLOT PLAN DRAWING - W008N	BK-W008N-PEDCO-110-PI-DW-0001
Safety & Fire Fighting Equipment Location Layout - W008N	BK-W008N-PEDCO-110-SA-PY-0002

## KEY PLAN

[illegible]