


V-2205
FUEL GAS K.O. DRUM

DIMENSION (ID X TL-TL): 438 X 2950 mm
DESIGN TEMP.: 85 °C
DESIGN PRESS.: IV/9 barg

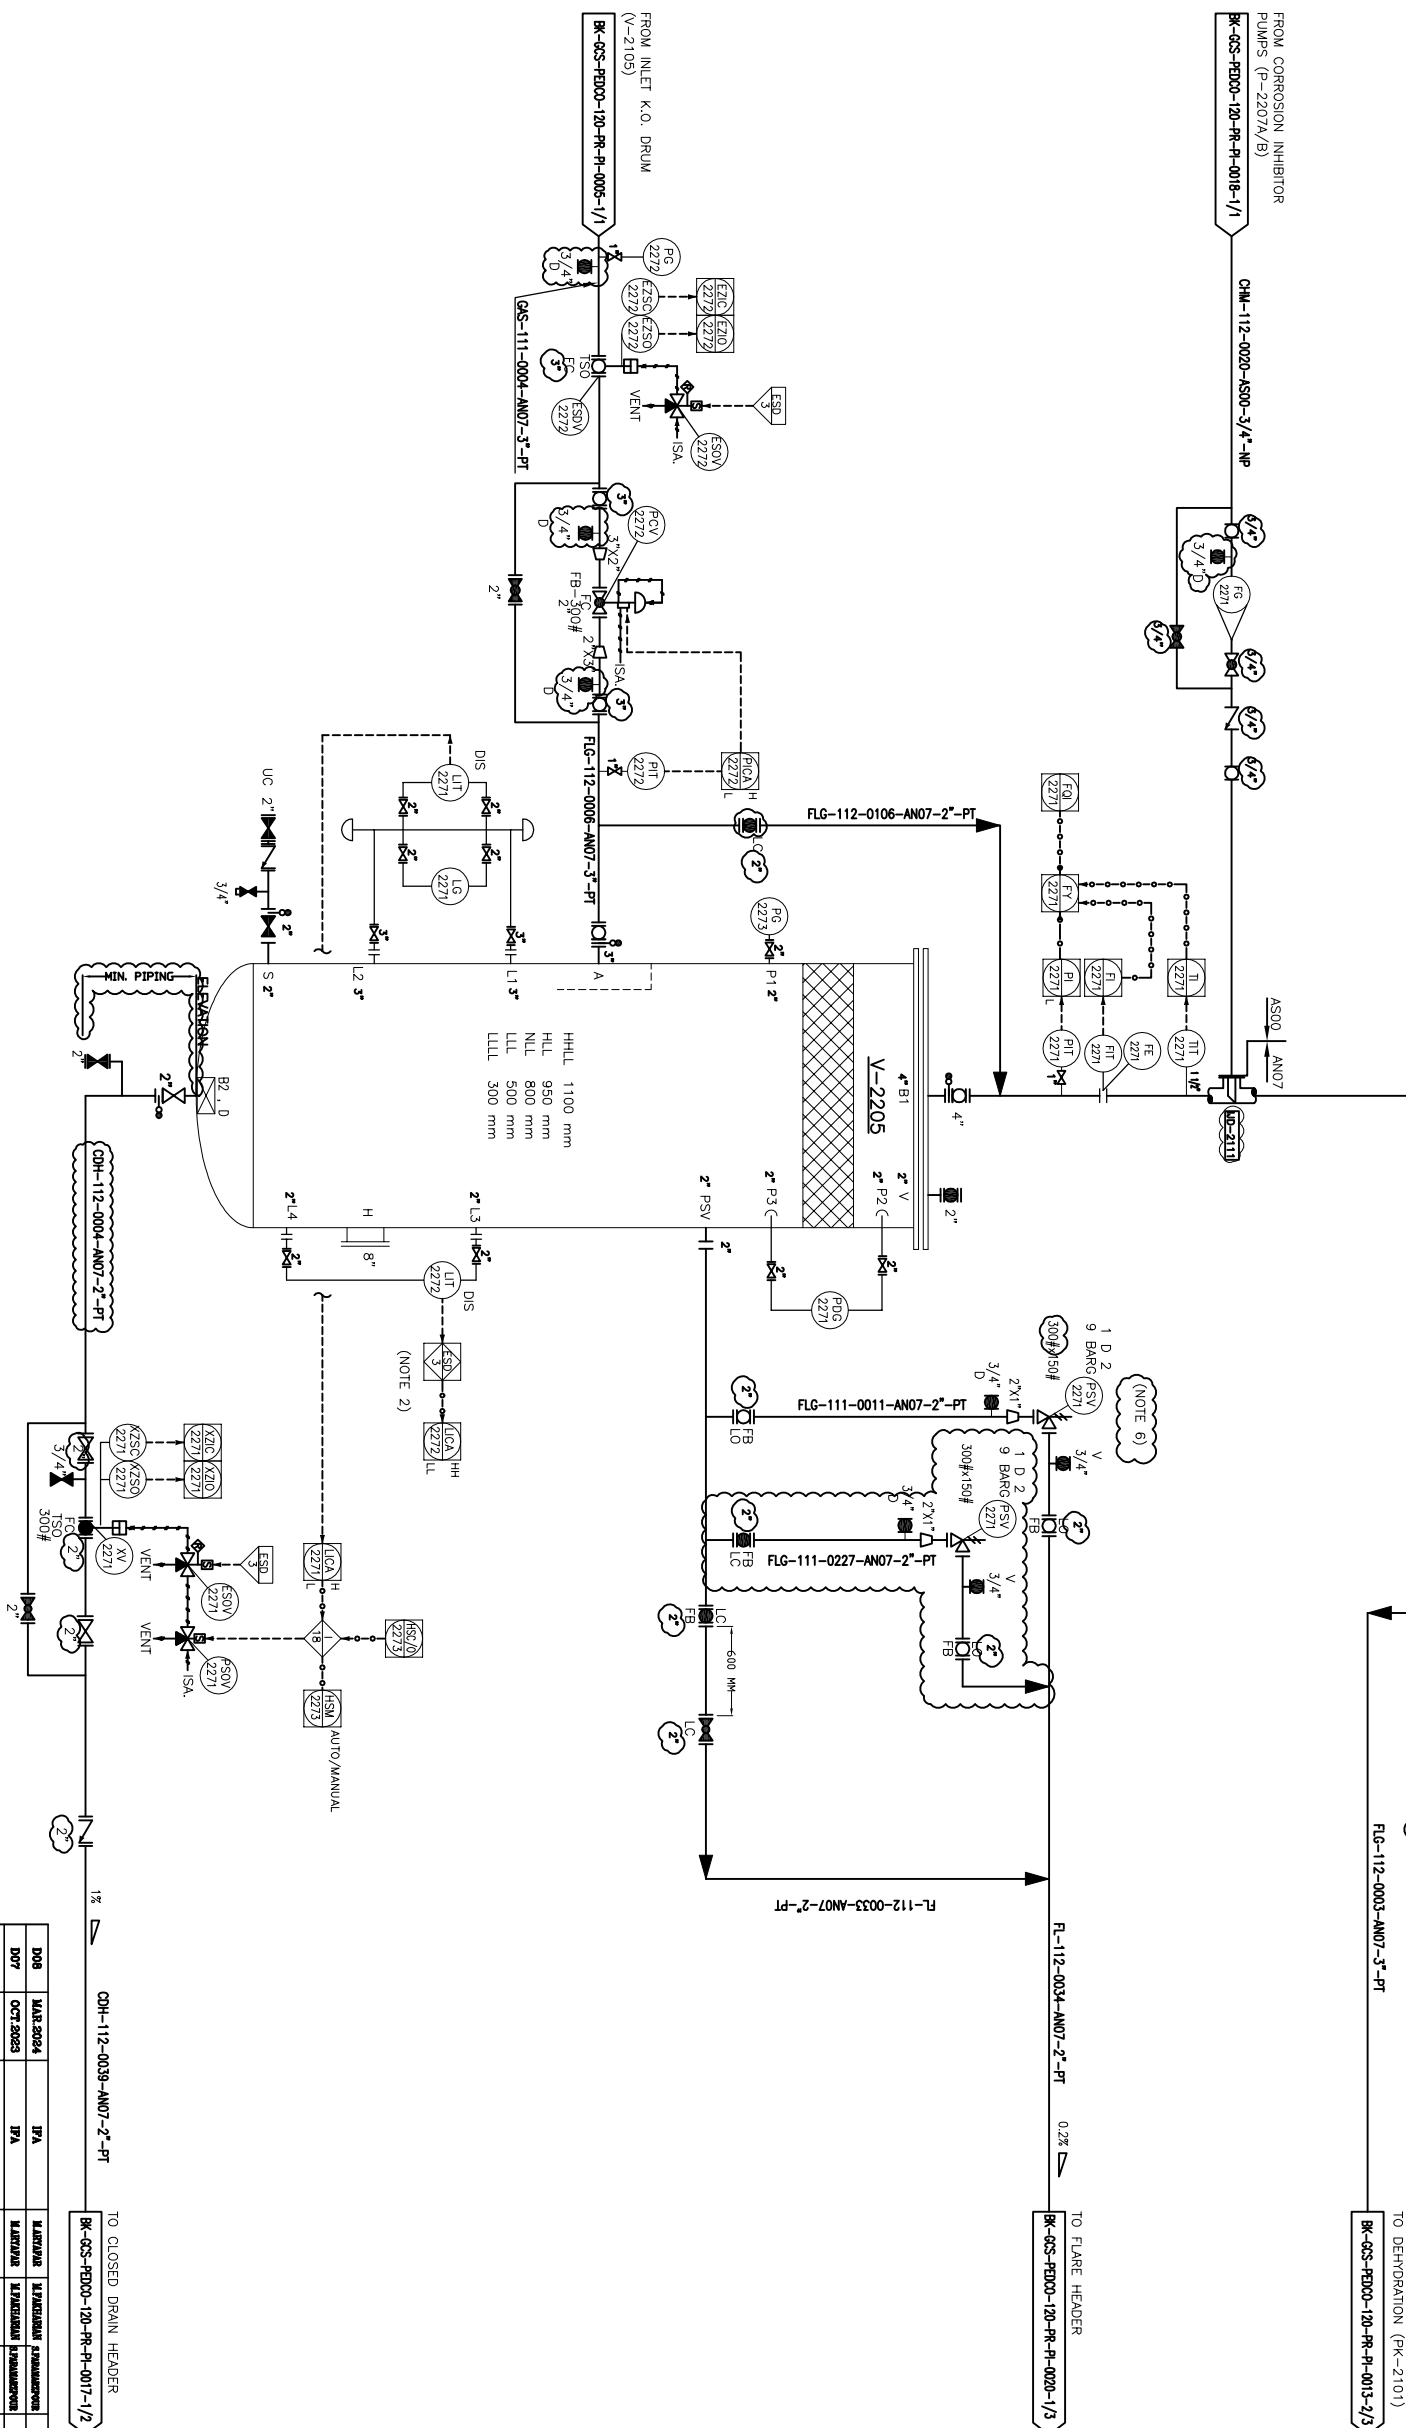

- 1- ONE PORTABLE WATER FOR CORROSION PROTECT TO BE PROVIDED PER SITE TO RECOVERY MONITOR CORROSION DATA.
- 2- ESD LEVEL 3 FOR HH & LL ALARM LIQUID LEVEL.
- 3- CONTROL VALVE SIZING WILL BE FINALIZED BY VENDOR.
- 4- PARTIAL STROKE DEVICE TO BE CONSIDERED FOR ALL ESD'S ACTIVATED BY ESD 1.0.
- 5- LINE SHALL BE EXPANDED TO MINIMUM 4" FOR CC INSTALLATION.
- 6- NO FIRM.
- 7- ALL DRAIN LINE SHALL BE CONNECTED TO CLOSED DRAIN HEADER.

GENERAL NOTE	
LEGEND	
REFERENCE DRAWING	DRG. No.
Utility Flow Diagram	BC-GCS-PEDCO-120-PR-UP-0001
Symbol & Legend For PFD & PAD	BC-GCS-PEDCO-120-PR-PF-0001

KEY PLAN					
REV.	DESCRIPTION	BY	DATE	BY	DATE
		CHECKED		REV. APPR.	

THE ORIGINAL AND ALL COPIES OF THIS DRAWING TOGETHER WITH
THE COPYRIGHT THEREIN ARE THE SOLE PROPERTY OF
N.I.S.O.C./ FIELDS

BINAK OILFIELD DEVELOPMENT SURFACE FACILITIES GAS COMPRESSOR STATION						
DATE	SCALE	DRAWING BY	CHECKED BY	PROJECT ENG.		
NO CONSTRUCTION PERMITTED UNLESS DRAWING APPROVED						
APPROVED FOR CONSTRUCTION			BY:		DATE:	
BIDDER REF.	LOCATION	SIZE	CLASS	SERIAL NO.	SHEET	REVISION
DSCS-0793-B134	7	2	A	704800	1 OF 1	D08